

**Philips 43BDL4511D/00 Signage Display Digital A-board 109.2 cm (43") 500 cd/m<sup>2</sup> 4K Ultra HD Black 24/7**

**Brand :** Philips

**Product code:** 43BDL4511D/00

**Product name :** 43BDL4511D/00




Philips 43BDL4511D/00. Product design: Digital A-board. Display diagonal: 109.2 cm (43"), Display resolution: 3840 x 2160 pixels, Display brightness: 500 cd/m<sup>2</sup>, HD type: 4K Ultra HD. Operating hours (hours/days): 24/7. Product colour: Black



<b>Display</b>		<b>Performance</b>	
Display diagonal *	109.2 cm (43")	On Screen Display (OSD)	✓
Display resolution *	3840 x 2160 pixels	On Screen Display (OSD) languages	Arabic
Display brightness *	500 cd/m <sup>2</sup>	Operating hours (hours/days)	24/7
HD type *	4K Ultra HD	<b>Power</b>	
Native aspect ratio	16:9	Power consumption (typical) *	62 W
Response time	8 ms	Power consumption (standby) *	0.5 W
Contrast ratio (typical)	1200:1	Power consumption (max)	170 W
Contrast ratio (dynamic)	500000:1	Energy efficiency class (SDR)	G
Viewing angle, horizontal	178°	Energy consumption (SDR) per 1000 hours	71 kWh
Viewing angle, vertical	178°	AC input voltage	100/240 V
Display number of colours	1.07 billion colours	AC input frequency	50 - 60 Hz
Pixel pitch	0.2451 x 0.2451 mm	Energy efficiency scale	A to G
Display diagonal (metric)	108 cm	<b>Computer system</b>	
Panel life	50000 h	Video formats supported	H.263, H.264, H.265, MPEG
<b>Ports &amp; interfaces</b>		Audio formats supported	AAC, HE-AAC
HDMI ports quantity *	3	Image formats supported	BMP, JPEG, PNG
HDMI version	2.0	<b>Weight &amp; dimensions</b>	
DVI port *	✓	Display width	973 mm
DVI-I ports quantity	1	Display depth	63.5 mm
DisplayPorts quantity *	2	Display height	561.2 mm
DisplayPorts in	1	Display weight	10.7 kg
DisplayPorts out	1	Base width	56.1 cm
USB port *	✓	Width	973 mm
USB ports quantity	2	Depth	63.5 mm
USB version	2.0	Weight	10.7 kg
Ethernet LAN *	✓	<b>Packaging content</b>	
Ethernet LAN (RJ-45) ports	1	Remote control included	✓
Audio (L/R) in	1	Batteries included	✓
Audio (L/R) out	1	Cables included	AC, IR sensor, RS-232
RS-232C	✓	<b>Operational conditions</b>	
Remote (IR) input	1	Operating temperature (T-T)	0 - 40 °C
Remote (IR) output	1	Operating relative humidity (H-H)	20 - 80%
OPS module slot	✓	Storage temperature (T-T)	-20 - 60 °C
<b>Audio</b>		Storage relative humidity (H-H)	5 - 95%
Built-in speaker(s) *	✓		
Number of built-in speakers	2		
RMS rated power	10 W		
<b>Design</b>			
Product design *	Digital A-board		
Placement supported *	Indoor		

Design		Certificates	
Product colour *	Black	Certification	CE FCC Class A CCC Restriction of Hazardous Substances (ROHS) CB BSMI EMF VCCI PSB ETL CECP EAC Energy Star 8.0
VESA mounting *	✓		
Panel mounting interface	200 x 200 mm		
Performance		Other features	
Purpose *	Commercial	Maximum refresh rate	60 Hz

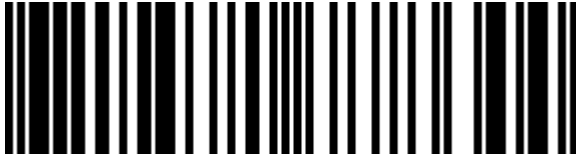

8712581778644

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 13-MAY-2024. Prints or copies of Information are only valid on the printed Publication date