

# AXIS Camera Station S9302 Workstation

Powerful, plug-and-play workstation

Extensively tested and validated with a wide range of Axis products, this powerful workstation can be used either as a client when connected to the server, or as a server when used in combination with AXIS S30 Series. It supports up to four 4K resolution monitors for optimal overview. With a small form factor, it's ideal wherever space is limited. It comes preloaded with AXIS Camera Station client software. Plus, the integrated AXIS Recorder Toolbox installation wizard ensures quick and easy installation. Furthermore, it includes next business day on-site hardware replacement, 5-year warranty, and one point-of-contact for support.

- > [Scalable and powerful solution](#)
- > [Supports up to four 4K monitors](#)
- > [AXIS Camera Station client software included](#)
- > [Extensive support and 5-year warranty](#)



# AXIS Camera Station S9302 Workstation

## Hardware

<b>Processor</b>	Intel® Core™ processor
<b>Memory</b>	16 GB (2 X 8 GB)
<b>Graphics card</b>	Intel® UHD graphics
<b>Power</b>	300 W 80+ Platinum (100–240 V AC, 4.2 A, 50/60 Hz)
<b>Connectors</b>	<b>Front side:</b> 1x Universal audio jack 2x USB 2.0 1x USB 3.2 1x USB 3.2 gen 2 2x2 USB-C port <b>Rear side:</b> 1x Universal audio jack 1x DisplayPort™ 1.4a 1x Header for remote power button 4x USB 3.2 2x USB 2.0 1x RJ45 Ethernet 3x Mini DisplayPort™ 1.4

## Video

<b>Video streaming</b>	Live view: 1 stream x 4K at 30 fps 4 split x 1080p at 30 fps 9 split x 720p at 30 fps 16 split x 360p at 15 fps 25 split x 360p at 15 fps 36 split x 360p at 15 fps Any combination of the above for maximum four 4K monitors where only two monitors can show streams at 30 fps. <b>Playback:</b> Supports the same split scenarios as for live view.
------------------------	---

## Cybersecurity

<b>Documentation</b>	<i>AXIS OS Hardening Guide</i> <i>Axis Vulnerability Management Policy</i> <i>Axis Security Development Model</i> AXIS OS Software Bill of Material (SBOM) To download documents, go to <a href="https://axis.com/support/cybersecurity/resources">axis.com/support/cybersecurity/resources</a>
----------------------	---


To read more about Axis cybersecurity support, go to [axis.com/cybersecurity](https://axis.com/cybersecurity)

## General

<b>Operating system</b>	Microsoft® Windows® 10 IoT Enterprise LTSC 2021 Built-in operating system recovery: yes Operating system drive: 256 GB SSD
<b>Security</b>	Support for encrypted operating system drive FIPS 140-2 level 2 certified Trusted Platform Module (TPM 2.0)
<b>Operating conditions</b>	0 °C to 45 °C (32 °F to 113 °F) Humidity 20–80% RH (non-condensing)
<b>Storage conditions</b>	–40 °C to 65 °C (–40 °F to 149 °F) Humidity 5–95% RH (non-condensing)
<b>Approvals</b>	<b>EMC</b> EN 55032 Class B, EN 55035, EN 61000-3-2, EN 61000-3-3, FCC Part 2 & 15 Class B, ISED ICES-003 Class B, RCM AS/NZS CISPR 32 Class B, KS C 9832 Class B, KS C 9835, VCCI 32-1 Class B, BSMI <b>Safety</b> IEC/EN/UL 62368-1, EN 62311, NOM-019-SCFI-1998
<b>Compliance</b>	TAA (Trade Agreements Act)
<b>Dimensions</b>	290 x 93 x 293 mm (11,4 x 3,7 x 11.5 in)
<b>Weight</b>	4,5 kg (9.8 lbs)
<b>Included accessories</b>	3x Mini DisplayPort™ to DisplayPort™ adapters Wall plug power cord
<b>Optional accessories</b>	Axis joysticks and control boards For more accessories, see <a href="https://axis.com">axis.com</a>
<b>Services</b>	Next Business Day Onsite Support
<b>Warranty</b>	5-year warranty, see <a href="https://axis.com/warranty">axis.com/warranty</a>
<b>Export control</b>	This product is subject to export control regulations, and you should always comply with all applicable national and international export or re-export control regulations.

## AXIS Camera Station

For details about AXIS Camera Station features and functions, see the AXIS Camera Station datasheet on [axis.com](https://axis.com)

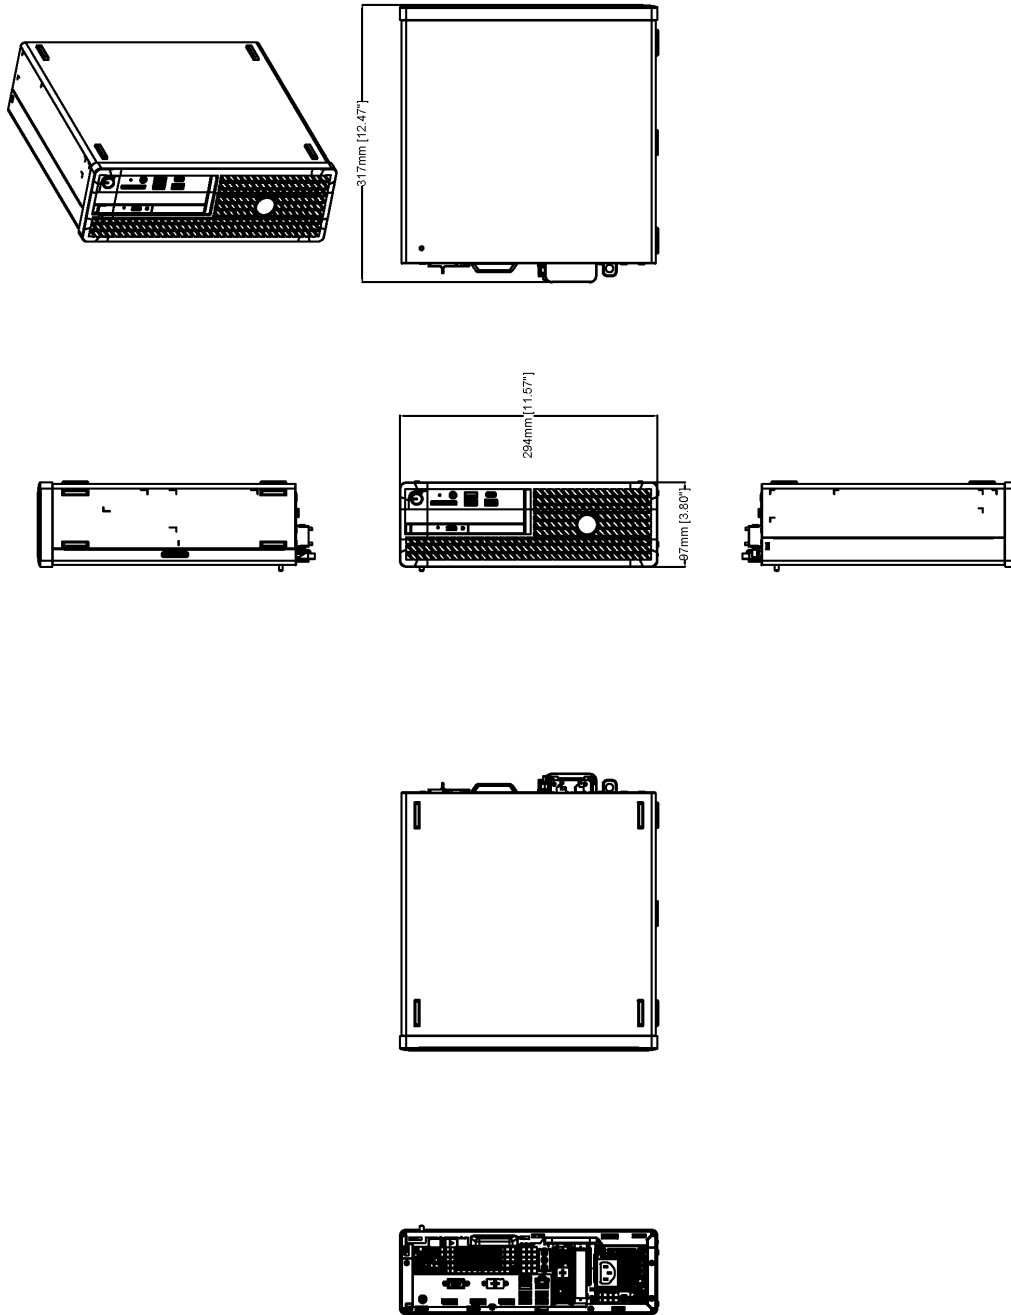

Revision	v.01	Revision date	2022-12-05
Paper size	A4	Release date	2022-12-05
Created by	MS	Scale	1:1

© 2022 Axis Communications

**AXIS**<sup>®</sup> COMMUNICATIONS  
www.axis.com  
**AXIS S9302**