Lindy DST-Pro 101, USB-C Laptop Docking Station with 4K Support and 100W Power Supply

Brand : Lindy

Product code: 43378

Product name : DST-Pro 101, USB-C Laptop Docking Station with 4K Support and 100W Power Supply

- Connects a DisplayPort and/or up to 2 HDMI displays, USB peripherals and powers the laptop over a single cable
- Supports 4K 3840x2160 60Hz for a single or 2560x1440 60Hz for dual displays
- Integrates a 4 port USB SuperSpeed 5Gbps Hub (3x Type A, 1x Type C)
- Included 100W Power Supply to charge the laptop while using the DST-Pro 101
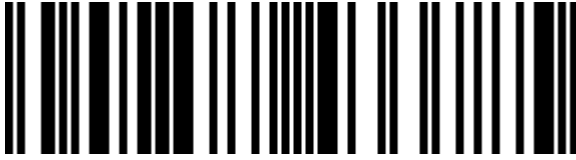- 2-year warranty

DST-Pro 101, USB-C Laptop Docking Station with 4K Support and 100W Power Supply
Lindy DST-Pro 101, USB-C Laptop Docking Station with 4K Support and 100W Power Supply. Connectivity technology: Wired, Host interface: USB 3.2 Gen 2 (3.1 Gen 2) Type-C. Ethernet LAN data rates: 10,100 Mbit/s. Product colour: Grey, Compatible memory cards: MicroSD (TransFlash), SD, Data transfer rate: 5 Gbit/s. Power source type: DC, Power consumption (typical): 25 W. Sustainability certificates: CE, Federal Communications Commission (FCC), REACH, RoHS

Ports & interfaces

Connectivity technology *	Wired
Host interface *	USB 3.2 Gen 2 (3.1 Gen 2) Type-C
USB 2.0 ports quantity *	2
USB 3.2 Gen 1 (3.1 Gen 1) Type-A ports quantity *	3
USB 3.2 Gen 1 (3.1 Gen 1) Type-C ports quantity	1
USB Power Delivery	✔
USB Power Delivery revision	3.0
HDMI ports quantity *	2
DisplayPorts quantity	1
Microphone in *	✔
Headphone outputs *	1
DC-in jack	✔
HDCP	✔
HDCP version	2.2
USB Type-C DisplayPort Alternate Mode	✔

Network

Ethernet LAN *	✔
Ethernet LAN (RJ-45) ports	1
Ethernet LAN data rates	10,100 Mbit/s
Wake-on-LAN ready	✔

Performance

Card reader integrated *	✔
Compatible memory cards	MicroSD (TransFlash), SD
Data transfer rate	5 Gbit/s
HD type	4K Ultra HD
Maximum digital resolution	3840 x 2160 pixels

Power

Power consumption (typical)	25 W

Software

Windows operating systems supported	✔
Mac operating systems supported	✔
Linux operating systems supported	✔
Mobile operating systems supported	✔

Operational conditions

Operating temperature (T-T)	0 - 40 °C
Storage temperature (T-T)	-20 - 60 °C
Operating relative humidity (H-H)	5 - 90%
Storage relative humidity (H-H)	5 - 90%

Sustainability

Sustainability compliance	✔
Sustainability certificates	CE, Federal Communications Commission (FCC), REACH, RoHS

Weight & dimensions

Width	122 mm
Depth	122 mm
Height	55 mm
Weight	500 g

Packaging data

Quantity per pack	1 pc(s)
Package width	450 mm
Package depth	340 mm
Package height	345 mm
Package weight	1.73 kg

Performance		Packaging content	
Number of displays supported	3	Cables included	AC, USB Type-C
Product colour *	Grey	AC adapter included	✔
Plug and Play	✔	Manual	✔
Housing material	Aluminium		

Power	
Power source type	DC

4002888433785