

# Battery Pack

Tapo A100

 6700mAh Large Capacity



Rechargeable Lithium Battery



Quick Release & Replacement



6-Way Protection for Safe Charging



## // Features

### · **6700mAh Large Capacity**

Extends the usage time (up to 180 days)\* of your Tapo battery-powered cameras and video doorbells, freeing you from frequent charging.

### · **Works with Tapo battery-Powered Cameras and Video Doorbells**

Compatible with Tapo C420, Tapo C400, and Tapo D230. More products will be supported in the future.

### · **Quick Release & Replacement**

Release or install the battery within minutes. Ideal for backup and no need to waste time waiting for charging when the original one is run out.

### · **6-Way Protection for Safe Charging**

Get your battery fully charged in around 5 hours\*\* with multiple safeguards protecting it from over-charging, over-discharging, short-circuiting, over-heating, output over-voltage and output over-current.


\*180-day battery life is based on TP-Link laboratory testing data with 10-20 events triggered per day. Actual battery life may vary based on use scenarios.

\*\*5-hour battery charging time is based on TP-Link's laboratory testing. Actual charging time may vary based on adapter specifications and environmental temperature.

## // Specifications

- Battery Capacity: 6700mAh
- Output Voltage : 3.6V
- Max Charging Voltage, Current : 5V ,1.5A
- Dimensions (L x W x H): 2.77 × 1.63 × 0.87 in. (70.5 × 41.4 × 22 mm)
- Package Contents:
  - Tapo A100
  - Quick Start Guide
  - USB Adapter Cable
- Certifications: CE, RoHS, RCM,
- Operating Temperature: -20 °C – 45 °C (-4 °F – 113 °F)
- Storage Temperature: -20 °C ~ 45 °C (-4 °F ~ 113 °F)
- Charging Temperature: 0 °C ~ 45 °C (32 °F ~ 113 °F)
- Operating Humidity: 10% ~ 90%RH, Non-condensing
- Storage Humidity: 5% ~ 90%RH, Non-condensing

## // Product Appearance

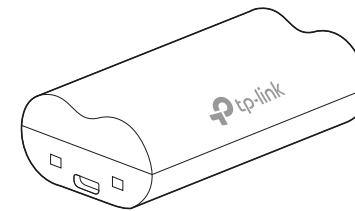

Scan the QR code or visit  
<https://www.tapo.com/product/tapo-a100/> to view product details and check applicable devices.

