
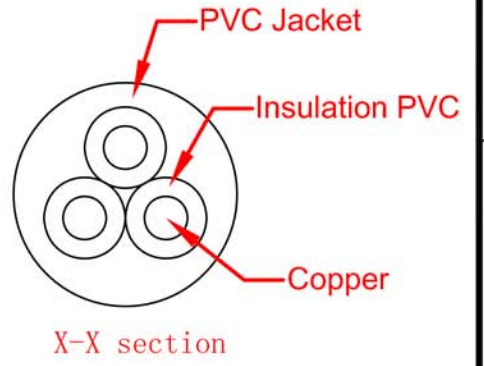
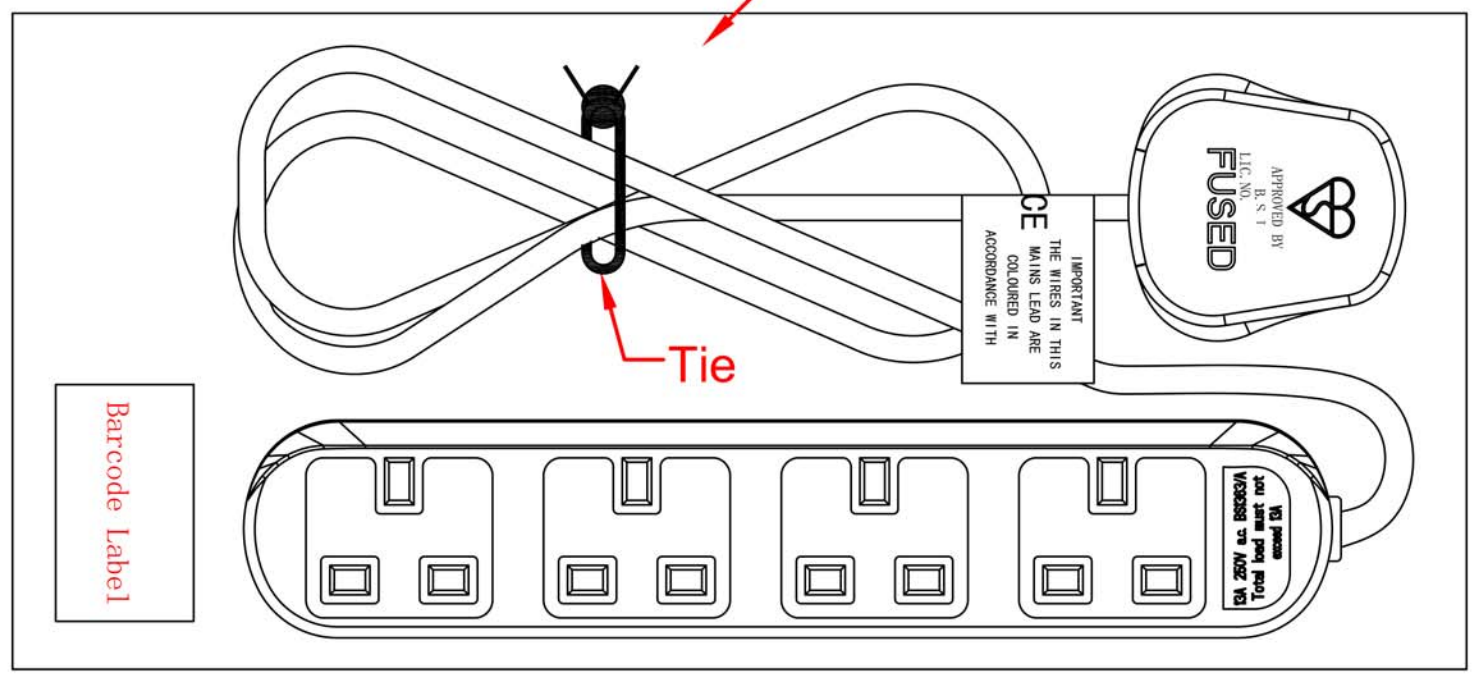


Dimension	0-8	8-25	25-50	50-100	100-200	200-300	∠ (度)
Tolerance	±0.08	±0.10	±0.12	±0.18	±0.20	±0.30	±0.20°
Mark	Modified	Modified Record		Edition	Publish	Approval	Date
				P2			2015-07-14

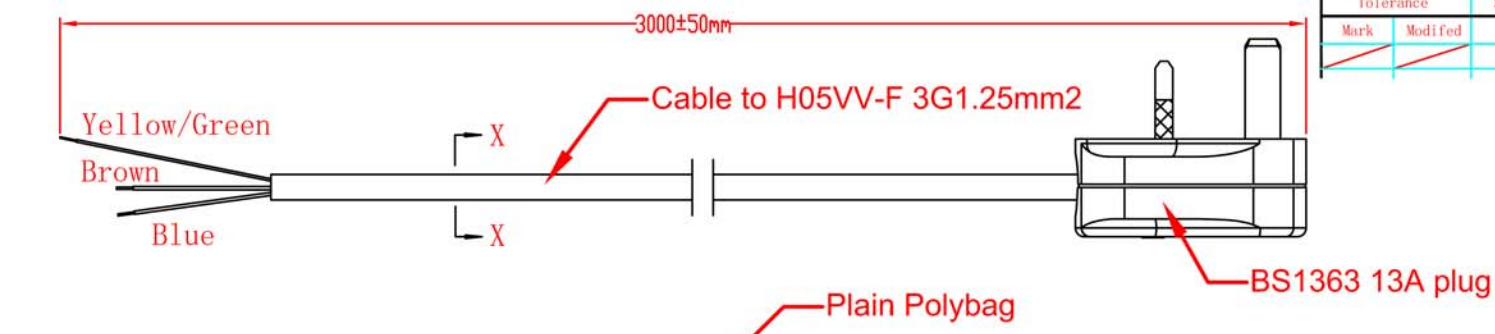

Technical requirements:

1. Plug should be Kitemark certified to BS1363-1, socket meet BS1363-2
2. Cable should be standard of EN50525 or meet equivalent standards
3. Products should meet relevant Rohs directive

DRAW:		DATE: 2014-07-11	PRODUCT NAME: 27-4030	<input type="checkbox"/> FIRST PROJECT
DESIGN:		DATE: 2014-07-11		<input checked="" type="checkbox"/> THIRD PROJECT
CHECK:		DATE: 2014-07-11	PART NAME:	PAGE: 1 OF 1
APPROVAL:		DATE: 2014-07-11	PART NUMBER: XXXXXXXX	EDITION: A3 P2
MATERIAL: xxxx		UNIT: mm	WEIGHT:	
MATT: xxxx		SCALE: xxxx	xxxxgm	