



RoHS & REACH Compliant

Signature	Revision History	Date	Rev.
Uda	REV: NEW ISSUE	AUG 04, 2018	001

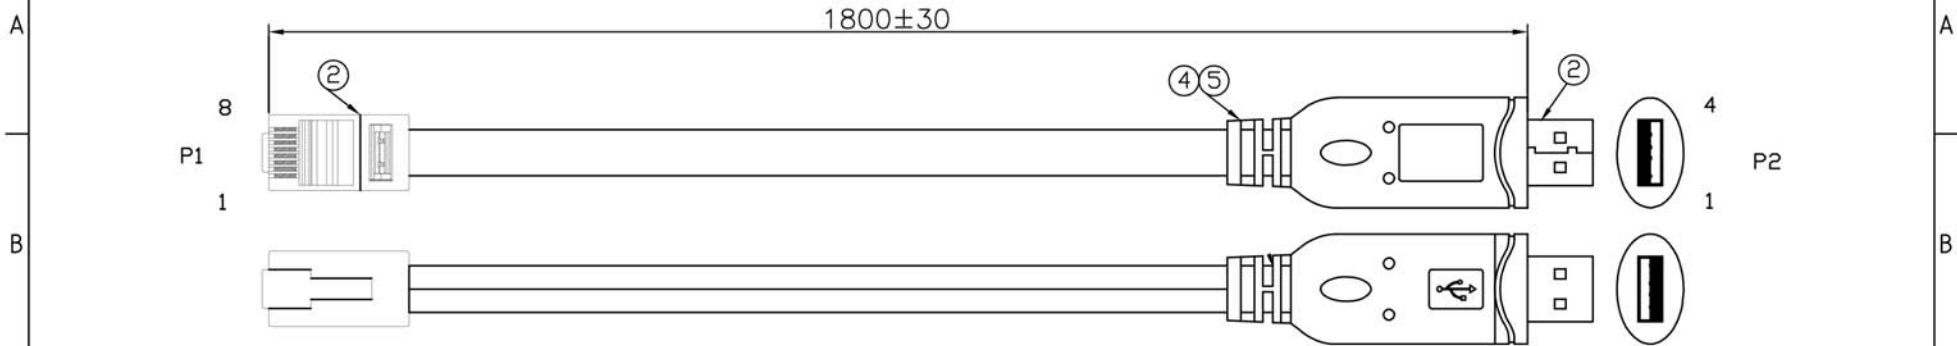

NOTES:  
ELECTRICAL TEST:

- 1: 100% SHOTR, OPEN AND MISS WIRE TEST.
- 2: CONTACT RESISTANCE: 0.5 OHM
- 3: INSULATOR RESISTANCE: 5M ohm
- 4: HIGH VOLTAGE: DC 300V 0.01SEC

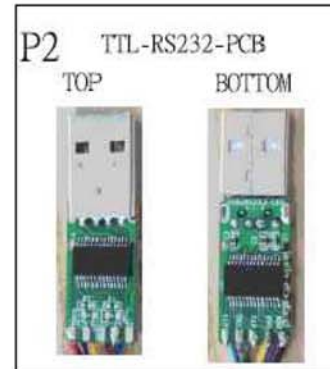

PIN OUT

P1		P2	
1	GREEN	CTS#	
2	BLUE	DSR#	
3	ORANGE	RXD	
4	BLACK	GND	
5	RED	GND	
6	YELLOW	TXD	
7	PURPLE	DTR#	
8	BROWN	RTS#	

NO	NAME	SPECIFICATIONS	Q'TY	UNIT
⑤	OUTER MOLDED	45P, LIGHT BLUE PVC	8.5	G
④	INNER MOLDED	LDPE	2.5	G
③	CONNECTOR	RS232 FT232RL+ZT213+PCB USB A MALE, NICKEL PLATED SHELL, WHITE INSULATOR	1	PCS
②	CONNECTOR	RJ45 8P8C MALE: GOLD FLASH CONTACTS.	1	PCS
①	CABLE	UL20251, 28AWG(7/0.12BC)*8C, LIGHT BLUE PVC JACKET, OD=2.5*8.5	1800	MM

Ltemref	Quantity	Title/Name,designation,material,dimension etc			Article No./Reference	
Designed by	Checked by	Approved by - date	File name	Date	Scale	
		AUG 02.2018		AUG 02.2018	FREE	
ANGLE:	USB RS232 FT232RL TO RJ45 8P8C M					
UNIT-MM				Edition	Sheet	
				1	1/1	