Viewsonic LS710HD data projector Standard throw projector 4200 ANSI lumens 1080p (1920x1080) White
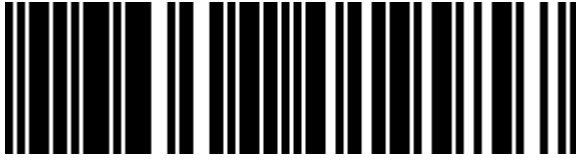
Brand : Viewsonic

Product code: LS710HD

Product name : LS710HD

- 2nd generation laser phosphor technology with up to 30,000 hours lifespan
- 4,200 ANSI Lumens offering bright images in any environment
- Up to 300" ultra large screen that is easily installed and set up
- 0.49 short throw for immersive edge blending without any shadows
- Installation flexibility: H/V keystone, 4 corner adjustment, 360° projection and portrait mode
- HDMI 2.0b for accessibility of 4K contents with HDR/HLG support
Full HD, 4200 ANSI, 3000000:1, 1.07 B, 2, 15W x2, RJ45, HDMI, Audio-out, RS232, USB, 100-240 V, 4.5 kg

Projector

Smart projector *	✘
Screen size compatibility *	1016 - 7620 mm (40 - 300")
Projection distance	0.43 - 3.25 m
Projector brightness *	4200 ANSI lumens
Projector native resolution *	1080p (1920x1080)
Contrast ratio (typical) *	3000000:1
Native aspect ratio *	16:9
Number of colours	1.07 billion colours
Horizontal scan range	15 - 102 kHz
Vertical scan range	23 - 120 Hz
Keystone correction, horizontal	-15 - 15°
Keystone correction, vertical	-15 - 15°

Light source

Light source type *	Laser
Service life of light source *	20000 h
Service life of light source (economic mode)	30000 h

Lens system

Focus *	Manual
Fixed focal length	7.51 mm
Fixed aperture	2.8
Zoom capability	✔
Zoom type	Manual
Digital zoom	2x
Throw ratio	0.49
Offset	132%

Video

Analog signal format system *	NTSC, PAL, SECAM
Full HD *	✔
3D *	✘
Supported video modes	480i, 480p, 576i, 576p, 720p, 1080i, 1080p, 2160p

Ports & interfaces

HDMI connector type	Full-size
HDMI version	2.0
Service port type	USB Type-A
USB 2.0 ports quantity *	1
USB 2.0 Type-A ports quantity	1
Serial interface type *	RS-232
PC Audio out	✔
HDMI ports quantity *	2

Network

Wi-Fi *	✘

Storage

Card reader integrated *	✘

Features

Interactive *	✘
Noise level (economic mode)	29 dB
HDCP	✔
On Screen Display (OSD)	✔
On Screen Display (OSD) languages	Danish, German, Hungarian, Arabic, Dutch, Norwegian, English, Indonesian, Swedish, Spanish, Italian, Polish, Thai, Japanese, Portuguese, Turkish, Romanian, Simplified Chinese, Finnish, Korean, Russian, Vietnamese, Traditional Chinese, French, Greek, Czech, Slovak
Number of OSD languages	27
HDCP version	1.4/2.2
Noise level *	32 dB

Multimedia

Built-in speaker(s) *	✔
RMS rated power	30 W
Number of built-in speakers	2

Design

Market positioning *	Business
Product type *	Standard throw projector
Product colour *	White
Cable lock slot	✔
Cable lock slot type	Kensington

Display

Built-in display *	✘

Power

Power source *	AC
Power consumption (typical) *	245 W
Power consumption (standby) *	0.5 W
AC input voltage	100 - 240 V
AC input frequency	50 - 60 Hz

Operational conditions

Operating temperature (T-T)	0 - 40 °C

Ports & interfaces

DVI port *	✘
AC (power) in	✔

Network

Smart TV *	✘
Ethernet LAN *	✔
Ethernet LAN (RJ-45) ports	1

Weight & dimensions

Width	337 mm
Depth	265 mm
Height	131.5 mm
Weight *	4.5 kg
Package width	496 mm
Package depth	195 mm
Package height	387 mm
Package weight	6.6 kg

Packaging content

Remote control included *	✔
Quick start guide	✔
Warranty card	✔

Technical details

Image lag time	49.9 ms

Logistics data

Quantity per pack	1 pc(s)

0766907019957

766907019957