



Micro HDMI Dongle Adapters

- Converts a Micro HDMI Digital A/V signal to Standard HDMI, DVI and VGA
- Maximum resolution of 1080p (1920x1200)
- Plug & play, powered by the HDMI source device and USB power
- Utilizes Micro USB for Power (VGA dongle)

Electrical Characteristics:

Resolutions Supported:	480i/480p, 576i/576p, 800x600, 720i/720p 1280x1024, 1600x1200, 1080i/1080p
Voltage:	5V, 500mA
Voltage Rating:	30V
Pixel clock rate:	Up to 165MHz
Impedance :	100±5
Intra-pair skew:	15ps/m max

Physical Characteristics:



Minimum Bend Radius:	12mm
Operating Temperature:	0°C to 70°C
Storage Temperature:	-10° to 40° C
Adapter Length:	203mm
Approvals:	CE

Conductor (Qty. 3):

Conductor Type:	34AWG 7/0.06TCS x15
Insulation:	Foam-PE, $\varnothing 0.5 \pm 0.05$
Shield:	AL Wrap; Braid, 16/6/0.8TCS 85% Coverage
Drain:	34AWG 7/0.6TCS

Overall Cable

Jacket:	PVC, Black
OD:	4.8 \varnothing 0.15

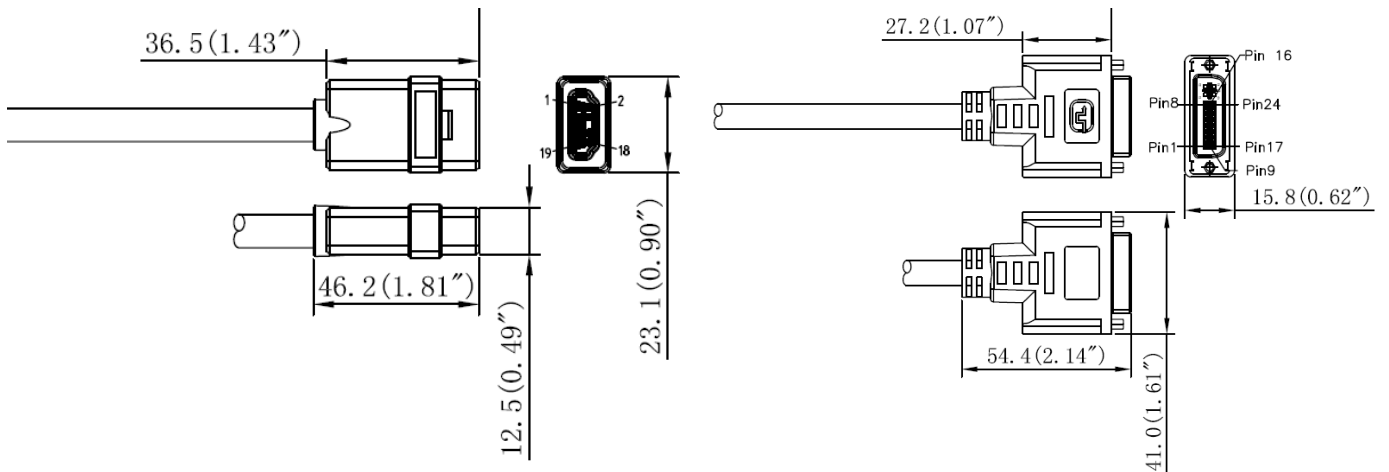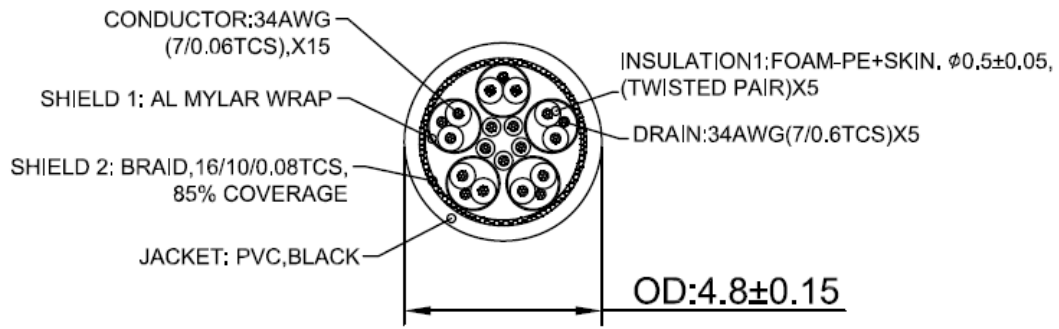

Part Number	Description	Weight (Kg)
80509	HDMI Micro Male to HDMI Female Adapter Converter Dongle	
80510	HDMI Micro Male to DVI Female Adapter Converter Dongle	
80511	HDMI Micro Male to VGA and Stereo Audio Female Adapter Converter Dongle	



Cables To Go
 Road 30 Hortonwood Industrial Estate
 Telford, Shropshire TF1 7AB UK
 UK Phone (0)800 328 2916
 EMEA Phone +44 (0)1952 677300
www.c2g.com

Follow Us

