



## Lindy 5m USB 3.0 Hub 4 Ports

**Brand :** Lindy

**Product code:** 43388

**Product name :** 5m USB 3.0 Hub 4 Ports


- High performance hub with active cable that provides an extended 5m connection between a computer and up to 4 USB devices
- Connects 2 USB Type A and 2 Type C peripherals to a computer's USB Type A Port
- Supports the USB 3.2 / 3.1 Gen 1 / USB 3.0 SuperSpeed bandwidth for speeds of 5Gbps
- USB Bus powered, with DC socket for external power supply (not included)
- 2 year warranty

5m USB 3.0 Hub 4 Ports

Lindy 5m USB 3.0 Hub 4 Ports. Host interface: USB 3.2 Gen 1 (3.1 Gen 1) Type-A, Hub interfaces: USB 3.2 Gen 1 (3.1 Gen 1) Type-A, USB 3.2 Gen 1 (3.1 Gen 1) Type-C. Data transfer rate: 5000 Mbit/s, Product colour: Black, Grey, Housing material: Aluminium, Plastic. Input voltage: 5 V, Input current: 0.9 A. Width: 52.5 mm, Depth: 52.5 mm, Height: 14 mm. Quantity per pack: 1 pc(s), Package width: 236 mm, Package depth: 255 mm



Ports & interfaces		Weight & dimensions	
Host interface *	USB 3.2 Gen 1 (3.1 Gen 1) Type-A	Weight	281 g
Hub interfaces *	USB 3.2 Gen 1 (3.1 Gen 1) Type-A, USB 3.2 Gen 1 (3.1 Gen 1) Type-C	Packaging data	
USB 3.2 Gen 1 (3.1 Gen 1) Type-A ports quantity	2	Quantity per pack	1 pc(s)
USB 3.2 Gen 1 (3.1 Gen 1) Type-C ports quantity	2	Package width	236 mm
Ports quantity *	4	Package depth	255 mm
DC-in jack	✓	Package height	40 mm
		Package weight	300 g
		Package type	Polybag
Features		Operational conditions	
Data transfer rate *	5000 Mbit/s	Maximum operating temperature	45 °C
Product colour	Black, Grey	Operating temperature (T-T)	0 - 45 °C
Housing material	Aluminium, Plastic	Operating temperature (T-T)	32 - 113 °F
Cable length	5 m	Storage temperature (T-T)	-20 - 70 °C
		Operating relative humidity (H-H)	0 - 40%
Power		Sustainability	
Input voltage	5 V	Sustainability compliance	✓
Input current	0.9 A	Sustainability certificates	CE, Federal Communications Commission (FCC), REACH, RoHS, UKCA
Weight & dimensions		Technical details	
Width	52.5 mm	Compliance certificates	CE, Federal Communications Commission (FCC), REACH, RoHS, UKCA
Depth	52.5 mm		
Height	14 mm		

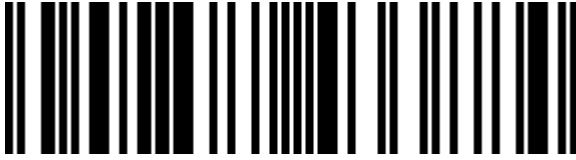

4002888433884

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.