



Lindy 10m USB 3.0 Hub 4 Ports

Brand : Lindy

Product code: 43389

Product name : 10m USB 3.0 Hub 4 Ports


- High performance hub with active cable that provides an extended 10m connection between a computer and up to 4 USB devices
- Connects 2 USB Type A and 2 Type C peripherals to a computer's USB Type A Port
- Supports the USB 3.2 / 3.1 Gen 1 / USB 3.0 SuperSpeed bandwidth for speeds of 5Gbps
- USB Bus powered, with DC socket for external power supply (not included)
- 2 year warranty

10m USB 3.0 Hub 4 Ports

Lindy 10m USB 3.0 Hub 4 Ports. Host interface: USB 3.2 Gen 1 (3.1 Gen 1) Type-A, Hub interfaces: USB 3.2 Gen 1 (3.1 Gen 1) Type-A, USB 3.2 Gen 1 (3.1 Gen 1) Type-C. Data transfer rate: 5000 Mbit/s, Product colour: Black, Grey, Housing material: Aluminium, Plastic. Input voltage: 5 V, Input current: 0.9 A. Width: 52.5 mm, Depth: 52.5 mm, Height: 14 mm. Quantity per pack: 1 pc(s), Package width: 236 mm, Package depth: 255 mm



| Ports & interfaces | | Weight & dimensions | |
|---|---|-----------------------------------|--|
| Host interface * | USB 3.2 Gen 1 (3.1 Gen 1) Type-A | Weight | 544 g |
| Hub interfaces * | USB 3.2 Gen 1 (3.1 Gen 1) Type-A, USB 3.2 Gen 1 (3.1 Gen 1) Type-C | Packaging data | |
| USB 3.2 Gen 1 (3.1 Gen 1) Type-A ports quantity | 2 | Quantity per pack | 1 pc(s) |
| USB 3.2 Gen 1 (3.1 Gen 1) Type-C ports quantity | 2 | Package width | 236 mm |
| Ports quantity * | 4 | Package depth | 255 mm |
| DC-in jack | ✓ | Package height | 60 mm |
| | | Package weight | 600 g |
| | | Package type | Polybag |
| Features | | Operational conditions | |
| Data transfer rate * | 5000 Mbit/s | Maximum operating temperature | 45 °C |
| Product colour | Black, Grey | Operating temperature (T-T) | 0 - 45 °C |
| Housing material | Aluminium, Plastic | Operating temperature (T-T) | 32 - 113 °F |
| Cable length | 10 m | Storage temperature (T-T) | -20 - 70 °C |
| | | Operating relative humidity (H-H) | 0 - 40% |
| Power | | Sustainability | |
| Input voltage | 5 V | Sustainability compliance | ✓ |
| Input current | 0.9 A | Sustainability certificates | CE, Federal Communications Commission (FCC), REACH, RoHS, UKCA |
| Weight & dimensions | | Technical details | |
| Width | 52.5 mm | Compliance certificates | CE, Federal Communications Commission (FCC), REACH, RoHS, UKCA |
| Depth | 52.5 mm | | |
| Height | 14 mm | | |

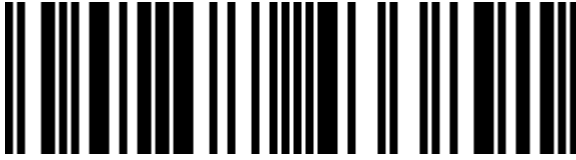

4002888433891

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.