SMART Board® **6000S (V3) Pro series with iQ**

SBID-6265S-V3-P and SBID-6065S-V3-PW
SBID-6275S-V3-P and SBID-6075S-V3-PW
SBID-6286S-V3-P and SBID-6086S-V3-PW

ENERGY STAR **HDMI** HIGH-DEFINITION MULTIMEDIA INTERFACE

DISPLAY

Screen sizes (diagonal)	65", 75", 86"
Backlight	LED
Aspect ratio	16:9
Maximum display resolution	4K UHD (3840 × 2160)
Refresh rate	60 Hz
Lifespan	≥ 50,000 hours
Brightness (maximum)	≥ 350 cd/m²
Response time	65": ≤ 9 ms
	75": ≤ 8 ms
	86": ≤ 8 ms
Viewing angle	178°
Glass	Fully heat-tempered anti-glare glass that resists smudges and fingerprints
Frame color	White or black
Convenience buttons	Power, home, volume, screen shade, freeze frame
Sensors	Proximity, ambient light, infrared, room temperature and humidity
Audio	2 integrated 20 W speakers
	Integrated linear four-microphone array
NFC	Integrated RFID NFC reader/writer

INTERACTIVE EXPERIENCE

Touch technology	HyPr Touch™ with InGlass™
Touch features	Tool Explorer™
	Simultaneous Tool Differentiation
	Object Awareness™
	Pen ID™
	Silktouch™
	Pressure Sensitive Ink
Typical response time	9 ms
Frame rate	150 Hz
Accuracy	±1 mm
Minimum object size	2 mm
Multitouch capabilities	Up to 40 touch points (OS dependent)
Tools included	Pens (×2)
	Erasers (×2)
Tool holders	Intelligent, magnetic, frame-mounted
Optional tools	Multicolor four-pen bundle

smarttech.com
smarttech.com/contact

SOFTWARE

iQ built-in Android™ experience	Included
SMART Meeting Pro® Room license	Included
SMART Meeting Pro Personal licenses (×10)	Included
SMART Ink® and SMART Product Drivers	Included
SMART Remote Management	Subscription for length of the included warranty

iQ BUILT-IN ANDROID EXPERIENCE

Operating system	Android version 9.0
Memory	6 GB DDR
Storage	32 GB
Digital whiteboard	✓
Web browser	✓
Screen sharing	✓
Other features	SMART Whiteboard
	Customizable home screen
	Live input preview
	File and app libraries
	Google Drive™ and OneDrive™ access
Object Awareness supported	✓
Ability to run third-party applications	✓
Cloud storage access	✓
NFC sign in to a SMART account	✓
Languages supported	Chinese (simplified), Chinese (traditional), Czech, Danish, Dutch, English, Estonian, Finnish, French, German, Greek, Hungarian, Italian, Japanese, Korean, Latvian, Lithuanian, Norwegian, Polish, Portuguese, Romanian, Russian, Slovak, Slovenian, Spanish, Swedish, Ukrainian, Vietnamese, Welsh
Updates	Automatic over-the-air (OTA)

PC COMPUTING

OPS support	✓
OPS-C support	✓
PC module power supported OPS	60 W
Optional computing modules	SMART OPS PC with Windows 10 Pro
	SMART Chromebox

INPUTS

	Front	Back
OPS PC accessory slot (60 W devices)	–	1
HDMI® 2.1 with HDCP 1.4 and HDCP 2.3 support	1	2
VGA video	–	1
Stereo 3.5 mm	–	1
RS-232	–	1
RJ45	–	2
USB Type-C 4K @ 60Hz, Display Port 1.2, USB 2.0 (UFP) for touch and digital audio, USB 2.0 (DFP) for peripherals; 65 W power delivery	1	–
USB Type-C, 4K @ 60Hz, Display Port 1.2, USB 2.0 (UFP) for touch and digital audio, USB 3.2 Gen 1 (DFP) for peripherals; 65W power delivery	–	1
USB 2.0 Type-A	–	1
USB 3.0 Type-A	1	2
USB 3.0 Type-B	–	3
USB 2.0 Type-B	1	–

OUTPUTS

	Front	Back
HDMI 2.1	–	1
Stereo 3.5 mm	–	1
S/PDIF	–	1

INCLUDED CABLES AND ACCESSORIES

	Qty
Country-specific power cable	1
USB cable	1
Pens (red and black)	2
Erasers	2
External dual-band 2.4 and 5 GHz antennae	3
Remote control	1
AAA batteries	2
WM-SBID-200 wall mount	1
SMART ID card (for NFC sign in)	2
Illustrated installation instructions	1
Important information document	1

CONNECTIVITY

Wired	RJ45 (×2) 1000baseT
Wi-Fi	IEEE 802.11 a/b/g/n/ac with 2 × 2 MIMO (both 2.4 and 5 GHz bands) supporting WEP, WPA, WPA2 PSK, and 802.1X EAP authentication protocols
Bluetooth	5.0 dual mode

STORAGE AND OPERATING REQUIREMENTS

Power requirements	100V to 240V AC, 50 Hz to 60 Hz
Operating temperature	41–95°F (5–35°C)
Storage temperature	-4–140°F (-20–60°C)
Humidity	5–80% relative humidity, non-condensing

POWER CONSUMPTION

Typical	65": 105 W
	75": 134 W
	86": 161 W
Standby	0.4 W

CERTIFICATION AND COMPLIANCE[*]

Regulatory models	IDS665-3, IDS675-3, and IDS686-3
US / Canada	UL, FCC, ISED, TSCA, CONEG Packaging, Proposition 65
Australia / New Zealand	RCM
Performance standards	ENERGY STAR®, HDMI

PURCHASING INFORMATION

ORDER NUMBERS

SBID-6265S-V3-P	SMART Board 6065S-V3 Pro interactive display with iQ
SBID-6275S-V3-P	SMART Board 6075S-V3 Pro interactive display with iQ
SBID-6286S-V3-P	SMART Board 6086S-V3 Pro interactive display with iQ
SBID-6265S-V3-PW	SMART Board® 6065S-V3 Pro interactive display with iQ - White
SBID-6275S-V3-PW	SMART Board 6075S-V3 Pro interactive display with iQ - White
SBID-6286S-V3-PW	SMART Board 6086S-V3 Pro interactive display with iQ - White
TS-4PEN-MC	Tool Explorer multicolor 4-pen bundle (orange, purple, green, blue) with magnetic penwell
TW-SW-1	SMART TeamWorks™ Room perpetual software includes 1 year maintenance
TW-SW-3	SMART TeamWorks Room perpetual software includes 3 year maintenance
TW-SW-5	SMART TeamWorks Room perpetual software includes 5 year maintenance

OPTIONAL ACCESSORIES

See smarttech.com/accessories

WARRANTY

SMART Assure warranty	Includes advanced hardware replacement and access to onsite support. Terms and conditions vary by region. Contact your local reseller or distributor for information and visit smarttech.com/warranty.

---

[*]Product availability may vary by region.

This product has received additional certifications not listed here.

CABLE REQUIREMENTS

HDMI	Certified premium high speed HDMI (18 Gbps)
	Maximum length: 23' (7 m)
USB 2.0	USB 2.0 certified
	Hi-Speed (480 Mbps) support
	Maximum length: 16' (5 m)
USB 3.0	USB 3.0 certified
	SuperSpeed (5 Gbps) support
	Maximum length: 9' (3 m)
USB Type-C	USB 3.2 Gen 1 certified
	SuperSpeed (5 Gbps) support
	Maximum length: 6' (2 m)
More information	
	See smarttech.com/kb/171414

INSTALLATION, DIMENSIONS, AND WEIGHTS

NOTES

- All dimensions ± 1/8" (0.3 cm). All weights ± 2 lb. (0.9 kg).
- Product ships upright.
- Leave space around the display to ensure adequate ventilation. See the *SMART Board 6000S and 6000S Pro installation and maintenance guide* (smarttech.com/kb/171414) for the specific space requirements.

SBID-6265S-V3-P/SBID-6265S-V3-PW

Dimensions
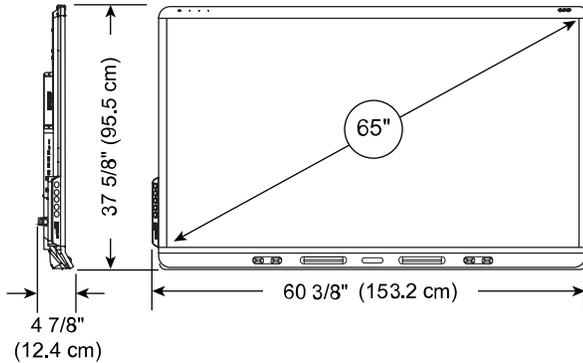
Weight

112 lb. (51 kg)

Shipping dimensions (including pallet)

67 1/8" × 46 1/2" × 10 3/8"
(170.4 cm × 118.1 cm × 26.4 cm)

Shipping weight

159 lb. (72 kg)

VESA mount
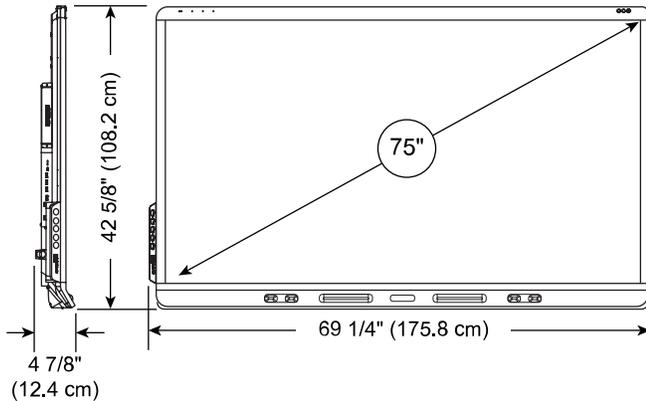
M8, 600 × 400 mm

Handles

2

SBID-6275S-V3-P/SBID-6275S-V3-PW

Dimensions

Weight

143 lb. (65 kg)

Shipping dimensions (including pallet)

76" × 51 1/2" × 10 3/8"
(193.1 cm × 130.8 cm × 26.4 cm)
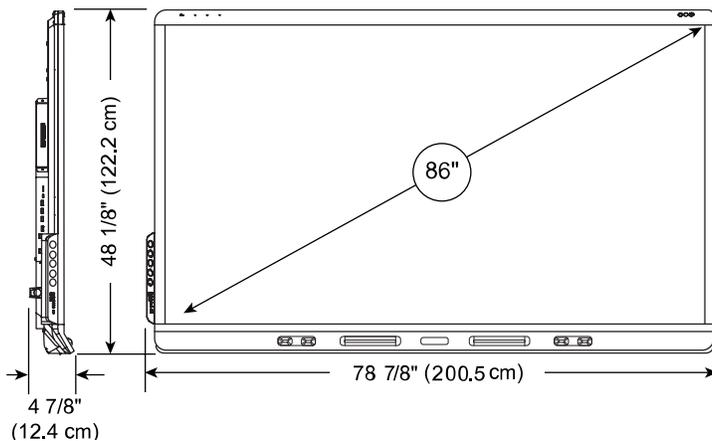
Shipping weight

194 lb. (88 kg)

VESA mount

M8, 600 × 400 mm

Handles

2

SBID-6286S-V3-P/SBID-6286S-V3-PW

Dimensions

Weight

185 lb. (84 kg)

Shipping dimensions (including pallet)

86" × 57" × 10 3/8"
(218.6 cm × 144.7 cm × 26.4 cm)

Shipping weight

243 lb. (110 kg)

VESA mount

M8, 600 × 400 mm

Handles

2