



APC Smart-UPS uninterruptible power supply (UPS) Line-Interactive 5 kVA 4000 W 10 AC outlet(s)

Brand : APC

Product code: SUA5000RMI5U

Product name : Smart-UPS

Smart-UPS 5000VA 230V Rackmount/Tower

APC Smart-UPS uninterruptible power supply (UPS) Line-Interactive 5 kVA 4000 W 10 AC outlet(s):

APC Smart-UPS, 4000 Watts / 5000 VA, Input 230V / Output 230V, Rack Height 5 U

Includes: CD with software, Documentation CD, Installation guide, Rack mounting hardware, Rack Mounting support rails, Smart UPS signalling RS-232 cable, User Manual, Web/SNMP Management Card


Standard Lead Time: Usually Ships within 4 Weeks

- Adjustable voltage-transfer points.
- Audible alarms.
- Automatic self-test.
- Boost and Trim Automatic Voltage Regulation (AVR).
- Cold-start capable.
- Disconnected battery notification.
- Hot-swappable batteries.
- LED status indicators.
- Network manageable.
- Plug-and-Play installation.
- Rack/Tower convertible.
- Resettable circuit breakers.
- Safety-agency approved
- Serial Connectivity.
- SmartSlot.
- Temperature-compensated battery charging.



Features		Design	
UPS topology *	Line-Interactive	Form factor *	Rackmount/Tower
Output power capacity *	5 kVA	Rack capacity	5U
Output power *	4000 W	Product colour *	Black
Waveform *	Sine	LED indicators	Battery replacement
Input operation voltage (min) *	151 V	Certification	C-tick, CE, EN 50091-1, EN 50091-2, GOST, GS Mark, VDE, REACH, PEP, EOLI
Input operation voltage (max) *	302 V	Operational conditions	
Input frequency *	50/60 Hz	Operating temperature (T-T)	0 - 40 °C
Output operation voltage (min)	220 V	Storage temperature (T-T)	-15 - 45 °C
Output operation voltage (max)	240 V	Operating relative humidity (H-H)	0 - 95%
Output frequency regulation	47 - 53 Hz	Storage relative humidity (H-H)	0 - 95%
Automatic Voltage Regulation (AVR)	✓	Operating altitude	0 - 9000 m
Surge energy rating	480 J	Non-operating altitude	0 - 15000 m
Hold time (min)	2 ms	Technical details	
Hold time (max)	4 ms	Sustainability certificates	RoHS
Number of output phases	1	Weight & dimensions	
Efficiency	96%	Width	483 mm
Noise level	53 dB	Depth	660 mm
Surge protection	✓	Height	222 mm
Audible alarm(s)	✓	Weight	97.7 kg
Auto-restart	✓	Package width	610 mm
Ports & interfaces		Package depth	762 mm
AC outlet types	C13 coupler, C19 coupler	Package height	635 mm
Power plug	Hard Wire 3-wire	Package weight	106.8 kg
AC outlets quantity	10 AC outlet(s)		
Number of output IEC jumpers	4		

Battery		Packaging data	
Battery technology	Sealed Lead Acid (VRLA)	Rack mount kit	✓
Battery capacity	1632 VAh	Cables included	RS-232
Typical backup time at full load	9.4 min	Manual	✓
Typical backup time at half load	26.7 min	Quick installation guide	✓
Battery life (max)	5 year(s)	Software CD	✓
Battery recharge time	3 h	Logistics data	
Hot-swap battery	✓	Products per pallet	4 pc(s)
Automatic battery test	✓	Harmonized System (HS) code	85078000
Cold start	✓	Products per master (outer) case	1 pc(s)
		Other features	
		Nominal output voltage	230 V
		Nominal input voltage	230 V
		Packaging content	Web/SNMP Management Card

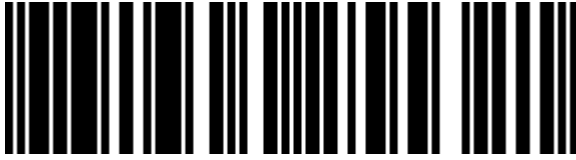

0731304255321



731304255321

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.