



## DELL P Series P2425HE computer monitor 61 cm (24") 1920 x 1080 pixels Full HD LCD Black

**Brand :** DELL

**Product family:** P Series

**Product code:** P2425HE


**Product name :** P2425HE

DELL P Series P2425HE. Display diagonal: 61 cm (24"), Display resolution: 1920 x 1080 pixels, HD type: Full HD, Display technology: LCD, Response time: 8 ms, Native aspect ratio: 16:9, Viewing angle, horizontal: 178°, Viewing angle, vertical: 178°. Built-in USB hub, USB hub version: 3.2 Gen 1 (3.1 Gen 1). VESA mounting, Height adjustment. Product colour: Black



Display		Ergonomics	
Display diagonal *	61 cm (24")	VESA mounting *	✓
Display resolution *	1920 x 1080 pixels	Panel mounting interface	100 x 100 mm
HD type *	Full HD	Cable management	✓
Native aspect ratio *	16:9	Cable lock slot *	✓
Display technology *	LCD	Cable lock slot type	Kensington
Panel type *	IPS	Height adjustment *	✓
LED backlight	✓	Height adjustment	15 cm
Backlight type	LED	Pivot	✓
Touchscreen *	✗	Pivot angle	-90 - 90°
Display brightness (typical)	250 cd/m <sup>2</sup>	Swivelling	✓
Response time	8 ms	Swivel angle range	-45 - 45°
Anti-glare screen	✓	Tilt adjustment	✓
Screen shape *	Flat	Tilt angle range	-5 - 21°
Supported graphics resolutions	640 x 480 (VGA), 720 x 400, 800 x 600 (SVGA), 1024 x 768 (XGA), 1152 x 864 (XGA+), 1280 x 1024 (SXGA), 1280 x 720 (HD 720), 1600 x 900, 1920 x 1080 (HD 1080)	On Screen Display (OSD)	✓
		Plug and Play	✓
		LED indicators	✓
		<b>Power</b>	
Supported video modes	480p, 576p, 720p, 1080p	Energy efficiency class (SDR) *	D
Contrast ratio (typical) *	1500:1	Energy efficiency class (HDR) *	Not available
Maximum refresh rate *	100 Hz	Energy consumption (SDR) per 1000 hours *	14 kWh
Viewing angle, horizontal	178°	Power consumption (typical) *	13.9 W
Viewing angle, vertical	178°	Power consumption (standby) *	0.3 W
Display number of colours *	16.7 million colours	Power consumption (max)	180 W
Response time (fast)	5 ms	Power consumption (off)	0.3 W
Pixel pitch	0.2745 x 0.2745 mm	AC input voltage	100 - 240 V
Pixel density	92.53 ppi	AC input frequency	50/60 Hz
Horizontal scan range	30 - 110 kHz	Input current	2 A
Vertical scan range	48 - 100 Hz	Power supply type	Internal
Viewable size, horizontal	52.7 cm		

<b>Display</b>		<b>Power</b>	
Viewable size, vertical	29.6 cm	Energy efficiency scale	A to G
Viewable size diagonal	60.5 cm	<b>Operational conditions</b>	
Surface hardness	3H	Operating temperature (T-T)	0 - 40 °C
sRGB coverage (typical)	99%	Storage temperature (T-T)	-20 - 60 °C
Dell ComfortView technology	✓	Operating relative humidity (H-H)	10 - 80%
<b>Performance</b>		Storage relative humidity (H-H)	5 - 90%
NVIDIA G-SYNC *	✗	Operating altitude	0 - 5000 m
AMD FreeSync *	✗	Non-operating altitude	0 - 12192 m
Flicker-free technology	✓	<b>Packaging content</b>	
Low Blue Light technology	✓	Stand included	✓
Windows operating systems supported	Windows 10, Yes	Cables included	AC, DisplayPort, USB Type-C
Mac operating systems supported	MacOS	Quick start guide	✓
<b>Multimedia</b>		DisplayPort cable length	1.8 m
Built-in speaker(s) *	✗	<b>Weight &amp; dimensions</b>	
Built-in camera *	✗	Width (with stand)	538.6 mm
<b>Design</b>		Depth (with stand)	181.8 mm
Product colour *	Black	Height (with stand)	364 mm
Front bezel colour	Black	Weight (with stand)	5.18 kg
Feet colour	Grey	Width (without stand)	538.6 mm
<b>Ports &amp; interfaces</b>		Depth (without stand)	50 mm
Built-in USB hub *	✓	Height (without stand)	314.2 mm
USB hub version	3.2 Gen 1 (3.1 Gen 1)	Weight (without stand)	3.69 kg
Number of USB Type-C upstream ports quantity	1	Bezel width (side)	5.8 mm
USB Type-A downstream ports quantity	3	Bezel width (top)	5.8 mm
USB Type-C downstream ports quantity	1	Bezel width (bottom)	1.2 cm
USB Type-C DisplayPort Alternate Mode	✓	<b>Packaging data</b>	
USB Power Delivery	✓	Package weight	7.24 kg
USB Power Delivery up to	90 W	USB cable length	1 m
HDMI *	✓	<b>Sustainability</b>	
HDMI ports quantity	1	Sustainability compliance	✓
HDMI version	1.4	Sustainability certificates	TCO, TÜV mark, ENERGY STAR, RoHS
DisplayPorts quantity	2	Doesn't contain	Arsenic, Mercury, PVC/BFR
DisplayPort version	1.4	<b>Brand-specific features</b>	
Headphone out *	✗	Dell Display Manager (DDM) compatibility	✓
HDCP	✓	<b>Other features</b>	
HDCP version	1.4	RJ-45 ports quantity	1
AC (power) in	✓		

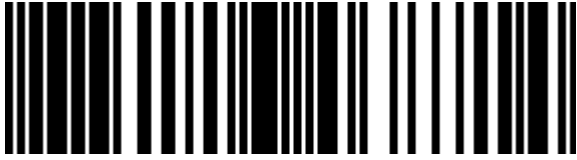

0884116468714



884116468714

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.