

## ASUS ROG THOR 1000P2-GAMING power supply unit 1000 W 20+4 pin ATX ATX Black, Silver

**Brand :** ASUS

**Product family:** ROG

**Product code:** 90YE00L4-B0NA00


**Product name :** THOR 1000P2-GAMING



- Lambda A++ Certification confirms the latest Thor wields menacing power in absolute stealth
  - ROG heatsinks cover critical components, delivering lower temperatures and reduced noise
  - A 135mm Axial-tech fan with PWM control delivers lower noise and keeps thermals in check
  - Built with low-ESR capacitors and other premium components to achieve 80 Plus Platinum Certification
  - OLED display monitors power draw in real time
  - Aura Sync compatibility lets you customize and sync lighting effects with other compatible hardware
- ROG Thor 1000W Platinum II , 80Plus Platinum, OPP/OVP/UVP/SCP/OCF/OTP, 100-240Vac, ROG Thermal Solution, +3.3V +5V +12V -12V +5Vsb, 25A 25A 83A 0.3A 3A, 125W 125W 996W 3.6W 15W, 2.37KG, ARGB, 0dB Fan



<b>Power</b>		<b>Ports &amp; interfaces</b>	
Total power *	1000 W	CPU power connector (4+4 pin)	✓
AC input voltage *	100 - 240 V	PCI Express connector	✓
Maximum input current (@220V)	83 A	Cabling type	Fully-Modular
Combined power (+3.3V)	125 W	<b>Performance</b>	
Combined power (+12V)	996 W	80 PLUS certification *	80 PLUS Platinum
Combined power (+5V)	125 W	Purpose *	PC
Combined power (-12V)	3.6 W	Power supply unit (PSU) form factor *	ATX
Combined power (+5Vsb)	15 W	Silent mode	✓
Max output current (+3.3V)	25 A	Certification	ROHS
Max output current (+12V)	83 A	<b>Design</b>	
Max output current (+5V)	125 A	Product colour	Black, Silver
Max output current (-12V)	0.3 A	Cooling type	Active
Max output current (+5Vsb)	3 A	Illumination	✓
Power protection features	Over current, Over power, Over voltage, Overdischarge, Short circuit, Under voltage	LED indicators	✓
<b>Ports &amp; interfaces</b>		<b>Packaging content</b>	
Motherboard power connector *	20+4 pin ATX	Cables included	CPU, DC, PCIe, Peripheral (Molex), SATA
Number of SATA power connectors	12	Cable tie(s) included	✓
Peripheral (Molex) power connectors (4-pin) *	6	<b>Weight &amp; dimensions</b>	
PCI Express power connectors (6+2 pin)	8	Width	190 mm
PCI Express power connectors (8-pin)	1	Depth	150 mm
CPU P4 connector (4-pin)	2	Height	86 mm
		Weight	2.37 kg
		<b>Technical details</b>	
		Sustainability certificates	RoHS

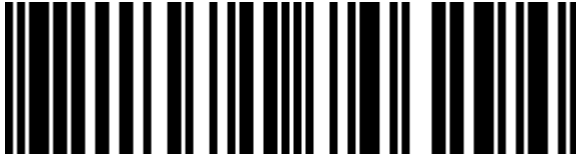

4711081746294

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 07-JUN-2024. Prints or copies of Information are only valid on the printed Publication date