PHILIPS

Philips 75BDL4511D/00 Signage Display Digital A-board 190.5 cm (75") 500 cd/m² 4K Ultra HD Black 24/7

Brand : Philips

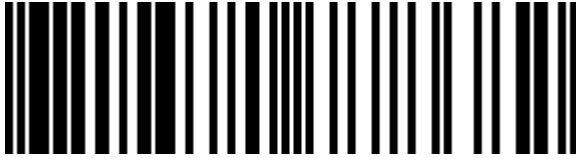**Product code:** 75BDL4511D/00

Product name : 75BDL4511D/00

75'' 4K UHD 3840 x 2160 ADS, 500cd/m², 1.07 Billion, 16:9, Response 8ms,DisplayPort, DVI-I, HDMI, USB, RJ45,RS232C, OPS, 24/7
Philips 75BDL4511D/00. Product design: Digital A-board. Display diagonal: 190.5 cm (75"), Display resolution: 3840 x 2160 pixels, Display brightness: 500 cd/m², HD type: 4K Ultra HD. Operating hours (hours/days): 24/7. Product colour: Black

Display

Display diagonal *	190.5 cm (75")
Display resolution *	3840 x 2160 pixels
Display brightness *	500 cd/m²
HD type *	4K Ultra HD
Touchscreen *	✘
Native aspect ratio	16:9
Response time	8 ms
Contrast ratio (typical)	1200:1
Contrast ratio (dynamic)	500000:1
Viewing angle, horizontal	178°
Viewing angle, vertical	178°
Display number of colours	1.07 billion colours
Pixel pitch	0.4296 x 0.4296 mm
Display diagonal (metric)	189.3 cm
Panel life	50000 h
Haze rate	25%

Ports & interfaces

HDMI ports quantity *	4
HDMI version	2.0
HDMI input ports quantity	3
HDMI output ports quantity	1
DVI port *	✔
DVI-I ports quantity	1
DisplayPorts quantity *	2
DisplayPorts in	1
DisplayPorts out	1
USB port *	✔
USB ports quantity	2
USB version	2.0

Design

VESA mounting *	✔
Panel mounting interface	400 x 400 mm
Bezel width (bottom)	1.49 cm
Bezel width (side)	1.49 cm
Bezel width (top)	1.49 cm
Mounting type	Wall

Performance

Purpose *	Commercial
On Screen Display (OSD)	✔
On Screen Display (OSD) languages	Arabic, Simplified Chinese, Traditional Chinese, Danish, Dutch, English, Finnish, French, Italian, Japanese, Norwegian, Polish, Portuguese, Russian, Swedish, Turkish
Operating hours (hours/days)	24/7

Power

Power consumption (typical) *	185 W
Power consumption (standby) *	0.5 W
Energy efficiency class (SDR)	G
Energy consumption (SDR) per 1000 hours	204 kWh
AC input voltage	100 - 240 V
AC input frequency	50 - 60 Hz
Energy efficiency scale	A to G

Computer system

Video formats supported	H.263, H.264, H.265, MPEG
Audio formats supported	AAC, HE-AAC
Image formats supported	BMP, JPEG, PNG

Ports & interfaces

Ethernet LAN *	✔
Ethernet LAN (RJ-45) ports	1
Audio (L/R) in	1
Audio (L/R) out	1
RS-232C	✔
Remote (IR) input	1
Remote (IR) output	1
OPS module slot	✔

Audio

Built-in speaker(s) *	✔
Number of built-in speakers	2
RMS rated power	20 W

Design

Product design *	Digital A-board
Placement supported *	Indoor
Orientation	Horizontal/Vertical
Product colour *	Black

Weight & dimensions

Display width	1683.5 mm
Display depth	69.5 mm
Display height	961.7 mm
Display weight	35.9 kg

Packaging content

Remote control included	✔
Batteries included	✔
Cables included	AC, IR sensor, RS-232

Operational conditions

Operating temperature (T-T)	0 - 40 °C
Operating relative humidity (H-H)	20 - 80%
Storage temperature (T-T)	-20 - 60 °C
Storage relative humidity (H-H)	5 - 95%

Logistics data

Harmonized System (HS) code	85285210

Technical details

Sustainability certificates	ENERGY STAR
Compliance certificates	RoHS

8712581778682