

## 1-Port Gigabit PoE+ Extender - 802.3at and 802.3af - 100 m (330 ft)

StarTech ID: POEEXT1GAT



This Gigabit PoE+ extender spans your Power over Ethernet (PoE) device over longer distances, letting you double the 100m limitations of a traditional PoE infrastructure.



Now you can connect your Gigabit PoE device up to a maximum of 200m away, so it's easy to install a remote IP camera or access point. Plus the extender can be daisy-chained for more scalability.

### Unrestricted PoE+ range and convenience


Need more distance? This convenient PoE+ repeater maximizes range and flexibility by extending your PoE connection by an extra 100m (330ft), while providing 24-watt power output to compatible devices.

Simply connect the extender to your power sourcing equipment (PSE) and your PoE-powered device (PD) and you're all set. The extender is compliant with the 802.3at/af standard, so it will work with existing PSE, such as a StarTech.com [PoE+ injector](#) (POEINJ1G) or [PoE+ switch](#) (IES81000POE).

### Daisy chain for longer distance and flexibility

Still need more distance? If an extra 100m isn't enough, this full-featured PoE extender offers daisy chain capability.

You can easily connect four extenders together, letting you install your PoE+ PD up to 500m (1640ft) away. It's perfect for business, education, and retail environments (output wattage is dependent on the number of daisy-chained extenders used).

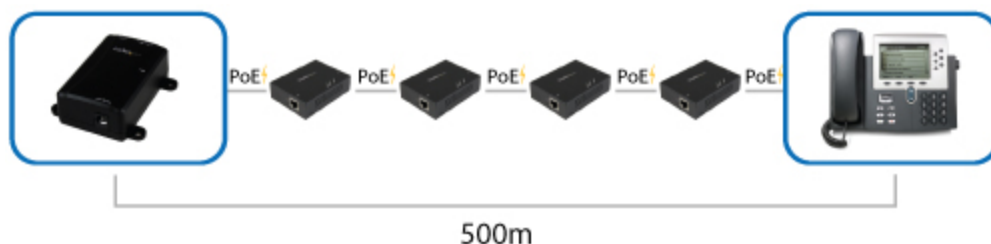

## Convenient installation options and durable construction

Get up and running quickly. This Gigabit PoE+ extender can be positioned right where you need it, with a wall-mountable design that requires no external power adapter.

You can enjoy reliable performance with little worry of downtime or failure, the extender features a rugged metal housing with built-in ESD and surge protection.

The POEEXT1GAT is backed by a StarTech.com 2-year warranty and free lifetime technical support.

### Applications

- Ideal for Wi-Fi® access points, IP phones, surveillance cameras, and kiosks where a power connection is not available
- Enable remote installation of PoE+ devices over longer distance than conventional PoE range capabilities
- Perfect for SOHO, SMB, system integrators, and IT administrators

## Features

- Deploy and access your Gigabit PoE-powered devices (PD) further away
- Extend your PoE PDs over longer distances by daisy-chaining four extenders up to 500m (1640ft) total range (reduced power output at each connection)
- Compact, wall-mountable, and rugged metal housing for convenience and reliability
- 2kV ESD and surge protection
- Plug-and-play setup with no power adapter required
- IEEE 802.3at 30W input to IEEE 802.3at/af 24W output
- 52V to 56V output voltage
- Automatically detects your connected PD to prevent damage if incorrectly installed

Technical Specifications

Warranty	2 Years
Industry Standards	IEEE 802.3af PoE, IEEE 802.3at PoE+
Industry Standards	IEEE 802.3 10BASE-T, IEEE 802.3u 100BASE-TX, IEEE 802.3ab 1000BASE-T
Ports	1
Auto MDIX	Yes
Auto-Negotiation	Yes
Compatible Networks	10/100/1000 Mbps
Flow Control	Half-duplex back-pressure IEEE 802.3x pause frame for full-duplex
Full Duplex Support	Yes
Jumbo Frame Support	No
Maximum Cable Length	328 ft [100 m]
Maximum Data Transfer Rate	2 Gbps (Full-Duplex)
MTBF	50,000 Hours
Power Output	One extender - 24W Power Output: Two extender daisy chain - 20W Power Output: Three extender daisy chain - 16W Power Output: Four extender daisy chain - 12W
Surge Protection	EN61000-4-2 (ESD) - 2kV EN61000-4-5 (Surge) - 2kV
Switching Architecture	Store-and-Forward
Connector Type(s)	2 - RJ-45 Female
<b>Note</b>	Total extension distances can often be shorter due to power delivery voltage-drop on the connected cables. Maximum distances can vary based on the quality of the UTP cables and the environment.
<b>Note</b>	You may daisy chain up to 4 POEEXT1GAT units total, for a maximum of 500m. The 4th unit will supply IEEE 802.3af up to 12W output.

Patents and Licenses	<p>The following patents are licensed for this product. This list might not be all inclusive.</p> <ul style="list-style-type: none"><li>• United States Patent No. 5,406,260 (expired)</li><li>• United States Patent No. 6,650,622</li><li>• United States Patent No. 7,457,250</li><li>• United States Patent No. 8,155,012</li><li>• United States Patent No. 8,902,760</li><li>• United States Patent No. 8,942,107</li><li>• United States Patent No. 9,019,838</li><li>• United States Patent No. 9,049,019</li><li>• United States Patent Application No. 14/695,456</li><li>• United States Patent Application No. 14/726,940</li></ul>
System and Cable Requirements	<p>If your connected device does not meet the IEEE 802.3af or IEEE 802.3at PoE standard, then the POEEXT1GAT will not pass-through power to the connected device / Ethernet cable.</p>
LED Indicators	1 - PoE IN
LED Indicators	1 - LNK/ACT
LED Indicators	1 - PoE OUT
Output Voltage	52 ~ 56 DC
Power Consumption	3.2 W Max
Power Source	PoE-Powered
Humidity	5~95% RH (Non-Condensing)
Operating Temperature	0°C to 50°C (32°F to 122°F)
Storage Temperature	-10°C to 85°C (14°F to 185°F)
Color	Black
Enclosure Type	Steel
Product Height	1 in [25 mm]
Product Length	3.7 in [94 mm]
Product Weight	6.6 oz [188 g]
Product Width	2.7 in [69 mm]
Shipping (Package) Weight	12 oz [339 g]
Included in Package	1 - Gigabit Power over Ethernet extender
Included in Package	1 - instruction manual

Certifications, Reports and Compatibility

