


### Open Frame Touch Monitor

#### HO 105 HTB

25,65 cm / 10.1" Diagonal  
LED Backlight – Format 16:10

- 1280 x 800 Resolution
- 10-Point Touch P-Cap Technology
- 170° / 170° Wide Viewing Angle
- Dual Input: HDMI + VGA
- IP65 (front) Rating Level
- 12 Volt External Power Supply
- ≥6H Toughened Hard Panel Surface
- TP Module Thickness 2mm
- Touch-Through Glass (available upon request\*)
- Sturdy Metal Case
- VESA Mount and Multiple Mounting Options
- Edge to Edge glass without raised frame
- Orientation: Landscape, Portrait, Face-Up



25,65 cm / 10.1"

Part. No.: HO 105 HTB

#### SIZE, RESOLUTION



10.1"  
16:10 Aspect Ratio



1280 x 800

#### CONNECTIVITY, IP LEVEL



HDMI  
VGA



IP 65  
Water & Dust  
Protection

#### VIEWING ANGLE, BRIGHTNESS



170° Wide  
Viewing Angle



350cd/m<sup>2</sup> Panel  
Brightness

#### OTHER FEATURES





10 Points  
Touch



Touch to  
USB Link

Display Size	25,65 cm / 10.1" Diagonal
Panel Type	TFT – LED Backlight, IPS Panel (*)
Aspect Ratio	16:10
Resolution (H x V)	1280 x 800
Brightness	350 cd/m <sup>2</sup> (Panel) / 300 cd/m <sup>2</sup> (Monitor)
Contrast (Typ.)	800:1 (Typical)
Viewing Angle L/R; U/D	170° H / 170° V (CR >10)
Response Time	25 msec (Typ.)
Pixel Pitch	0,1695 (H) x 0,1695 (V) mm
Touch Type	Projected Capacitive Type – 10-Point Touch Material Glass + Glass (G+G)
Display Colors	16,7M Colors
Display Protection	Thickness 2 mm
Hardness / Transmittance	≥6H Toughened hard panel surface / ≥85%
IP Rating Level	IP 65 (Front), Water and Dust Protection **
Horizontal Frequency	30 ~ 55 kHz
Vertical Frequency	56 ~ 60 Hz
External Power Adapter	DC: 12Volt / 3A
Input 1	VGA (D-Sub)
Input 2	HDMI
Input 3	USB Type B (for Touch function)
Speakers	-
Power Consumption	On: 5W; Stand-by: 0,2W; Off: 0,2W
Product Dimensions	260 x 35,8 x 178 mm (W x D x H)
Packing Dimensions	370 x 90 x 237 mm (W x D x H)
Net / Gross Weight	1,4 Kg / 2,2 Kg

VESA Mounting	75 x 75 mm. Screws: M4, 4mm (Max), pitch 0,7 mm
Controls	Power, Auto, (+), (-), Menu
Color	9300, 7500, 6500, User Mode
Preset Mode	N/A
On Screen Display	9 OSD Languages
LED Backlight life	20000 hours
Accessory	Power Adaptor; EU Power Cord (1,8m); USB 2.0 (B-A) Cable (1,8m); HDMI Cable (2m)
Orientation	Landscape, Portrait, Face-Up

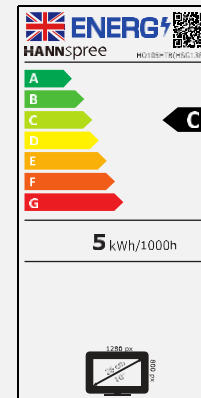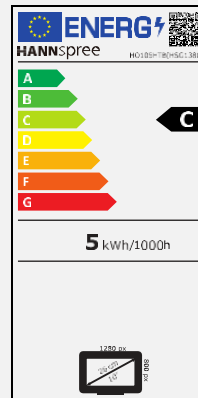

Supplier's Name	HANNspree
Model Name	HO105HTB
Energy efficiency class for standard Dynamic Range (SDR)	C
Annual Energy Power Consumption (kWh/1000h)	5 kWh/1000h
On mode power demand for Standard Dynamic Range (SDR)	5 W
Off mode power demand (W)	0,2 W
Standby mode power demand (W)	0,2 W
Screen Diagonal (cm / inches)	25,65cm/10.1"
Resolution	1280 x 800

PART. NO.:  
HO105HTB


4 711404 023170 >

© 2021 HANNspree Europe Holdings B.V. Specifications and design as well as accessories are subject to change without notice. Screen shots are simulated. Actual products may differ slightly from those illustrated on this promotion material. Please refer to actual samples for final selection. The products displayed on this promotion material may not be available for purchase in your particular country or locality. Please check with your local HANNspree authorized representatives for the availability of specific products in your area. All brand, product, Service names and logos are trademarks and/or registered trademarks of their respective manufactures and Companies.

\*\* IP65: The IP Code classifies how resistant a device is to foreign objects and moisture. IP65 means that the monitor is protected from total dust ingress and it is protected against low pressure water jets from any direction. Limited ingress permitted.

\* "IPS" word mark / trademark and related patents on technologies belong to their respective owners.

## HO 105 HTB 10.1" Open Frame Touch Monitor

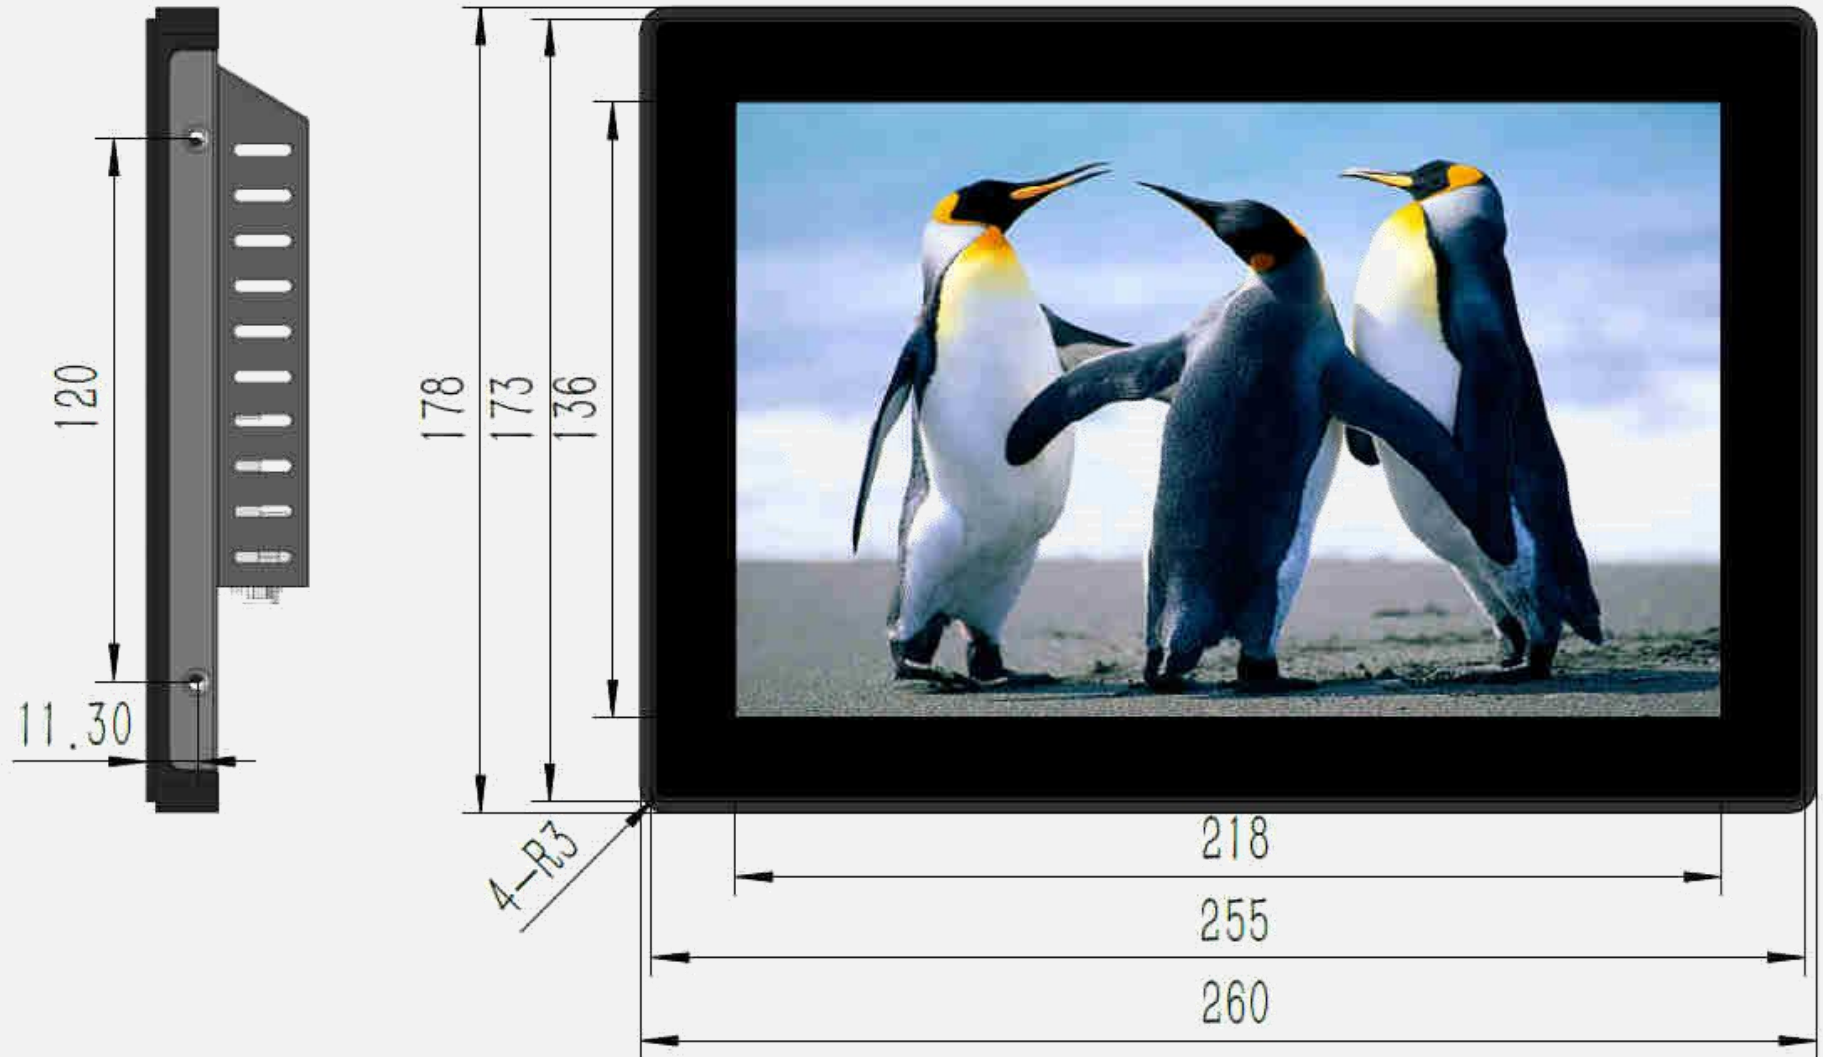

## HO 105 HTB 10.1" Open Frame Touch Monitor

