

## StarTech.com USB 3.0 to Gigabit Ethernet NIC Network Adapter with 3 Port Hub - White

**Brand :** StarTech.com

**Product code:** ST3300U3S

**Product name :** USB 3.0 to Gigabit Ethernet NIC Network Adapter with 3 Port Hub - White



StarTech.com USB 3.0 to Gigabit Ethernet NIC Network Adapter with 3 Port Hub - White - USB 3 Ethernet Adapter - USB Charging Hub

StarTech.com USB 3.0 to Gigabit Ethernet NIC Network Adapter with 3 Port Hub - White. Connectivity technology: Wired, Host interface: USB. Maximum data transfer rate: 5000 Mbit/s. Product colour: Black, White

<b>Ports &amp; interfaces</b>		<b>Operational conditions</b>	
Connectivity technology *	Wired	Operating relative humidity (H-H)	5 - 85%
Host interface *	USB	<b>Sustainability</b>	
Ethernet LAN (RJ-45) ports	1	Sustainability compliance	✓
USB version	3.2 Gen 1 (3.1 Gen 1)	Sustainability certificates	CE, RoHS
<b>Network</b>		<b>Weight &amp; dimensions</b>	
Maximum data transfer rate *	5000 Mbit/s	Width	65 mm
Networking standards *	IEEE 802.3, IEEE 802.3ab, IEEE 802.3az, IEEE 802.3u	Depth	92 mm
Ethernet LAN	✓	Height	20 mm
Ethernet LAN data rates	10,100,1000 Mbit/s	Weight	65 g
Cabling technology	10/100/1000BaseT(X)	<b>Packaging data</b>	
Wi-Fi	✗	Quantity	1
Wake-on-LAN ready	✓	Drivers included	✓
Auto MDIX IEEE	✓	Package width	162 mm
Full duplex	✓	Package depth	165 mm
Jumbo frames support	✓	Package height	53 mm
<b>Design</b>		Package weight	344 g
Product colour	Black, White	<b>Packaging content</b>	
Internal *	✗	Cables included	USB
Chipset	ASIX AX88179 + VIA VL811	Manual	✓
Hot-swap	✓	<b>Technical details</b>	
Plug and Play	✓	Compliance certificates	CE, RoHS
LED indicators	Activity, Link, Power	<b>Logistics data</b>	
		Harmonized System (HS) code	85176990
		Master (outer) case width	332 mm
		Master (outer) case length	537 mm
		Master (outer) case height	329 mm
		Products per master (outer) case	40 pc(s)
		<b>Other features</b>	
		Connection to PC	✓


System requirements		Other features	
Windows operating systems supported	Windows 10 Education, Windows 10 Education x64, Windows 10 Enterprise, Windows 10 Enterprise x64, Windows 10 Home, Windows 10 Home x64, Windows 10 IOT Core, Windows 10 Pro, Windows 10 Pro x64, Windows 10 x64, Windows 11, Windows 11 x64, Windows 7, Windows 7 Enterprise, Windows 7 Enterprise x64, Windows 7 Home Basic, Windows 7 Home Basic x64, Windows 7 Home Premium, Windows 7 Home Premium x64, Windows 7 Professional, Windows 7 Professional x64, Windows 7 Starter, Windows 7 Starter x64, Windows 7 Ultimate, Windows 7 Ultimate x64, Windows 7 x64, Windows 8, Windows 8 Enterprise, Windows 8 Enterprise x64, Windows 8 Pro, Windows 8 Pro x64, Windows 8 x64, Windows 8.1, Windows 8.1 Enterprise, Windows 8.1 Enterprise x64, Windows 8.1 Pro, Windows 8.1 Pro x64, Windows 8.1 x64, Windows Vista Business, Windows Vista Business x64, Windows Vista Enterprise, Windows Vista Enterprise x64, Windows Vista Home Basic, Windows Vista Home Basic x64, Windows Vista Home Premium, Windows Vista Home Premium x64, Windows Vista Ultimate, Windows Vista Ultimate x64, Windows Vista x64, Windows XP, Windows XP Home, Windows XP Home x64, Windows XP Professional, Windows XP Professional x64	AC input voltage	115-230 V
Mac operating systems supported	Mac OS X 10.10 Yosemite, Mac OS X 10.11 El Capitan, Mac OS X 10.12 Sierra, Mac OS X 10.13 High Sierra, Mac OS X 10.14 Mojave, Mac OS X 10.6 Snow Leopard, Mac OS X 10.7 Lion, Mac OS X 10.8 Mountain Lion, Mac OS X 10.9 Mavericks, Mac OS X 11.0 Big Sur, Mac OS X 12.0 Monterey, Mac OS X 13.0 Ventura	Ports quantity	3
Linux operating systems supported	✓	Data transfer rate	5000 Mbit/s
Server operating systems supported	Windows Server 2003, Windows Server 2008 R2, Windows Server 2012, Windows Server 2012 R2, Windows Server 2016, Windows Server 2019		
Operational conditions			
Operating temperature (T-T)	0 - 50 °C		
Storage temperature (T-T)	-20 - 60 °C		



0065030849777



065030849777

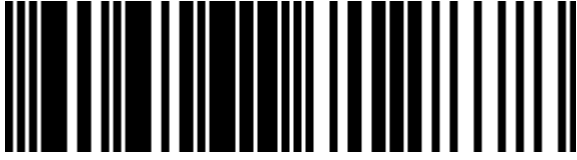

0616268712878



616268712878

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.