


ZYXEL

Zyxel GS1915-8EP Managed L2 Gigabit Ethernet (10/100/1000) Power over Ethernet (PoE) Black

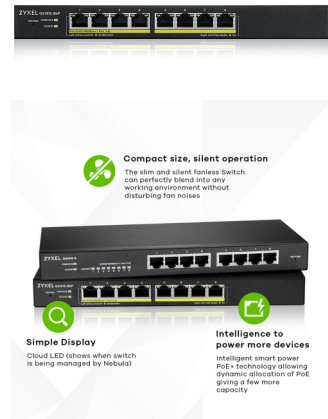

Brand : Zyxel

Product code: GS1915-8EP-GB0101F

Product name : GS1915-8EP

GS1915-8EP, 8-port GbE Smart Managed PoE Switch

Zyxel GS1915-8EP. Switch type: Managed, Switch layer: L2. Basic switching RJ-45 Ethernet ports type: Gigabit Ethernet (10/100/1000), Basic switching RJ-45 Ethernet ports quantity: 8. Full duplex. MAC address table: 8000 entries, Switching capacity: 16 Gbit/s. Networking standards: IEEE 802.1Q, IEEE 802.1p, IEEE 802.1x, IEEE 802.3, IEEE 802.3ab, IEEE 802.3ad, IEEE 802.3af, IEEE.... Power connector: AC-in jack. Power over Ethernet (PoE)

Management features		Design	
Switch type *	Managed	Product colour	Black
Switch layer	L2	LED indicators	✓
Quality of Service (QoS) support	✓	Electromagnetic compatibility	LVD EN60950-1, BSMI CNS14336-1
Web-based management	✓	Certification	CE, FCC, C-Tick, Class A, Class B, BSMI CNS13438
System event log	✓		
MIB support	RFC 1213 MIB II, RFC 2819, RFC 1215, RFC 1493		
Ports & interfaces		Performance	
Basic switching RJ-45 Ethernet ports quantity *	8	Mean time between failures (MTBF)	1641000 h
Basic switching RJ-45 Ethernet ports type *	Gigabit Ethernet (10/100/1000)		
Gigabit Ethernet (copper) ports quantity	8	Power	
Power connector	AC-in jack	Power source *	AC
		AC input voltage	200 - 240 V
		Power consumption (max)	72 W
Network		Power over Ethernet (PoE)	
Networking standards *	IEEE 802.1Q, IEEE 802.1p, IEEE 802.1x, IEEE 802.3, IEEE 802.3ab, IEEE 802.3ad, IEEE 802.3af, IEEE 802.3at, IEEE 802.3az, IEEE 802.3u, IEEE 802.3x	Power over Ethernet (PoE) *	✓
10G support *	✗	Power over Ethernet (PoE) ports quantity	8
Copper ethernet cabling technology	10BASE-T, 100BASE-TX, 1000BASE-T	Total Power over Ethernet (PoE) budget	60 W
Full duplex	✓	Operational conditions	
Flow control support	✓	Operating temperature (T-T)	0 - 40 °C
Broadcast storm control	✓	Storage temperature (T-T)	-40 - 70 °C
Rate limiting	✓	Operating relative humidity (H-H)	10 - 95%
Auto MDI/MDI-X	✓	Storage relative humidity (H-H)	10 - 95%
VLAN support	✓	Heat dissipation	245.52 BTU/h
Number of VLANs	8	Weight & dimensions	
Data transmission		Width	250 mm
Switching capacity *	16 Gbit/s	Depth	104 mm
Forwarding rate	11.9 Mpps	Height	27 mm
MAC address table *	8000 entries	Weight	620 g
Jumbo frames support	✓	Packaging data	
Jumbo frames	9000	Cables included	AC
Packet buffer memory	0.525 MB	Quick start guide	✓
		User guide	✓
		Manual	✓
		Package width	302 mm
		Package depth	227 mm
		Package height	64 mm
		Package weight	1.4 kg
Security			
IGMP snooping	✓		
MAC address filtering	✓		

Security		Logistics data	
SSH/SSL support	✓	Harmonized System (HS) code	85176990
Multicast features			
Multicast support	✓		
Protocols			
Management protocols	SNMP v1,v2,v3, RMON (1,2,3,9)		



4718937621941

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.