

## DELL Precision 3591 Intel Core Ultra 7 165H Mobile workstation 39.6 cm (15.6") Full HD 32 GB DDR5-SDRAM 1 TB SSD NVIDIA RTX 2000 Ada Wi-Fi 6E (802.11ax) Windows 11 Pro Grey

Brand : DELL

Product family: Precision

Product code: T7RCD

Product name : 3591

- Windows 11 Pro 64-bit

- Intel Core Ultra 7 165H (24MB Cache)
- 39.6 cm (15.6") Full HD 1920 x 1080 IPS, NVIDIA RTX 2000 Ada (8GB GDDR6)

- 32GB DDR5-SDRAM (1 x 32) & 1000GB SSD

Intel Core Ultra 7 165H (24MB Cache), 32GB DDR5-SDRAM, 1000GB SSD, 39.6 cm (15.6") Full HD 1920 x 1080 IPS, Intel Arc Graphics, NVIDIA RTX 2000 Ada (8GB GDDR6), LAN, WLAN, Webcam, Windows 11 Pro 64-bit

## DELL Precision 3591 Intel Core Ultra 7 165H Mobile workstation 39.6 cm (15.6") Full HD 32 GB DDR5-SDRAM 1 TB SSD NVIDIA RTX 2000 Ada Wi-Fi 6E (802.11ax) Windows 11 Pro Grey:


## Extraordinary performance. AI at your fingertips.

Intelligently optimised and high performing, the Precision 3591 is a powerful entry-level workstation for design and creative applications.








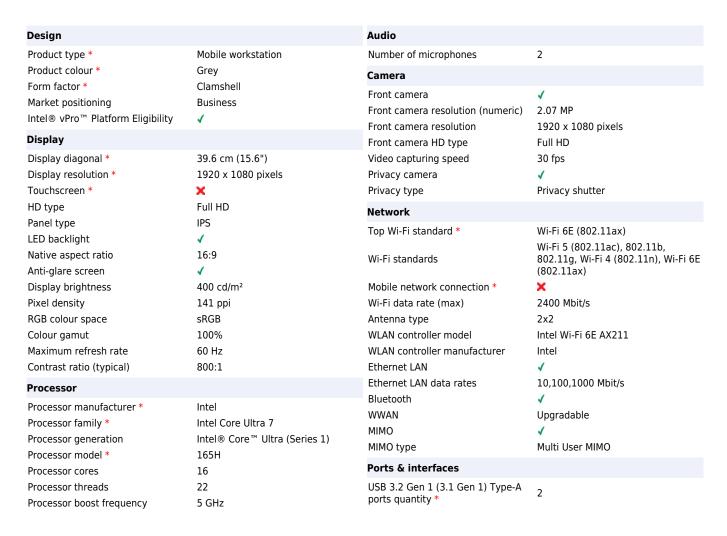

ProcessorPorts interactsProferamence core66Efficient cores8HDM (parts, paint)*1Index toris2HDM version2.1Performance core has Turbo5 GH2Index toris quantity*2Interpancy13 GH2Combe headphone/mic port4Index toris quantity2.5GH2Combe headphone/mic port4Index toris quantity3.6 GH2Combe headphone/mic port4Index toris quantity3.6 GH2Number of USB ports with1Processo cache type2.4 MBNumber of USB ports with1Processo cache type2.5 MIC CoheWithout ports4Nursi processor with INU1Inde Al BoatsKyboard number of Kys100Nursi processor with INU1Inde Al BoatsKyboard number of Kys100Nursi processor with INU1Inde Al BoatsKyboard number of Kys100Nursi processor with INU1Inde Al BoatsKyboard quantity64-DH1Nursi processor with INU1Inde Al BoatsKyboard quantity64-DH1 <th>Dracoscar</th> <th></th> <th>Doute &amp; interferee</th> <th></th>	Dracoscar		Doute & interferee	
finder orgs810M ports quantly, a1Lan Pore Riffication22Personance care Max Turbo3.6 Hz.Tunderbolt A ports quantly2Efficience Max Turbo Frequer3.6 Hz.Charabig ports quantly2.6 Hz.Efficience Max Turbo Frequer3.6 Hz.Charabig ports quant dual dual dual dual dual dual dual dual	Processor	<u>,</u>	Ports & interfaces	
Low Power Efficiencore May Turb2HOM weak of the properties of the p				
Priquency requencyGenTunderbol parts2 A construct Part of the Tunderbol parts2 A construct Part of Tunderbol part of Tunderbol parts2 A construct Part of Tunderbol parts				
Frequency5.00.2Intel® Tunderbolt 2/Dire Nover fiftiert ore Nav Tub3.6 GitzCharging port typeUSB Type-CLow Nover fiftiert ore Nav Tub2.5 GitzCharging port typeUSB Type-CPerformance ore base frequency9.0 GitzMB type-C DisplayPort Alterna/Performance ore base frequency9.0 GitzMB type-C DisplayPort Alterna/Processor cache20.0 MHzPowerShare//Processor cache24.08Number of USB pots with//Processor cache28.WPowerShareUK Englain/Processor cache28.WRoybeard Buskit//Narual processor with (NPU)Itel Al BootKeybeard Buskit//Narual processor with (NPU)Itel Al BootKeybeard Buskit//Narual processor with (NPU)Itel Al GitzKeybeard Buskit//Narual processor with (NPU)<				
Ellictic core Max Turbo Frequency8.8 GridControl headpronymic port9.9 GridPrequency2.5 GrizOraphip on type05 Bype CPerformance-core base frequency0.9 GritUBI Pec C DispleyPort Altented4Performance-core base frequency0.9 GritUSB Power Delivey7Prequency0.9 GritUSB Power Delivey7Prequency0.9 GritNumber of USB power bolivey7Presensor cache typeSand ControlNumber of USB power bolivey7Poressor cache typeSand ControlNumeric Kype Sand7Naruar porcessor rache typeIs WPolinig delive7Naruar porcessor rache type1.4 GritKyboard backitK EnglishNaruar porcessor rache type1.4 GritKyboard backitMc EnglishNaruar porcessor rache type1.4 GritKyboard backitMc EnglishA databys popport on NPUPiceLiceOracina system arbitesMc EnglishNaruar typePiceLiceOracina system arbitesMc EnglishNaruar typePiceLiceOracina system arbitesMc EnglishNaruar typePiceLiceOracina system arbitesMc EnglishNaruar typePiceLicePiceLiceNaruar typeNaruar typePiceLiceNaruar typeNaruar typeNaruar typePiceLiceNaruar typeNaruar typeNaruar typePiceLiceNaruar typeNaruar typeNaruar typePiceLiceNaruar typeNaruar typeNaruar type<		5 GHz		
Frequency2.5 GPLCatagraph (V) (Kather and Catagraph (V) (K) (Kather and Kather and	Efficient-core Max Turbo Frequency	3.8 GHz	Combo headphone/mic port	
Performance-one base frequency1.4 GHz ModeDBA lype-L Darphythot AttendedIDerivershore0.9 GHzUSB Nover DeliveryIIEnvironment Efficient core Base Frequency700 MHzPowershoreIIProcessor cache24 MBNumber of USB ports with1IProcessor cache typeSmart CacheKeyboard ImagageUK EnglishProcessor cache type30 WRevboard ImagageUK EnglishNaural processor unit (NPU)Intel Al BoostKeyboard ImagageUK EnglishNaural processor unit (NPU)Intel Al BoostKeyboard ImagageUK EnglishAdstayse support on PPUP16, P32, Int8Operating system architecture64-bitAdstayse support on PPUP16, P32, Int8Operating system architecture64-bitAdstayse support on PPUP16, P32, Int8Operating system installedMolf concol CheeMindow Kur tinteral memory *22 GBOperating system installedWindow SHLNumber of battery cells30 day Triat offer Outbre12 dayInternal memory *20 GBSolutorWindow SHLMemory stor20 SO MMSBattery cells4Memory stor20 SO MMSBattery cells13 curceMemory stor20 SO MMSBattery cells30 day Triat offer OutbreMemory stor20 SO MMSBattery cells13 curceMemory stor20 SO MMSBattery cells30 day Triat offer OutbreSorge media30 SO MASSolutery30 day Triat o		2.5 GHz		USB Type-C
Efficiency income bases0.9 GHzUSB Power Shares/Processor cache type24 MBPowerShare support/Processor cache typeSmart CacheKeybardPowerShare supportProcessor cache type28 WPowerShare support/Neural processor unit (NPU)115 WPowerShare support/Neural processor unit (NPU)1.4 GHzKeybard language/Neural processor unit (NPU)1.4 GHzKeybard backit/Namich keybard support///Al datage support on NPUPiels, Piez, IntilOperating system rankage64-bitShart System stander/Operating system inatage64-bitAl datage support on NPUPiels, Piez, IntilOperating system inatage64-bitShart System stander/Operating system inatage64-bitInternal memory type20 GBOperating system inatage9.00 KitNamory functional system21 GBOperating system inatage64 GHMemory functional system21 GBOperating system inatage64 GHMemory functional system25 GBOperating system inatage64 GHMemory functional system25 GBOperating system inatage7.00 KitMemory functional system25 GBOperating system inatage64 GHMemory functional system25 GBOperating system inatage7.00 KitMemory functional system25 GBOperating system inatage3.00 KitMemory functional system25 GB <td< td=""><td>Performance-core base frequency</td><td>1.4 GHz</td><td></td><td>✓</td></td<>	Performance-core base frequency	1.4 GHz		✓
FrequencyNUMR2Number of SB ports with Poressor cache bype2 MBProcessor cache bypeSmart CacheKeyboardNumber of SB ports with PowerShame support1Processor cache bype28 WPointing deviceTourbandNeural processor unit (NPU)14 GbatKeyboard languageUK English Marting travelanceShartman tradepower NU14 GbatKeyboard backtifMarting travelanceShartman frequency NU14 GbatKeyboard backtifMarting travelanceMichael Stapport/Operating system architectur64-bitShartman frequency NU14 GbatOperating system architectur64-bitAl datatype support on NUPP16, FP21, Inf8Operating system inatiguageGerman, Dutch, English, French, ItalianAl datatype support on NUPP16, FP21, Inf8Operating system inatiguageGerman, Dutch, English, French, ItalianMicroson StupportDieterML, OMNK RT, OperVINO, Windows StupportOperating system inatiguageMindows 11 Offer OnlyKeyboard Internory Tipe20 GBDieterML, OMNK RT, OperVINO, Windows 11 Offer OnlyNumber of StappMicroson Stupport1.92 GBOperating system inatiguage64 OthMicroson Stupport1.92 GBDieterML, OMNK RT, OperVINO, Windows 11 Offer OnlyStappMicroson Stupport1.92 GBDieterML, OMNK RT, OperVINO, Windows 11 Offer OnlyStappMicroson Stupport1.92 GBDieterML, OMNK RT, OperVINO, Windows 11 Offer OnlyStappMicroson Stupport1.92 GB	Efficient-core base frequency	0.9 GHz		4
Processor cache Processor cache type24 MBNumer of USB ports with PowerShare support1Processor cache type26 WKeybardTouchpadNeural processor unit (NPU)Intel AI BoostKeybard number of keysUK EnglishNeural processor unit (NPU)1.4 GHzKeybard number of keys100Maximu frequercy NPU1.4 GHzKeybard number of keys100Ministry frequercy NPU1.4 GHzKeybard number of keys64-bitMaximu frequercy NPU1.4 GHzOperating system architecture64-bitMinistry frameworks supportPIG, FP32, Inf8Operating system architecture64-bitAl datalyze supportWindows MLOperating system installed *Windows 11 ProAl datalyze supportSOBAMBattery100Memory form factorSO-DIMNumber of battery cells4Memory layout (sldts xis)1.x 32 GBBattery vachage time3.h 140Memory layout (sldts xis)2.X SO-DIMBattery vachage time3.h 140Namer of battery cellsA Support2.8 SO-DIMBattery vachage time3.h 140Memory layout (sldts xis)2.X SO-DIMBattery vachage time3.h 140Namer of battery cellsA Support3.0 Windows 113.0 Windows 11Non-ecccSO-DIMBattery vachage time3.h 140Namer of battery cellsA Support3.0 Windows 113.0 Windows 11Non-ecccSO-DIMBattery recharge time3.h 140Non-ecccSO-DIMBattery recharg		700 MHz	PowerShare	1
Numeric large powerProcessor calcFinal CacheKaybaardProcessor base power28 WPointing deviceTouchpadNexal processor unit (NPU15 WPointing deviceTouchpadNeural processor unit (NPUIntel A BoostKeyboard hanguageV FenglesNeural processor unit (NPUIntel A BoostKeyboard hanguageV FenglesNeural processor unit (NPUIntel A BoostKeyboard hanguageV FenglesSparsity support/GoranGoranGoranJ datatyse support/Operating system architectureGarman, Duchs, Engles, Frence, RulJ datatyse support/Operating system architectureGoran, Duchs, Engles, Frence, RulJ datatyse support/Operating system installedMol Morconfolling Lecence includedJ datatyse support/So SoSo SolSolJ advatyse support/SolOperating system installedMolescal I PorJ advatyse support/SolSolSolSolJ advatyse support/SolSolSolSolJ advatyse support/SolSolSolSolJ advatyse support/SolSolSolSolJ advatyse support/SolSolSolSolJ advatyse support/SolSolSolSolJ advatyse support/SolSolSolSolMemory form factorSolSolSolSolSol <t< td=""><td></td><td>24 MB</td><td></td><td>1</td></t<>		24 MB		1
Processor base power Maximum turbe power28 WPower Pointing dive Keybaard languageUK English UK EnglishNeural processor unit (NPU)Intel AI BoostKeybaard languageUK English AttackMaximum frequency NPU1.4 GH2Keybaard hackilit4Maximum frequency NPU1.4 GH2Keybaard number of keys100Al datatype support on NPUP16, FP2, Int8Operating system architecture64-bit HainanA software frameworks support of by NPUDirectNL, OMNX RT, OpenVINO Windows NLOperating system installed **Windows 11 ProNemory25 GBOperating system installed **Windows 11 ProInternal memory YupeDDFS SDRAM BatteryWindows 11 ProMemory function50-DIMM Battery voltage4Memory data transfer rate50-DIMM Battery voltage4Memory data transfer rate560 MT/S Battery voltage3.1 CNon-ECCAl Sattery cells4Maximum interal memory *17B SO GA280 gTotal Storge capacity17B SO GA200 gStorge media15C200 gStorge media280 gTotal Storge capacity17B SO GA200 gStorge media12B SO				
Neural processor unit (NPU)Intel Al BoostKeybaard language Numeric keypad *VK English ANeural processor unit (NPU)Intel Al BoostKeybaard number of keys100Maximum frequency NPU1.4 GHzKeybaard number of keys100Al datayse support*/Operating system architecture64-bitAl datayse support on NPUPF16, FF22, Int8Operating system languageGerman, Dutch, English, French, talianAl datayse support on NPUDirectML, ONNX RT, OperVINO, by NPUOperating system languageGerman, Dutch, English, French, talianMemory forSO-DIMMDirectML, ONNX RT, OperVINO, by NPUOperating system languageWindrows 11 ProInternal memory typeDR5-SDRAMBattery capacity *64 GHMemory digt transfer rateSO-DIMMBattery capacity *64 GHMemory digt transfer rateSO-DIMMBattery capacity *64 GHMemory digt transfer rateSOO MI/SFast charging4Storage endia*SSDAc dagter proveng initicator4Storage capacity *178Pewer50 of H2Total SDS capacity178Cadagter frequency100 - 240 VSD cap			Keyboard	
Neural processor unit (NPU)     Intel Al Boot     Addition       Maximum frequency NPU     14 GHz     Keyboard backitt     A       Sparsity support     A     Software     100       Sparsity support     A     Software     100       Al dataype support on NPU     PF0E, FP3Z, Int8     Operating system and/textem     64-bit       Al software frameworks support on NPU     PF0E, FP3Z, Int8     Operating system insquage     German, Dutch, English, French, Italian       Al software frameworks support on NPU     DirectML, OMX RT, OpenVINO, Windows Stution of Software     No Microsoft Office Licence included       Internal memory type     DDRS SDRAM     Battery voltage     54       Memory form factor     SO-DIMM     Battery voltage     51.2 V       Memory losot (sits sxize)     1 X 32 GB     Battery voltage     51.2 V       Maximum internal memory 'S     6608 MTS     Fastcharging     4       Non-ECC     V     Battery voltage     51.2 V       Storage capacity     1 TB     Cadagter power     30 day       Total storage capacity     1 TB     Cadagter frequency     50 - 60 Hz	Maximum turbo power	115 W		•
Neural processor unit (NPU)Intel Al BoostNumeric keyped*4Maximum frequency NPU1.4 GhtzKeyboard number of keys100Sparsity support4German, Durch, English, French, ItalianGerman, Durch, English, French, ItalianAl datatype support on NPUFP16, FP32, Int8Operating system anchitecture64-bitAl software fremworks supportDirectML, ONNX RT. OpenVINO, Windows MLTrial software64-bitMemory22 G8Operating system installed*Windows 11 ProInternal memory VpeDBS-SORAMBattery4Memory logit fast size)1 x32 G8Battery colarig system installed*4Memory logit fast size)1 x32 G8Battery voltage15.2 VMemory data transfer rate5600 MT/sBattery voltage10.0 CHCTotal storage capacity*1 TBAc dadpter frequency30 hTotal storage capacity*1 TBAc dadpter frequency50 of H2Total SDS capacity1 TBAc dadpter frequency50 of H2SD interfacePOI Express 4.0Security10.0 CHCSD formance class40Cale class input voltage10.0 CHCSD formationKeyboardCale classit ruput voltage2.0 CHC <td>Neural processor unit (NPU)</td> <td></td> <td></td> <td>5</td>	Neural processor unit (NPU)			5
Maximum frequency NPU1.4 GHzReyband number of keys100Sparsity supportVSoftwareSoftwareAl dataype support on NPUPP16, FP32, Int8Operating system languageGerman, Dutch, English, French, U minows MLAl dataype support on NPUPP16, FP32, Int8Operating system languageGerman, Dutch, English, French, U minows MLKemoryDirectM, ONKAR TO, OpenVINO, Windows MLOperating system installed *Windows 11 PoInternal memory typeDDR5-SDRAMBatteryWindows 11 PoMemory form factorSO-DIMMBattery outge3 hMemory form factorSO-DIMMBattery voltage15.2 VMemory form factorSO-DIMMBattery voltage15.2 VMemory form factorSO-DIMMBattery voltage15.2 VMemory form factorSO-DIMMBattery voltage15.2 VMemory form factorSO-DIMMBattery voltage3 hMonery Gaust Galaxy17.8Battery voltage25.0 VNon-ECCVSo-DIMMBattery voltage10.0 WSorage media*SSDSSDAc adapter frequency3 of 60.1 HSorage media*TBCadapter frequency50.6 0H /2Sorage media*SSDSO-GO /2SO-GO /2SSD enderingYSo-GO /2YSSD enderingYCadapter frequency50.6 0H /2SSD performance class40Calable Ck slot typeYSSD performance class40Cale Ck slot typeY <t< td=""><td>• • •</td><td>Intel Al Boost</td><td><b>31</b></td><td></td></t<>	• • •	Intel Al Boost	<b>31</b>	
Sparsity support/Regulation function for yrs100Windows Studio effects support/Software100Al datayte support on NPUPP16, FP32, Int8Operating system architecture64-bitAl datayte support on NPUDirectML, ONNX RT, OpenVINO, Windows MLOperating system architecture64-bitAl software frameworks supportedDirectML, ONNX RT, OpenVINO, Windows MLOperating system installed *Windows 11 FroMemory20 GBOperating system installed *Windows 11 FroInternal memory *SO-DIMMBattery capacity *64 WhMemory for factorSO-DIMMNumber of battery cells4Memory data transfer rateSOO DIMBattery capacity *64 GBMemory data transfer rateSOO MT/sFast charging√Storage capacity *1 TBAC adapter power30 WStorage media *SSOAC adapter fraquency50 - 60 HzStorage media *SSOAC adapter input voltage100 - 240 VSSD capacity1 TBAC adapter input voltage100 - 240 VSSD form factorM.2Cable lock slot typeVedgeSSD form factorM.2Tusted Platform Module (TPM)2.0SSD form factorM.2Socieeeeeeeeeeeeeeeeeeeeeeeeeeeeeeeeeeee			•	
Windows Studio effects support/SoftwareAI datxppe support on NPUFP16, FP32, Int8Operating system architecture6d-bitAI software frameworks supportDirecttMI, ONNX RT, OpenVINO, Windows MLOperating system inguageReinfam, Dutch, English, Franch, ItalianMemory2 GBOperating system inguageNo Microsoft Office Licence included - 30 day Trial Offer OnlyInternal memory*2 CBOperating system installed *Windows 11 ProMemory form factorSO-DIMMBattery capacity *6 de WhMemory form factorSO-DIMMBattery voltage15.2 VMemory form factorSO-DIMMBattery voltage15.2 VMemory lada transfer rateS600 MT/sBattery voltage15.2 VMemory data transfer rateS500 AT/sBattery voltage10Yorage capacity *1 TBPower-Storage capacity *1 TBAC adapter fraquery50 - 60 HzNumber of SSDs installed1 TBAC adapter fraquery100 - 240 VSSD capacity1 TBAC adapter fraquery50 - 60 HzNomefactorVScorege100 - 240 VSSD installed1 CScorege100 - 240 VSSD form factorM.2Cable lack slot typeVedgeSSD form factorM.2Cable lack slot type4SSD form factorM.2Cable lack slot typeVedgeSSD form factorM.2Scorege100 - 240 VSSD form factorM.2Scorege4				100
Astraction of the constraint of the constra		1		
Instrume instructions subportedDistrict functions windows functions windows functions windows functions windows functionsOperating system instructions a day Trial Offree OnlyMemory22 GBOperating system installed*Windows 11 ProInternal memory typeDDRS-SDRAMBatteryWindows 11 ProMemory form factorSO-DIMMNumber of battery cells4Memory layout (slots size)1 x32 GBBattery64 WhMemory data transfer rate5000 MT/SBattery recharge time3 hMemory data transfer rate5000 MT/SFast chargingNon-ECCVBattery recharge time3 hStorage media*SSDFast chargingStorage media*SSDAC adapter frequency50 · 60 HzNumber of SDS installed1AC adapter frequency50 · 60 HzNumber of SDS installed1AC adapter frequency50 · 60 HzSSD interfacePCI Express 4.0Security100 · 240 vSSD performance class40Cable lock slotAge transferateSecurity1 Trusted Platform Module (TPM)Age transferateVICOSD (TransFlash), MicroSDHCVerage temperature (T-7)0 - 35 ° CSSD performance classMore SDD (TransFlash), MicroSDHCVerage temperature (T-7)0 - 35 ° COperating relative humidity (H-H)10 - 90%10 - 90%10 - 90%Discrete graphics card mode/MICOSD (TransFlash), MicroSDHCVerage temperature (T-7)0 - 65 ° C <t< td=""><td>AI datatype support on NPU</td><td>FP16, FP32, Int8</td><td>Operating system architecture</td><td></td></t<>	AI datatype support on NPU	FP16, FP32, Int8	Operating system architecture	
MemoryInfa software- 30 day Trial Offer OnlyInternal memory typeDBS-SDRAMBetteryMemory form factorSO-DIMMNumber of battery cells4Memory form factorSO-DIMMNumber of battery cells4Memory layout (slots xsize)1 x 32 GBBattery capacity64 WhMemory data transfer rateS600 MT/SBattery recharge time3 hMemory data transfer rateS600 MT/SFast charging√Non-ECC√Battery verlage indicator280 gTotal storage capacity1 TBAC adapter power130 WStorage mediaSSDSSDAC adapter frequency50 of H2Number of SSDs installed1AC adapter frequency50 of H2SSD parkfromTTBAC adapter frequency50 of H2SSD form factorN2Security100 - 240 VSSD interfacePCI Express 4.0USB charging voltage520 VSSD performance class40Solta lock slot typeWeegeAct adapter input voltage100 - 240 V240 VSSD performance class40Solta lock slot typeVeegeAct adapter input voltage100 - 240 V240 VSSD performance class40Solta lock slot typeVeegeAct adapter input voltage100 - 240 V240 VSSD performance class40Solta lock slot typeVeegeAct adapter input voltage100 - 240 V240 VSSD performance class40Solta lock slot type1			Operating system language	Italian
Internal memory type DDRS-SDRAM Battery Memory form factor SO-DIMM Number of battery cells 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4	Memory		Trial software	
Memory form factorSO-DIMMMumber of battery cells4Memory layout (slots x size)1 x 32 GBBattery capacity*6 4 WhMemory slots2x SO-DIMMBattery voltage15.2 VMaximum internal memory*64 GBBattery voltage3 hMemory data transfer rate5600 MT/sFast charging4Non-ECC4Battery recharge time3 hNon-ECC7Battery weight3 OStorage1 TBPower30 OTotal storage capacity*1 TBAC adapter power130 WStorage media*SSDAC adapter frequency50 - 60 HzNumber of SSDs installed1AC adapter frequency50 - 60 HzNumber of SSDs installed1AC adapter input voltage100 - 240 VSSD interfacePCI Express 4.0USB charging voltage20 VSSD interfacePCI Express 4.0Security4SSD performance class40Cable lock slot4SSD sinstalled1.280 (22 x 80 mm)Smart card reader4MicroSD (TransFlash), MicroSDHTrusted Platform Module (TPM)2.0Optical drive type*XONStorage temperature (T-T)40 - 65 °CDiscrete graphics card model*MicroSDAOperating relative humidity (H+H)10-90%Discrete graphics card model*MicroSDAOperating relative humidity (H+H)10-90%Discrete graphics card model*MicroSDAOperating relative humidity (H+H)10-90%Discrete graphics card*4 </td <td>•</td> <td></td> <td>Operating system installed *</td> <td>Windows 11 Pro</td>	•		Operating system installed *	Windows 11 Pro
Memory layout (slots x size)1 x 32 GBNumber of battery capacity*4Memory slots2x SO-DIMMBattery vapacity*64 WhMaximum internal memory*64 GBBattery vapacity*64 WhMemory data transfer rate500 MT/sFast charging7Non-ECCBattery recharge time3 hNon-ECCBattery recharge time3 hStorageBattery recharge time3 hTotal Storage capacity*1 TBBattery recharge indicator30 WStorage media*SSDAC adapter power100 - 240 VStorage media*1AC adapter input voltage100 - 240 VStorage trafset1 TBAC adapter input voltage100 - 240 VSSD capacity1 TBAC adapter input voltage100 - 240 VSSD interfacePC Express 4.0Cacharge input voltage5.20 VSSD form factorM2Cable lock slot slot4SSD form factorM2Cable lock slot type4MurcoSD fransFlash, MicroSDFWatee Platform Module (TPM)2.0Agate integrated4IncresDT cransFlash, MicroSDF2.0Carpatise armony card8 GBOperating relative humidity (H+H)0.90%Discrete graphics card model*NIDIA RTX 2000 AdaStorage temperature (T-T)40 - 65 *CDiscrete graphics card model*NIDIA RTX 2000 AdaStorage temperature (T-T)40 - 65 *CDiscrete graphics card model*NIDIA RTX 2000 AdaStorage temperature			Battery	
Memory slots2x SO-DIMMBattery capacity*64 WinMaximu internal memory*64 GBBattery voltage5.2 VMemory data transfer rate5600 MT/sBattery charge time3 hSom-ECC4Battery charge time3 hNon-ECC4Battery charge indicatom7Storage1 TBBattery voltage indicatom280 gTotal storage capacity*1 TBSome130 WStorage media*SSDAC adapter power130 WTotal SSDs capacity1 TBCadapter frequency50 - 60 HzSSD installed1AC adapter frequency50 - 60 HzSSD interfacePCI Express 4.0USB charging voltage5.0SSD form factorM.2Cable lock slot4SSD performance class40Cable lock slot typeVedgeSSD size2280 (22 x 80 mm)Smart card reader4Card reader integrated/Version2.0Orbical drive typeKicroSDXCPoertion Module (TPM)2.0SD form factorNINDIA RTX 2000 AdaStorage temperature (T-T)0.35 °CDiscrete graphics card model*NIDIA RTX 2000 AdaStorage tentive hunditly (H+H)0.9%Discrete graphics card model*NIDIA RTX 2000 AdaStorage tentive hunditly (H+H)0.9%Discrete graphics card model*NIDIA RTX 2000 AdaStorage tentive hunditly (H+H)0.9%Discrete graphics card model*NIDIA RTX 2000 AdaStorage tentive hunditly (H+H)0.9%Discrete graph			Number of battery cells	4
Maximum internal memory* Memory data transfer rate64 GB 5600 MT/sBattery voltage15.2 VMemory data transfer rate5600 MT/sBattery voltage3 hNon-ECC✓Fast charging✓Storage✓Battery voltage indicator✓Storage capacity *1 TBBattery voltage280 gTotal storage capacity1 TBAC adapter power30 · 60 HzStorage media *SSDAC adapter frequency50 · 60 HzNumber of SSDs installed1 TBAC adapter input voltage100 · 240 VSSD capacity1 TBAC adapter input voltage5.20 VSSD capacity1 TBAC adapter input voltage5.20 VSSD partifacePCI Express 4.0USB charging voltage5.20 VNVMe✓Cable lock slot typeWedgeSSD porformance class40Cable lock slot typeWedgeSSD sportifacteVSource Partifice✓Quical drive type *XTrusted Platform Module (TPM)√Card reader integrated✓Trusted Platform Module (TPM)0.0Cardreader integratedVIDIA RTX 2000 AdaStorage relative humidity (H+H)10 · 90%Discrete graphics card model *VIDIA RTX 2000 AdaStorage relative humidity (H+H)0 · 95%Discrete graphics card model *✓Operating relative humidity (H+H)0 · 95%On-board GPU manufacturerIntel Arc GraphicsGorage relative humidity (H+H)0 · 95%On-board graphics card fomilyIntel Ar			Battery capacity *	64 Wh
Memory data transfer rate 5600 MT/s Battery recharge time 3 h   Non-ECC Image: Second Sec	•			
Non-ECC ✓ Battery charge indicator ✓   Storage 280 g   Total storage capacity* 1 TB Power   Storage media* SSD AC adapter power 130 W   Total SSDs capacity 1 TB AC adapter frequency 50 - 60 Hz   Number of SSDs installed 1 AC adapter input voltage 100 - 240 V   SSD capacity 1 TB AC adapter input voltage 5,00 V   SSD installed 1 AC adapter input voltage 100 - 240 V   SSD capacity 1 TB AC adapter input voltage 5,00 V   SSD form factor M.2 Cable lock slot ✓   SSD performance class 40 Cable lock slot type Wedge   VMMe 280 (22 x 80 mm) Smart card reader ✓   Optical drive type* X Trusted Platform Module (TPM) ✓   Card reader integrated ✓ ✓ ✓   Graphices X Trusted Platform Module (TPM) ✓   Discrete graphics card model* NIDIA RTX 2000 Ada Storage temperature (T-T) 0.40 655 °C   Discrete graphics card memory SGB GDDR6 Storage temperature (T-T) 0.40 655 °C   Discrete graphics card fomel/* KIEM Vereting shock		5600 MT/s		
StorageBatter weight280 gTotal storage capacity1TBPowerStorage mediaSSDAC adapter power130 WTotal SSDs capacity1TBAC adapter frequency50 - 60 HzNumber of SSDs installed1AC adapter input voltage100 - 240 VSSD capacity1TBAC adapter input voltage5.20 VSSD interfacePCI Express 4.0SSD inf factorM.2NMMeCable lock slot typeVedgeSSD performance class40Cable lock slot typeWedgeM.2 SSD size2280 (22 x 80 mm)Smart card readerOptical drive type *XTrusted Platform Module (TPM)2.0Compatible memory cardsMicroSD (TransFlash), MicroSDFursted Platform Module (TPM)2.0Discrete graphics card memory8 GBOperating relative humidity (H-H)1.0 s9%Discrete graphics card memorySGD BDA6Storage relative humidity (H-H)0.95%Discrete graphics card memory4Operating relative humidity (H-H)0.95%Discrete graphics card memory4Operating altitude1.52.2 voltageDiscrete graphics card *Intel Arc GraphicsNonoperating altitude1.52.2 voltageDiscrete g	Non-ECC	4		
Total storage capacity *1 TBPowerStorage media *SSDAC adapter power130 WTotal SSDs capacity1 TBAC adapter frequency50 - 60 HzNumber of SSDs installed1AC adapter frequency50 - 60 HzSSD capacity1 TBAC adapter input voltage100 - 240 VSSD capacity1 TBUSB charging voltage5,20 VNVMeSecurityStorage tripper voltage5,20 VNVMeCable lock slotSSD form factorM.2Cable lock slot typeWedgeSSD performance class40Cable lock slot typeWedgeQptical drive type *XTrusted Platform Module (TPM)Quical drive type *XTrusted Platform Module (TPM).0Compatible memory cardsMicroSD (TransFlash), MicroSDH MicroSD (TransFlash), MicroSDH Perating temperature (T-T)0 - 35 °CDiscrete graphics card model *NVIDIA RTX 2000 AdaStorage temperature (T-T)0 - 35 °CDiscrete graphics card model *NVIDIA RTX 2000 AdaStorage tenperature (T-T)0 - 95%Discrete graphics card model *NVIDIA RTX 2000 AdaStorage relative humidity (H-H)0 - 95%Discrete graphics card model *Intel Arc GraphicsOperating relative humidity (H-H)0 - 95%On-board GPU manufacturerIntelOperating shock110 6On-board graphics card *Operating shock160 GOn-board graphics card familyIntel Arc GraphicsNon-operating s	Storage		, ,	-
Storage media*SSDAC adapter power130 WTotal SSDs capacity1 TBAC adapter frequency50 - 60 HzNumber of SSDs installed1AC adapter input voltage100 - 240 VSSD capacityTBUSB charging voltage5,20 VNVMeCable lock slotNVMeCable lock slotSSD performance class40Cable lock slot typeWedgeM.2 SSD size2280 (22 x 80 mm)Smart carl readerOptical drive type*XTrusted Platform Module (TPM)AC adapter integratedMicroSD (TransFlash), MicroSDHOVersion2,0Storete graphics card model*NVIDIA RTX 2000 AdaStorage temperature (T-T)0.35 °CDiscrete graphics card memory6DBR6Storage relative humidity (H-H)0.95%On-board graphics card*Qperating altitude-15.2. 3048 mOn-board GPU manufacturerIntel Arc GraphicsNon-operating altitude-15.2. 10668 mDiscrete graphics card model*Intel Arc GraphicsOperating shock110 GOn-board graphics card familyIntel Arc GraphicsOperating shock150 GOn-board graphics card model*Intel Arc GraphicsStorage relative humidity (H-H)0.66 GOn-board graphics card familyIntel Arc GraphicsNon-operating altitude15.2. 10668 mOn-board graphics card familyIntel Arc GraphicsNon-operating altitude160 GOn-board graphics card familyIntel Arc G	Total storage capacity *	1 TB		
Total SSDs capacity1 HBAC adapter frequency50 - 60 HzNumber of SSDs installed1AC adapter input voltage100 - 240 VSSD capacityTBUSB charging voltage5,20 VSSD interfacePCI Express 4.0Security5NVMeSecurityVedgeSSD form factorM.2Cable lock slotSSD sperformance class40Cable lock slot typeWedgeM.2 SSD size2280 (22 x 80 mm)Smat card readerOptical drive type *Trusted Platform Module (TPM)Card reader integratedTrusted Platform Module (TPM)2.0Compatible memory cardsMicroSD (TransFlash), MicroSDHC MicroSDXCOperating temperature (T-T)Discrete graphics card model *NVIDIA RTX 2000 AdaStorage temperature (T-T)Discrete graphics card memory8 GBOperating relative humidity (H-H)Discrete graphics card memory6DDR6Storage relative humidity (H-H)On-board graphics card *Operating altitudeOn-board graphics card familyIntel Arc GraphicsNon-operating altitudeOn-	Storage media *	SSD		120 W
Number of SSDs installed1AC adapter input voltage100 - 240 VSSD capacity1 TBUSB charging voltage5,20 VSSD interfacePCI Express 4.0USB charging voltage5,20 VNVMeImage: Comparison of SSDs interfaceM.2Cable lock slotImage: Comparison of SSD performance classSSD performance class40Cable lock slot typeWedgeM.2SSD size2280 (22 x 80 mm)Smart card readerImage: Comparison of SSDS (TransFlash), MicroSDHCOptical drive type *XTrusted Platform Module (TPM)Image: Comparison of SSDS (TransFlash), MicroSDHCCompatible memory cardsMicroSD (TransFlash), MicroSDHCOperating temperature (T-T)0 - 35 °CDiscrete graphics card memory8 GBOperating relative humidity (H-H)0 - 90%Discrete graphics card memory typeGDDR6Storage relative humidity (H-H)0 - 95%On-board graphics card *Image: Comparison of Storage relative humidity (H-H)0 - 95%On-board graphics card familyIntel Arc GraphicsNon-operating altitude-15.2 - 3048 mOn-board graphics card familyIntel Arc GraphicsNon-operating shock110 GOn-board graphics card familyIntel Arc GraphicsNon-operating shock160 GOn-board graphics card familyIntel Arc GraphicsNon-operating shock160 GOn-board graphics card familyIntel Arc GraphicsNon-operating shock160 GOn-board graphics card familyIntel Arc GraphicsNon-operating shortImage: Comparison of C	Total SSDs capacity	1 TB		
SSD capacity1 TBUSB charging voltage5,20 VSSD iterfacePCI Express 4.0SecuritySecurityNVMe✓Cable lock slot✓SSD form factorM.2Cable lock slot typeWedgeSSD performance classØCable lock slot typeWedgeM.2 SSD size2280 (22 x 80 mm)Smart card reader✓Optical drive type *✓Trusted Platform Module (TPM)✓Card reader integrated✓Trusted Platform Module (TPM)2.0Compatible memory cardsMicroSD (TransFlash), MicroSDHC, MicroSDXCOperating temperature (T-T)0 - 35 °CDiscrete graphics card model *NVIDIA RTX 2000 AdaStorage temperature (T-T)40 - 65 °CDiscrete graphics card memory typeGDDR6Storage relative humidity (H-H)10 - 90%On-board graphics card *✓Operating altitude-15.2 - 3048 mOn-board GPU manufacturerIntelNon-operating shock110 GOn-board graphics card *✓Operating shock100 GOn-board graphics card *✓Non-operating shock100 GOn-board graphics card familyIntel Arc GraphicsNon-operating shock106 GOn-board graphics card familyIntel Arc GraphicsNon-operating vibration0.66 GOn-board graphics card familyIntel Arc GraphicsNon-operating vibration3.3 G	Number of SSDs installed	1		
SSD interfacePCI Express 4.0SecurityNVMe✓SecuritySSD form factorM.2Cable lock slotSSD performance class40Cable lock slot typeWedgeM.2 SSD size2280 (22 x 80 mm)Smart card reader✓Optical drive type*XTrusted Platform Module (TPM)✓Card reader integrated✓Trusted Platform Module (TPM)2.0Compatible memory cardsMicroSD (TransFlash), MicroSDHC, MicroSDXCOperating temperature (T-T)0 - 35 °CDiscrete graphics card model *NVIDIA RTX 2000 AdaStorage temperature (T-T)0 - 35 °CDiscrete graphics card memory typeGDDR6Storage relative humidity (H-H)10 - 90%On-board graphics card *✓Operating altitude-15.2 - 3048 mOn-board GPU manufacturerIntelNon-operating altitude-15.2 - 10668 mDiscrete graphics card *✓Operating shock110 GOn-board graphics card familyIntel Arc GraphicsNon-operating shock160 GOn-board graphics card familyIntel Arc GraphicsNon-operating vibration0.66 GAudioNon-operating vibration0.66 GNon-operating vibration1.3 G	SSD capacity			
SND orM.2Cable lock slot✓SSD performance class40Cable lock slot typeWedgeM.2 SSD size2280 (22 x 80 mm)Smart card reader✓Optical drive type *XTrusted Platform Module (TPM)✓Card reader integrated✓Trusted Platform Module (TPM)✓Compatible memory cardsMicroSD (TransFlash), MicroSDHC, MicroSDXCTrusted Platform Module (TPM)2.0 <b>Operating temperature</b> (T-T)0 - 35 °CDiscrete graphics card model *NVIDIA RTX 2000 AdaStorage temperature (T-T)-40 - 65 °CDiscrete graphics card memory8 GBOperating relative humidity (H-H)10 - 90%Discrete graphics card *✓Operating altitude-15.2 - 3048 mOn-board graphics card *✓Operating shock110 GOn-board graphics card familyIntel Arc GraphicsNon-operating shock160 GOn-board graphics card model *Intel Arc GraphicsNon-operating vibration0.66 GAudioNon-operating vibration1.3 G		•	5 5 5	
SSD performance class40Cable lock slot typeWedgeM.2 SSD size2280 (22 x 80 mm)Smart card readerOptical drive type *XTrusted Platform Module (TPM)Card reader integratedTrusted Platform Module (TPM)2.0Compatible memory cardsMicroSD (TransFlash), MicroSDHC)Operational conditionsGraphicsMicroSD XCOperating engraver (T-T)0.35 °CDiscrete graphics card model *NVIDIA RTX 2000 AdaStorage temperature (T-T).40 - 65 °CDiscrete graphics card memory8 GBOperating relative humidity (H-H)10.90%On-board GPU manufacturerIntelStorage memory altitude.15.2 - 3048 mOn-board Graphics card *Operating shock110 GOn-board graphics card familyIntel Arc GraphicsNon-operating shock10.6GOn-board graphics card familyIntel Arc GraphicsOperating vibration.66.6GAucioNon-operating vibration.3.6				,
M.2 SSD size   2280 (22 x 80 mm)   Smart card reader   Image: Card reader integrated     Optical drive type *   Image: Card reader integrated   Image: Card reader integrateder integr				
Optical drive type * Card reader integratedXTrusted Platform Module (TPM) Trusted Platform Module (TPM) 2.0Compatible memory cardsMicroSD (TransFlash), MicroSDHC MicroSDXCTrusted Platform Module (TPM) version2.0GraphicsMicroSD (TransFlash), MicroSDHC MicroSDXCOperating temperature (T-T) Operating temperature (T-T)0 - 35 °CDiscrete graphics card model *NVIDIA RTX 2000 AdaStorage temperature (T-T) Operating relative humidity (H-H)10 - 90%Discrete graphics card memory8 GBOperating relative humidity (H-H) Operating altitude0 - 95%On-board graphics card *Operating altitude Operating altitude-15.2 - 3048 mOn-board GPU manufacturerIntelNon-operating shock110 GGOn-board graphics card *Operating shock160 GOn-board graphics card model *Intel Arc GraphicsNon-operating shock160 GOn-board graphics card model *Intel Arc GraphicsNon-operating vibration0.66 GAudio </td <td></td> <td></td> <td></td> <td></td>				
Card reader integrated Compatible memory cardsImage: Compatible mem				
Compatible memory cardsMicroSD (TransFlash), MicroSDHC, MicroSDXCVersionGraphicsOperational conditionsDiscrete graphics card model *NVIDIA RTX 2000 AdaStorage temperature (T-T)0 - 35 °CDiscrete graphics card memory8 GBOperating relative humidity (H-H)10 - 90%Discrete graphics memory typeGDDR6Storage relative humidity (H-H)0 - 95%On-board GPU manufacturerIntelNon-operating altitude-15.2 - 3048 mDiscrete graphics card *<				
Operational conditionsGraphicsOperating temperature (T-T)0 - 35 °CDiscrete graphics card model *NVIDIA RTX 2000 AdaStorage temperature (T-T)-40 - 65 °CDiscrete graphics card memory8 GBOperating relative humidity (H-H)10 - 90%Discrete graphics memory typeGDDR6Storage relative humidity (H-H)0 - 95%On-board graphics card *Operating altitude-15.2 - 3048 mOn-board GPU manufacturerIntelNon-operating altitude-15.2 - 10668 mDiscrete graphics card *Operating shock110 GOn-board graphics card familyIntel Arc GraphicsNon-operating shock160 GOn-board graphics card model *Intel Arc GraphicsOperating vibration0.66 GAudioNon-operating vibration1.3 G	Compatible memory cards			2.0
Discrete graphics card model *NVIDIA RTX 2000 AdaStorage temperature (T-T)-40 - 65 °CDiscrete graphics card memory8 GBOperating relative humidity (H-H)10 - 90%Discrete graphics memory typeGDDR6Storage relative humidity (H-H)0 - 95%On-board graphics card *IntelOperating altitude-15.2 - 3048 mOn-board GPU manufacturerIntelNon-operating altitude-15.2 - 10668 mDiscrete graphics card *Intel Arc GraphicsNon-operating shock110 GOn-board graphics card familyIntel Arc GraphicsOperating vibration0.66 GOn-board graphics card model *Intel Arc GraphicsOperating vibration1.3 G	Graphics			0 - 35 °C
Discrete graphics card memory8 GBOperating relative humidity (H-H)10 - 90%Discrete graphics memory typeGDDR6Storage relative humidity (H-H)0 - 95%On-board graphics card *IntelOperating altitude-15.2 - 3048 mOn-board GPU manufacturerIntelNon-operating altitude-15.2 - 10668 mDiscrete graphics card *Intel Arc GraphicsOperating shock110 GOn-board graphics card familyIntel Arc GraphicsNon-operating shock160 GOn-board graphics card model *Intel Arc GraphicsOperating vibration0.66 GAudioNon-operating vibration1.3 G		NVIDIA RTX 2000 Ada		
Discrete graphics memory typeGDDR6Storage relative humidity (H-H)0 - 95%On-board graphics card *✓Operating altitude-15.2 - 3048 mOn-board GPU manufacturerIntelNon-operating altitude-15.2 - 10668 mDiscrete graphics card *✓Operating shock110 GOn-board graphics card familyIntel Arc GraphicsNon-operating shock160 GOn-board graphics card model *Intel Arc GraphicsOperating vibration0.66 GAudioNon-operating vibration1.3 G				
On-board graphics card *Image: Marking and the second				
Discrete graphics card *Image: A constraint of the constrai				
On-board graphics card familyIntel Arc GraphicsNon-operating shock160 GOn-board graphics card model *Intel Arc GraphicsOperating vibration0.66 GAudioNon-operating vibration1.3 G	On-board GPU manufacturer	Intel	Non-operating altitude	-15.2 - 10668 m
On-board graphics card model *   Intel Arc Graphics   Operating vibration   0.66 G     Audio   Non-operating vibration   1.3 G	5 1			
Audio Non-operating vibration 1.3 G			, -	
	On-board graphics card model *	Intel Arc Graphics		
Number of built-in speakers 2	Audio		Non-operating vibration	1.5 6
	Number of built-in speakers	2		

Audio		Sustainability	
Speakers manufacturer Speaker power Built-in microphone	Waves 2 W ✓	Sustainability compliance Sustainability certificates	✓ ENERGY STAR, TCO
		Weight & dimensions	
		Width	357.8 mm
		Depth	233.3 mm
		Height (front)	2.27 cm
		Height (rear)	2.47 cm
		Weight *	1.79 kg
		Packaging content	
		Cables included	AC



5397184807507

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.