



## SPECIFICATIONS

<b>Model Name</b>	B650M PROJECT ZERO
<b>CPU Support</b>	Supports AMD Ryzen™ 8000 / 7000 Series Desktop Processors
<b>CPU Socket</b>	Socket AM5
<b>Chipset</b>	AMD B650 Chipset
<b>Graphics Interface</b>	1x PCIe 4.0 x16 slot, 1x PCIe 3.0 x1 slot
<b>Display Interface</b>	Support 4K@60Hz as specified in HDMI 2.1, DisplayPort 1.4 - Requires Processor Graphics
<b>Memory Support</b>	4 DIMMs, Dual Channel DDR5-7600+ (OC)
<b>Storage</b>	2x M.2 Gen4 x4 64Gbps slots 4x SATA 6Gbps ports
<b>USB ports</b>	1x USB 3.2 Gen 2x2 20Gbps (Type-C) 5x USB 3.2 Gen 2 10Gbps (3 Type-C + 2 Type-A) 3x USB 3.2 Gen 1 5Gbps (4 Type-A) 6x USB 2.0
<b>LAN</b>	1x Realtek® 8125BG 2.5Gbps LAN
<b>Wireless / Bluetooth</b>	AMD Wi-Fi 6E, Bluetooth 5.3
<b>Audio</b>	8-Channel (7.1) HD Audio with Audio Boost

## FEATURES



### Back-Connect Design

Move the connectors to the back to provide a cleaner and neater front view and significantly reduces the difficulty of cable management.



### Extended Heatsink Design

MSI extended PWM heatsink and enhanced circuit design ensures even high-end processors to run in full speed.



### Latest DDR5 Memory

A huge step of DDR performance enhancement with the latest DDR5 memory and MSI Memory Boost technology.



### Lightning Gen4 Solution

The latest Gen4 PCI-E and M.2 solution with up to 64GB/s bandwidth for maximum transfer speed.



### M.2 Shield FROZR

M.2 thermal accessory keeps M.2 SSDs safe while preventing throttling, making them run faster.



### Wi-Fi 6E

The latest wireless solution supports 6GHz spectrum, MU-MIMO and BSS color technology, delivering speeds up to 2400Mbps.



### 2.5G Network Solution

Featuring premium 2.5G LAN to deliver better network experience.



### Lightning USB 20G


Built-in USB 3.2 Gen 2x2 port, offers 20Gbps transmission speed, 4X faster than USB 3.2 Gen 1.



### Memory Boost

Advanced technology to deliver pure data signals for the best performance, stability and compatibility.

## CONNECTIONS

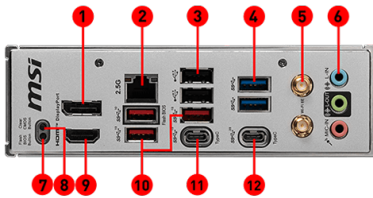

- |                                 |                                   |
|---------------------------------|-----------------------------------|
| 1. DisplayPort 1.4              | 2. 2.5G LAN Port                  |
| 3. USB 2.0 Port                 | 4. USB 3.2 Gen 1 5Gbps Type-A     |
| 5. Wi-Fi / Bluetooth Antenna    | 6. Audio Connectors               |
| 7. Flash BIOS Button            | 8. Clear CMOS Button              |
| 9. HDMI 2.1 Port                | 10. USB 3.2 Gen 2 10Gbps Type-A   |
| 11. USB 3.2 Gen 2 10Gbps Type-C | 12. USB 3.2 Gen 2x2 20Gbps Type-C |