



TC7X Series Technical Accessory Guide



Note: TC70/TC75 Android configurations discontinued 2/2020 - see PMB 10263
 TC70X Windows 10 configurations discontinued 6/2018 - see PMB 3120

NOTE: This document is only for general reference. Solutions Pathway and related PMBs should be used for product availability, pricing, and final solution selection.

* Zebra does not endorse or specifically recommend any **third-party products, accessories, or hardware**. ZEBRA DISCLAIMS ANY AND ALL LIABILITY, INCLUDING ANY EXPRESS OR IMPLIED WARRANTIES, WHETHER ORAL OR WRITTEN, FOR SUCH THIRD PARTY PRODUCTS, ACCESSORIES, OR HARDWARE. THE CUSTOMER ACKNOWLEDGES THAT NO REPRESENTATION HAS BEEN MADE BY ZEBRA AS TO THE FITNESS OF THE THIRD-PARTY PRODUCTS, ACCESSORIES, OR HARDWARE FOR THE CUSTOMER'S INTENDED PURPOSE.

Cradles and Charging

Cradles

Part Number	Picture	Description	Notes	Required Items
CRD-TC7X-SE2CPP-01		2-Slot Charge-Only ShareCradle (for all TC7X series)	<ul style="list-style-type: none"> ▶ Supports charging of spare Power Precision+ batteries used with TC70x/TC75x and later series. Blue dot/label on cradle distinguishes from TC70/TC75 cradle (CRD-TC7X-SE2CU1-01). ▶ Will also support charging of TC70/TC75 series batteries (non-Power Precision+). ▶ Will charge both TC7X with 1X battery and one spare 1X battery ▶ Compatible with TC7X with a hand strap and Stylus attached ▶ Also compatible with Snap-On accessories attached (e.g. MSR, Trigger Handle etc...) ▶ Connects to charging connectors on bottom of TC7X for charging 	<ul style="list-style-type: none"> ▶ Power Supply (PWR-BGA12V50W0WWW) ▶ DC Line Cord (CBL-DC-388A1-01) ▶ AC Line Cord (23844-00-00R).
CRD-TC7X-SE2CU1-01		2-Slot Charge-Only ShareCradle (for TC70/TC75 series only)	<ul style="list-style-type: none"> ▶ Discontinued 12/2016, now use CRD-TC7X-SE2CPP-01 - see PMB 2908 ▶ Spare battery charging slot is NOT compatible with TC70x/TC75x and later Power Precision+ batteries. Use CRD-TC7X-SE2CPP-01 instead. Cradle will display error message if a TC70x/TC75x or later Power Precision+ battery is inserted and may cause damage to battery (see PMB 2863). ▶ Will charge both TC7X with 1X battery and one spare 1X battery ▶ Compatible with TC7X with a hand strap and Stylus attached ▶ Also compatible with Snap-On accessories attached (e.g. MSR, Trigger Handle etc...) ▶ Connects to charging connectors on bottom of TC7X for charging 	<ul style="list-style-type: none"> ▶ Power Supply (PWR-BGA12V50W0WWW) ▶ DC Line Cord (CBL-DC-388A1-01) ▶ AC Line Cord (23844-00-00R).

<p>CRD-TC7X-SGL (kit includes US AC Line Cord, 23844-00-00R)</p> <p>CRD2SLOT-CLS-TC7XE (kit includes Australia AC Line Cord, 50-16000-217R)</p>		<p>2-Slot Charge-Only ShareCradle Kit (for all TC7X series)</p>	<ul style="list-style-type: none"> ▶ Supports charging of spare Power Precision+ batteries used with TC70x/TC75x and later series. Blue dot/label on cradle distinguishes from TC70/TC75 cradle (CRD-TC7X-SE2CU1-01). ▶ Will also support charging of TC70/TC75 series batteries (non-Power Precision+). ▶ Will charge both TC7X with 1X battery and one spare 1X battery ▶ Compatible with TC7X with a hand strap and Stylus attached ▶ Also compatible with Snap-On accessories attached (e.g. MSR, Trigger Handle etc...) ▶ Connects to charging connectors on bottom of TC7X for charging. ▶ Kit includes 2-Slot Cradle (CRD-TC7X-SE2CPP-01), Power Supply (PWR-BGA12V50W0WWW), DC Line Cord (CBL-DC-388A1-01) and AC Line Cord (varies by SKU). ▶ NOTE: This is a custom product. Please work with your Zebra representative to open a Custom Product Request (CPR) if you would like to order this item. 	
<p>CRD-TC7X-SE1CO-01</p>		<p>Single Slot Charge-Only ShareCradle</p>	<ul style="list-style-type: none"> ▶ Will charge TC7x only. Does not charge spare battery. ▶ Compatible with TC7X with a hand strap and Stylus attached ▶ Also compatible with Snap-On accessories attached (e.g. MSR, Trigger Handle etc...) ▶ Connects to charging connectors on bottom of TC7X for charging. ▶ NOTE: This is a custom product. Please work with your Zebra representative to open a Custom Product Request (CPR) if you would like to order this item. 	<ul style="list-style-type: none"> ▶ Power Supply (PWR-BGA12V50W0WWW) ▶ DC Line Cord (CBL-DC-388A1-01) ▶ AC Line Cord (23844-00-00R).
<p>CRD-TC7X-SE2CU2-02</p>		<p>2-Slot Charge-Only ShareCradle</p>	<ul style="list-style-type: none"> ▶ Will charge two TC7x units. Does not charge spare battery. ▶ Compatible with TC7X with a hand strap and Stylus attached ▶ Also compatible with Snap-On accessories attached (e.g. MSR, Trigger Handle etc...) ▶ Connects to charging connectors on bottom of TC7X for charging. ▶ NOTE: This is a custom product. Please work with your Zebra representative to open a Custom Product Request (CPR) if you would like to order this item. 	<ul style="list-style-type: none"> ▶ Power Supply (PWR-BGA12V50W0WWW) ▶ DC Line Cord (CBL-DC-388A1-01) ▶ AC Line Cord (23844-00-00R).
<p>CRD-TC7X-SE2NTT-01</p>		<p>TC7X/ZQ300 series Charge-Only ShareCradle</p>	<ul style="list-style-type: none"> ▶ Will charge one TC7x and one ZQ300 series printer. ▶ Compatible with TC7X with a hand strap and Stylus attached ▶ Also compatible with Snap-On accessories attached (e.g. MSR, Trigger Handle etc...) ▶ Connects to charging connectors on bottom of TC7X for charging. ▶ NOTE: This is a custom product. Please work with your Zebra representative to open a Custom Product Request (CPR) if you would like to order this item. 	<ul style="list-style-type: none"> ▶ Power Supply (PWR-BGA12V50W0WWW) ▶ DC Line Cord (CBL-DC-388A1-01) ▶ AC Line Cord (23844-00-00R).



<p>CRD-TC7X-SE2EPP-01</p>		<p>2-Slot USB/Ethernet/Charging ShareCradle (for all TC7X series)</p>	<ul style="list-style-type: none"> ▶ Supports charging of spare Power Precision+ batteries used with TC70x/TC75x and later series. Blue dot/label on cradle distinguishes from TC70/TC75 cradle (CRD-TC7X-SE2EU1-01). ▶ Will also support charging of TC70/TC75 series batteries (non-Power Precision+). ▶ Will charge both TC7X with 1X battery and one spare 1X battery ▶ Compatible with TC7X with a hand strap and Stylus attached ▶ NOT compatible with Snap-On accessories attached (e.g. MSR, Trigger Handle etc...) ▶ Connects to communication port on back side of TC7X for communications and charging. ▶ USB to Ethernet Module (MOD-MT2-EU1-01) integrated into the bottom of the cradle ▶ Mechanical switch selects between USB B port and RJ45 Ethernet jack. ▶ 10/100/1000 Mbps speed ▶ LEDs on module indicate connectivity and speed. 	<ul style="list-style-type: none"> ▶ Power Supply (PWR-BGA12V50W0WW) ▶ DC Line Cord (CBL-DC-388A1-01) ▶ AC Line Cord (23844-00-00R). ▶ USB Cable (25-124330-01R) for PC connection
<p>CRD-TC7X-SE2EU1-01</p>		<p>2-Slot USB/Ethernet/Charging ShareCradle (for TC70/TC75 series only)</p>	<ul style="list-style-type: none"> ▶ Discontinued 12/2016, now use CRD-TC7X-SE2EPP-01 - see PMB 2908 ▶ Spare battery charging slot is NOT compatible with TC70x/TC75x and later Power Precision+ batteries. Use CRD-TC7X-SE2EPP-01 instead. Cradle will display error message if a TC70x/TC75x and later Power Precision+ battery is inserted and may cause damage to battery (see PMB 2863). ▶ Will charge both TC7X with 1X battery and one spare 1X battery ▶ Compatible with TC7X with a hand strap and Stylus attached ▶ NOT compatible with Snap-On accessories attached (e.g. MSR, Trigger Handle etc...) ▶ Connects to communication port on back side of TC7X for communications and charging. ▶ USB to Ethernet Module (MOD-MT2-EU1-01) integrated into the bottom of the cradle ▶ Mechanical switch selects between USB B port and RJ45 Ethernet jack. ▶ 10/100/1000 Mbps speed ▶ LEDs on module indicate connectivity and speed. 	<ul style="list-style-type: none"> ▶ Power Supply (PWR-BGA12V50W0WW) ▶ DC Line Cord (CBL-DC-388A1-01) ▶ AC Line Cord (23844-00-00R). ▶ USB Cable (25-124330-01R) for PC connection




<p>KT-CRDT7X2E-01</p>		<p>2-Slot USB/Ethernet/Charging ShareCradle KIT (for all TC7X series)</p>	<ul style="list-style-type: none"> ▶ Supports charging of spare Power Precision+ batteries used with TC70x/TC75x and later series. Blue dot/label on cradle distinguishes from TC70/TC75 cradle (CRD-TC7X-SE2EU1-01). ▶ Will also support charging of TC70/TC75 series batteries (non-Power Precision+). ▶ Will charge both TC7X with 1X battery and one spare 1X battery ▶ Compatible with TC7X with a hand strap and Stylus attached ▶ NOT compatible with Snap-On accessories attached (e.g. MSR, Trigger Handle etc...) ▶ Connects to communication port on back side of TC7X for communications and charging. ▶ USB to Ethernet Module (MOD-MT2-EU1-01) integrated into the bottom of the cradle ▶ Mechanical switch selects between USB B port and RJ45 Ethernet jack. ▶ 10/100/1000 Mbps speed ▶ LEDs on module indicate connectivity and speed. ▶ Kit includes Ethernet Cradle (CRD-TC7X-SE2EPP-01), Power Supply (PWR-BGA12V50W0WW), DC Line Cord (CBL-DC-388A1-01) and AC Line Cord (23844-00-00R). 	<ul style="list-style-type: none"> ▶ USB Cable (25-124330-01R) for PC connection
<p>CRD-TC7X-SE2CO1-01</p>		<p>2-Slot ShareCradle - USB/Ethernet/Charging and Charge-Only</p>	<ul style="list-style-type: none"> ▶ Provides USB/Ethernet and Charging in left cradle slot and Charge-Only in right cradle slot. ▶ Compatible with TC7X with a hand strap and Stylus attached ▶ Left cradle slot NOT compatible with Snap-On accessories attached (e.g. MSR, Trigger Handle etc...) ▶ Left cradle slot connects to communication port on back side of TC7X for communications and charging. ▶ Right cradle slot connects to charging connectors on bottom of TC7X. ▶ USB to Ethernet Module (MOD-MT2-EU1-01) integrated into the bottom of the cradle ▶ Mechanical switch selects between USB B port and RJ45 Ethernet jack. ▶ 10/100/1000 Mbps speed ▶ LEDs on module indicate connectivity and speed. ▶ NOTE: This is a custom product. Please work with your Zebra representative to open a Custom Product Request (CPR) if you would like to order this item. 	<ul style="list-style-type: none"> ▶ Power Supply (PWR-BGA12V50W0WW) ▶ DC Line Cord (CBL-DC-388A1-01) ▶ AC Line Cord (23844-00-00R). ▶ USB Cable (25-124330-01R) for PC connection




<p>CRD-TC7X-SE2EPP-02</p>		<p>2-Slot ShareCradle - Ethernet/Charging</p>	<ul style="list-style-type: none"> ▶ Provides Ethernet and Charging on both the left and right cradle slots. ▶ Compatible with TC7X with a hand strap and Stylus attached ▶ NOT compatible with Snap-On accessories attached (e.g. MSR, Trigger Handle etc...) ▶ Connects to communication port on back side of TC7X for Ethernet connection and charging. ▶ 10/100/1000 Mbps speed ▶ LEDs on cradle indicates connectivity and speed. ▶ NOTE: This is a custom product. Please work with your Zebra representative to open a Custom Product Request (CPR) if you would like to order this item. 	<ul style="list-style-type: none"> ▶ Power Supply (PWR-BGA12V50W0WWW) ▶ DC Line Cord (CBL-DC-388A1-01) ▶ AC Line Cord (23844-00-00R).
<p>KT-CRD-TC7X-USPS02</p>		<p>2-Slot ShareCradle KIT - Ethernet/Charging</p>	<ul style="list-style-type: none"> ▶ Provides Ethernet and Charging on both the left and right cradle slots. ▶ Compatible with TC7X with a hand strap and Stylus attached ▶ NOT compatible with Snap-On accessories attached (e.g. MSR, Trigger Handle etc...) ▶ Connects to communication port on back side of TC7X for communications and charging. ▶ USB to Ethernet Module (MOD-MT2-EU1-01) integrated into the bottom of the cradle ▶ Mechanical switch selects between USB B port and RJ45 Ethernet jack. ▶ 10/100/1000 Mbps speed ▶ LEDs on module indicate connectivity and speed. ▶ Kit includes: 2-Slot Ethernet ShareCradle (CRD-TC7X-SE2EPP-02), Power Supply (PWR-BGA12V50W0WWW), DC Line Cord (CBL-DC-388A1-01) and AC Line Cord (23844-00-00R). ▶ NOTE: This is a custom product. Please work with your Zebra representative to open a Custom Product Request (CPR) if you would like to order this item. 	
<p>MOD-MT2-EU1-01</p>		<p>USB to Ethernet Module</p>	<ul style="list-style-type: none"> ▶ Attaches to 2-Slot USB/Charging ShareCradle (CRD-TC7X-SE2EU1-01) to provide Ethernet support ▶ Mechanical switch selects between USB B port and RJ45 Ethernet jack. ▶ 10/100/1000 Mbps speed ▶ LEDs on module indicate connectivity and speed. ▶ Already pre-installed on Ethernet Cradle (CRD-TC7X-SE2EU1-01). This would be a spare module if ordered for the TC7X. 	<p>2-Slot USB/Charging ShareCradle (CRD-TC7X-SE2EU1-01)</p>




<p>CRD-TC7X-1SWS1-01</p>		<p>Workstation Docking Cradle</p>	<ul style="list-style-type: none"> ▶ An enhanced single-slot charging cradle allowing users to use the TC72/TC77 as a workstation or kiosk. ▶ Cradle includes the following additional ports: <ul style="list-style-type: none"> - HDMI - Ethernet - 4 USB ports for keyboard, mouse, and other supported USB devices. ▶ Two USB ports are located on both sides of cradle. One port provides 1.5A current. The remaining three provide .5A current. ▶ Also includes Kensington port to secure the cradle to a desk/location. Cradle can also be screwed down to desk/counter. ▶ Will charge TC7X only. Does not charge spare battery. ▶ Only compatible with TC72/TC77 devices. Not compatible with older generation TC7X units. 	<ul style="list-style-type: none"> ▶ Power Supply (PWR-BGA12V50W0WWW) ▶ DC Line Cord (CBL-DC-388A1-01) ▶ AC Line Cord (23844-00-00R).
<p>MNT-TC7X-WM</p>		<p>Charge-Only Cradle Kit for inverted operations</p>	<ul style="list-style-type: none"> ▶ Extends the use of the TC7x as a fixed scanner. ▶ Often used in Pharmacy operations. ▶ Firmly holds the TC7x in a downward facing direction with a range of motion allowing scanning angle to be adjusted. ▶ Connects to rugged charge connector on bottom of TC7x. ▶ Kit includes Charge-Only Vehicle Cradle (CRD-TC7X-CVCD1-01), RAM Suction Cup Mount (RAM-B-166U), Power Supply (PWR-BGA12V50W0WWW), DC Line Cord (CBL-DC-388A1-01), and AC Line Cord (23844-00-00R). ▶ NOTE: This is a custom product. Please work with your Zebra representative to open a Custom Product Request (CPR) if you would like to order this item. 	
<p>PSCTC7X-SCAN (3rd party) *</p> <p>http://www.portsmith.com</p>		<p>Portsmith ScanStand Charge-Only Cradle Kit</p>	<ul style="list-style-type: none"> ▶ Extends the use of the TC7x as a fixed scanner. ▶ Firmly holds the TC7x in a downward facing direction with a range of motion allowing scanning angle to be adjusted. ▶ Ruggedly made for enterprise use. ▶ Connects to rugged charge connector on bottom of TC7x. ▶ Kit includes Cradle and power supply. 	


<p>PSDTC70-01 (3rd party) *</p> <p>http://www.portsmith.com</p>		<p>Portsmith Single Slot Charge-Only Cradle Kit</p>	<ul style="list-style-type: none"> ▶ Discontinued ▶ Durable cradle design for enterprise use ▶ 5VDC, 2A power to slot ▶ Kit contains: <ul style="list-style-type: none"> - Portsmith Single slot cradle - Power supply for international use. 	
<p>PSDTC70-01-BT (3rd party) *</p> <p>http://www.portsmith.com</p>		<p>Portsmith Single Slot Ethernet Charging Cradle Kit</p>	<ul style="list-style-type: none"> ▶ Discontinued ▶ Durable cradle design for enterprise use ▶ 5VDC, 2A power to slot ▶ Bluetooth to Ethernet connectivity ▶ Up to 5 concurrent Bluetooth connections w/ unlimited pairing. ▶ Bluetooth SIG certified ▶ Kit contains: <ul style="list-style-type: none"> - Portsmith Single slot cradle - Portsmith Bluetooth adaptor (PSA5BT1E) - Power supply for international use - Power splitter cord to power both cradle and Bluetooth adapter from a single power supply 	
<p>CRD-TC7X-SE5C1-01</p>		<p>5-Slot Charge-Only ShareCradle</p>	<ul style="list-style-type: none"> ▶ Will charge up to five TC7X units ▶ Compatible with TC7X with a hand strap and Stylus attached ▶ Also compatible with Snap-On accessories attached (e.g. MSR, Trigger Handle etc...) ▶ Can accommodate either five TC7Xs or four TC7Xs and one 4-Slot Spare Battery Charger ▶ Can be racked/ mounted in a standard 19inch rack system via the mounting accessory ▶ Connects to charging connectors on bottom of TC7X for charging 	<ul style="list-style-type: none"> ▶ DC Line Cord (CBL-DC-382A1-01) and Power Supply (PWR-BGA12V108W0WW) ▶ AC Line Cord (23844-00-00F)

<p>CRD-TC7X-SE5C-KT2 (include US AC Line Cord, 23844-00-00R)</p> <p>CRD5SLOT-CLS-TC7XC (includes Australia AC Line Cord, 50-16000-217R)</p>		<p>5-Slot Charge-Only ShareCradle Kit</p>	<ul style="list-style-type: none"> ▶ Will charge up to five TC7X units ▶ Compatible with TC7X with a hand strap and Stylus attached ▶ Also compatible with Snap-On accessories attached (e.g. MSR, Trigger Handle etc...) ▶ Can accommodate either five TC7Xs or four TC7Xs and one 4-Slot Spare Battery Charger ▶ Can be racked/ mounted in a standard 19inch rack system via the mounting accessory ▶ Connects to charging connectors on bottom of TC7X for charging ▶ Kit includes 5-Slot Charge-Only ShareCradle (CRD-TC7X-SE5C1-01), DC Line Cord (CBL-DC-381A1-01), Power Supply (PWR-BGA12V108W0WWW), and AC Line Cord (varies by SKU) ▶ NOTE: This is a custom product. Please work with your Zebra representative to open a Custom Product Request (CPR) if you would like to order this item. 	
<p>CRD-TC7X-SE5KT1-01</p>		<p>4-Slot Charge-Only ShareCradle with Spare Battery Charging slot</p>	<ul style="list-style-type: none"> ▶ Will charge up to four TC7X units and four spare batteries ▶ Compatible with TC7X with a hand strap and Stylus attached ▶ Also compatible with Snap-On accessories attached (e.g. MSR, Trigger Handle etc...) ▶ Can be racked/ mounted in a standard 19inch rack system via the mounting accessory ▶ Connects to charging connectors on bottom of TC7X for charging ▶ Includes 5-Slot Charge-Only ShareCradle (CRD-TC7X-SE5C1-01) with four TC7X slots and ShareCradle 4-Slot Battery Charger Adapter Cup (CUP-SE-BTYADP1-01) ▶ NOTE: Only one TC7X 4-Slot Battery Charger (SAC-TC7X-4BTYPP-01) can be installed on the 5-Slot ShareCradle. Charger is installed on left most slot on ShareCradle. 	<ul style="list-style-type: none"> ▶ DC Line Cord (CBL-DC-382A1-01) and Power Supply (PWR-BGA12V108W0WWW) ▶ AC Line Cord (23844-00-00R) ▶ 4-Slot Battery Charger (SAC-TC7X-4BTYPP-01)



<p>CRD-TC7X-5C4B-KT1</p>		<p>4-Slot Charge-Only ShareCradle with Spare Battery Charging Kit (US)</p>	<ul style="list-style-type: none"> ▶ Will charge up to four TC7X units and four spare batteries ▶ Compatible with TC7X with a hand strap and Stylus attached ▶ Also compatible with Snap-On accessories attached (e.g. MSR, Trigger Handle etc...) ▶ Can be racked/ mounted in a standard 19inch rack system via the mounting accessory ▶ Connects to charging connectors on bottom of TC7X for charging ▶ Kit includes 5-Slot Charge-Only ShareCradle with Spare Battery Charging (CRD-TC7X-SE5KT1-01), 4-Slot Battery Charger (SAC-TC7X-4BTYPP-01), Battery Charger Cradle Adapter Cup (CUP-SE-BTYADP1-01), DC Line Cord (CBL-DC-381A1-01), Power Supply (PWR-BGA12V108W0WW), and AC Line Cord (23844-00-00R) ▶ NOTE: Only one TC7X 4-Slot Battery Charger (SAC-TC7X-4BTYPP-01) can be installed on the 5-Slot ShareCradle. Charger is installed on left most slot on ShareCradle. ▶ NOTE: This is a custom product. Please work with your Zebra representative to open a Custom Product Request (CPR) if you would like to order this item. 	
<p>CRD-TC7X-5C4B-UK1</p>		<p>4-Slot Charge-Only ShareCradle with Spare Battery Charging Kit (for UK)</p>	<ul style="list-style-type: none"> ▶ Will charge up to four TC7X units and four spare batteries ▶ Compatible with TC7X with a hand strap and Stylus attached ▶ Also compatible with Snap-On accessories attached (e.g. MSR, Trigger Handle etc...) ▶ Can be racked/ mounted in a standard 19inch rack system via the mounting accessory ▶ Connects to charging connectors on bottom of TC7X for charging ▶ Includes 5-Slot Charge-Only ShareCradle with Spare Battery Charging (CRD-TC7X-SE5KT1-01), 4-Slot Battery Charger (SAC-TC7X-4BTYPP-01), Battery Charger Cradle Adapter Cup (CUP-SE-BTYADP1-01), DC Line Cord (CBL-DC-381A1-01), Power Supply (PWR-BGA12V108W0WW), and AC Line Cord for UK (50-16000-219R) ▶ NOTE: Only one TC7X 4-Slot Battery Charger (SAC-TC7X-4BTYPP-01) can be installed on the 5-Slot ShareCradle. Charger is installed on left most slot on ShareCradle. 	
<p>PSD4TC7X-01 (4-slot cradle)</p> <p>PSD6TC7X-01 (6-slot cradle)</p> <p>PSD8TC7X-01 (8-slot cradle)</p> <p>(3rd party) *</p> <p>http://www.portsmith.com</p>		<p>Portsmouth Multi-Slot Charge-Only Dock Kit</p>	<ul style="list-style-type: none"> ▶ Provides four, six or eight slot options ▶ LED status indicators. ▶ Precision alignment of the handheld into the cradle. ▶ One handed insertion and removal. ▶ Durable powder-coated metal chassis ▶ Injection molded cradles slots. ▶ Safe and regulated power at each cup - 5VDC 2A delivered to each slot. ▶ KIT Includes power supply and line cord for use in North America. 	



<p>PSP5TC75-01 (3rd party) *</p> <p>http://www.portsmith.com</p>		<p>Portsmith 5-Slot Charge-Only Dock</p>	<ul style="list-style-type: none"> ▶ Charges five devices per module from a single power supply. ▶ Durable rugged ABS cradle materials ▶ Precision alignment of the handheld into the cradle ▶ One handed insertion and removable ▶ Safe and regulated power at each cup - 5VDC 2A delivered to each slot ▶ Powder-coated steel chassis ▶ Better space efficiency compared to five individual charging docks ▶ Dimensions: 23" wide, 5" deep, 7" tall ▶ Includes power supply and line cord for use in North America. 	
<p>PSP4TC75-02 (3rd party) *</p> <p>http://www.portsmith.com</p>		<p>Portsmith 4-Slot Charge-Only Dock - for Rack Mounting</p>	<ul style="list-style-type: none"> ▶ Charges four devices per rack module from a single power supply. ▶ Durable rugged ABS cradle materials ▶ Precision alignment of the handheld into the cradle ▶ One handed insertion and removable ▶ Safe and regulated power at each cup - 5VDC 2A delivered to each slot ▶ Powder-coated steel chassis ▶ Mounts in any industry standard server or wall mount rack ▶ 6U or 10.5 inches tall ▶ Includes power supply and line cord for use in North America. 	
<p>CRD-TC7X-SE5EU1-01</p>		<p>5-Slot Ethernet/Charging ShareCradle</p>	<ul style="list-style-type: none"> ▶ Allows speeds up to 1 Gb ▶ Compatible with TC7X with a hand strap and Stylus attached. ▶ NOT compatible with Snap-On accessories attached (e.g. MSR, Trigger Handle etc...). ▶ NOT compatible with TC7X units having Pistol Grip Handle Cleat (ADP-TC7X-CLHTH-10) attached. Use CRD-TC7X-SE5EU1-TR instead. ▶ Can be racked/ mounted in a standard 19inch rack system via the mounting accessory ▶ Connects to communication/ charging port on back of TC7X for charging and communications. 	<ul style="list-style-type: none"> ▶ DC Line Cord (CBL-DC-382A1-01) and Power Supply (PWR-BGA12V108W0WW) ▶ AC Line Cord (23844-00-00F)





<p>KIT-CRD-TC7X-USPS</p>		<p>4-Slot Ethernet/Charging ShareCradle with Spare Battery Charging Kit (US)</p>	<ul style="list-style-type: none"> ▶ Allows speeds up to 1 Gb ▶ Compatible with TC7X with a hand strap and Stylus attached. ▶ NOT compatible with Snap-On accessories attached (e.g. MSR, Trigger Handle etc...). ▶ NOT compatible with TC7X units having Pistol Grip Handle Cleat (ADP-TC7X-CLHTH-10) attached. Use CRD-TC7X-SE5EU1-TR instead. ▶ Can be racked/ mounted in a standard 19inch rack system via the mounting accessory ▶ Connects to communication/ charging port on back of TC7X for charging and communications. ▶ Kit includes 5-Slot Ethernet/Charging ShareCradle (CRD-TC7X-SE5EU1-01), 4-Slot Battery Charger (SAC-TC7X-4BTYP-01), Battery Charger Cradle Adapter Cup (CUP-SE-BTYADP1-01), DC Line Cord (CBL-DC-381A1-01), Power Supply (PWR-BGA12V108W0WW), and AC Line Cord (23844-00-00R) ▶ NOTE: This is a custom product. Please work with your Zebra representative to open a Custom Product Request (CPR) if you would like to order this item. 	
<p>CRD-TC7X-SE5EU1-TR</p>		<p>5-Slot Ethernet/Charging ShareCradle for Pistol Grip Handle devices</p>	<ul style="list-style-type: none"> ▶ Cradle has an additional notch in base accomodating TC7X units with Pistol Grip Handle Cleat (ADP-TC7X-CLHTH-10) attached. ▶ Allows speeds up to 1 Gb ▶ Compatible with TC7X with a hand strap and Stylus attached ▶ NOT compatible with Snap-On accessories attached (e.g. MSR, Trigger Handle etc...) ▶ Can be racked/ mounted in a standard 19inch rack system via the mounting accessory. ▶ Connects to communication/ charging port on back of TC7X for charging and communications. ▶ NOTE: This is a custom product. Please work with your Zebra representative to open a Custom Product Request (CPR) if you would like to order this item. 	<ul style="list-style-type: none"> ▶ DC Line Cord (CBL-DC-382A1-01) and Power Supply (PWR-BGA12V108W0WW) ▶ AC Line Cord (23844-00-00R)
<p>BRKT-SCRD-SMRK-01</p>		<p>5-Slot ShareCradle Mounting Bracket</p>	<ul style="list-style-type: none"> ▶ Allows for rack and wall mounting of one 5-Slot ShareCradle OR up to two 2-Slot Cradles or 4-Slot Battery Chargers. ▶ Bracket can be mounted on standard 19" network rack or on a wall. ▶ Provides cable routing slots and removable power supply tray that stores and conceals power supplies. ▶ Adjustable tabs & screw mounts for easy hanging/installation. ▶ Adjustable orientations: <ul style="list-style-type: none"> - 25° High Density (5-Slot Charge Only Cradle) - Horizontal (5-Slot Ethernet Cradle, Single Slot Cradles, and 4-Slot Battery Chargers). ▶ See the Bluetooth-Generic Accessories TAG for info on 3rd party Network Racks that can be used for mounting this bracket. 	


ADP-TC7X-PLT-FX		5-Slot ShareCradle Mounting Bracket Adapter Plate for Honeywell	<ul style="list-style-type: none"> ▶ Allows Zebra Multi-Slot ShareCradles to be mounted on legacy Honeywell Flex Cradle Wall Mount Brackets (HON SKU #203-641-002). ▶ Includes hardware to attach plate to HON wall bracket and secure ShareCradle to plate. ▶ NOTE: This is a custom product. Please work with your Zebra representative to open a Custom Product Request (CPR) if you would like to order this cable. 	
-----------------	---	---	---	--

Battery Charging

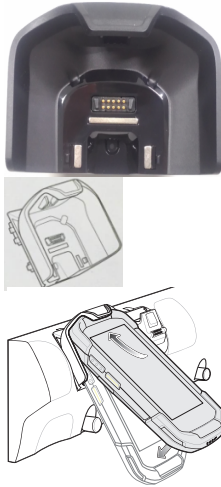


Part Number	Picture	Description	Notes	Required Items
SAC-TC7X-4BTYPP-01		4-Slot Battery Charger (for all TC7X series)	<ul style="list-style-type: none"> ▶ Supports charging of spare Power Precision+ batteries used with TC70x and TC75x series. Blue dot/label on charger distinguishes from TC70/TC75-only charger (SAC-TC7X-4BTYC1-01). ▶ Will also support charging of TC70/TC75 series batteries (non-Power Precision+). ▶ Charges up to four spare batteries only ▶ Can be used standalone or one charger can be installed on the 5-Slot ShareCradle to allow four TC7X units and four spare batteries to be charged simultaneously. Charger will pull power from 5-Slot ShareCradle. 	<p>For Standalone use:</p> <ul style="list-style-type: none"> ▶ Power Supply (PWR-BGA12V50W0VV and CBL-DC-388A1-01) ▶ AC Line Cord (23844-00-00R). <p>For 5-Slot ShareCradle mounting:</p> <ul style="list-style-type: none"> ▶ 5-Slot Charge-Only ShareCradle (CRD-TC7X-SE5C1-01) and ShareCradle 4-Slot Battery Charger Adapter Cup (CUP-SE-BTYADP1-01) OR ▶ 5-Slot Charge-Only ShareCradle with Spare Battery Charging slot (CRD-TC7X-SE5KT1-01)
SAC-TC7X-4BTYC1-01		4-Slot Battery Charger (for TC70/TC75 series only)	<ul style="list-style-type: none"> ▶ Discontinued 12/2016, now use SAC-TC7X-4BTYPP-01 - see PMB 2908 ▶ NOT compatible with TC70x/TC75x Power Precision+ batteries. Use SAC-TC7X-4BTYPP-01 instead. Charger will display error message if a TC70x/TC75x Power Precision+ battery is inserted and may cause damage to battery (see PMB 2863). ▶ Charges up to four spare batteries only ▶ Can be used standalone or one charger can be installed on the 5-Slot ShareCradle to allow four TC7X units and four spare batteries to be charged simultaneously. Charger will pull power from 5-Slot ShareCradle. 	<p>For Standalone use:</p> <ul style="list-style-type: none"> ▶ Power Supply (PWR-BGA12V50W0VV and CBL-DC-388A1-01) ▶ AC Line Cord (23844-00-00R). <p>For 5-Slot ShareCradle mounting:</p> <ul style="list-style-type: none"> ▶ 5-Slot Charge-Only ShareCradle (CRD-TC7X-SE5C1-01) and ShareCradle 4-Slot Battery Charger Adapter Cup (CUP-SE-BTYADP1-01) OR ▶ 5-Slot Charge-Only ShareCradle with Spare Battery Charging slot (CRD-TC7X-SE5KT1-01)






<p>SAC70-WM or KTSAC-TC7X-4BTYPP-01 or KT-TC7X-4BTYPP-USPS (includes US AC Line Cord, 23844-00-00R)</p> <p>SAC-TC7X-CLS-4BTYK (includes Australia AC Line Cord, 50-16000-217R)</p>		<p>4-Slot Battery Charger Kit with AC Line Cord (for all TC7X series)</p>	<ul style="list-style-type: none"> ▶ Supports charging of spare Power Precision+ batteries used with TC70x and TC75x series. Blue dot/label on charger distinguishes from TC70/TC75-only charger (SAC-TC7X-4BTYC1-01). ▶ Will also support charging of TC70/TC75 series batteries (non-Power Precision+). ▶ Charges up to four spare batteries only ▶ Can be used standalone or one charger can be installed on the 5-Slot ShareCradle to allow four TC7X units and four spare batteries to be charged simultaneously. Charger will pull power from 5-Slot ShareCradle. ▶ Kit includes 4-Slot Battery Charger (SAC-TC7X-4BTYPP-01), Power Supply (PWR-BGA12V50W0WW, CBL-DC-388A1-01) and AC Line Cord (varies by SKU). ▶ NOTE: This is a custom product. Please work with your Zebra representative to open a Custom Product Request (CPR) if you would like to order this item. 	
<p>SAC70-WM-INTL</p>		<p>4-Slot Battery Charger Kit (for all TC7X series)</p>	<ul style="list-style-type: none"> ▶ Supports charging of spare Power Precision+ batteries used with TC70x and TC75x series. Blue dot/label on charger distinguishes from TC70/TC75-only charger (SAC-TC7X-4BTYC1-01). ▶ Will also support charging of TC70/TC75 series batteries (non-Power Precision+). ▶ Charges up to four spare batteries only ▶ Can be used standalone or one charger can be installed on the 5-Slot ShareCradle to allow four TC7X units and four spare batteries to be charged simultaneously. Charger will pull power from 5-Slot ShareCradle. ▶ Kit includes 4-Slot Battery Charger (SAC-TC7X-4BTYPP-01), Power Supply (PWR-BGA12V50W0WW and CBL-DC-388A1-01). ▶ NOTE: This is a custom product. Please work with your Zebra representative to open a Custom Product Request (CPR) if you would like to order this item. 	<p>▶ AC Line Cord (23844-00-00R)</p>






CRD-TC7X-20S4BC-01		20-Slot Spare Battery Charger	<ul style="list-style-type: none"> ▶ Supports charging of spare Power Precision+ batteries used with TC70x and TC75x series. Blue dot/label on charger distinguishes from TC70/TC75-only charger (SAC-TC7X-4BTYC1-01). ▶ Will also support charging of TC70/TC75 series batteries (non-Power Precision+). ▶ Uses 5-Slot ShareCradle with five TC7X 4-Slot Battery Chargers attached. ▶ Does NOT support fast-charging of batteries. Batteries will charge from 0-90% in about 5.5 hours. ▶ Can be racked/mounted in a standard 19 inch rack system via the mounting accessory (BRKT-SCRD-SMRK-01). ▶ NOTE: This is a custom product. Please work with your Zebra representative to open a Custom Product Request (CPR) if you would like to order this item. 	<ul style="list-style-type: none"> ▶ Power Supply (PWR-BGA12V108W0WW) ▶ DC Line Cord (CBL-DC-382A1-01) ▶ AC Line Cord (23844-00-00R)
CUP-SE-BTYADP1-01		4-Slot Battery Charger Adapter Cup	<ul style="list-style-type: none"> ▶ Allows for a TC7X 4-Slot Battery Charger (SAC-TC7X-4BTYPP-01 or SAC-TC7X-4BTYC1-01) to be charged and docked on the 5-Slot ShareCradles. ▶ Adapter Cup will pull power from 5-Slot ShareCradle and has pigtail cable to power 4-Slot Battery Charger. ▶ NOTE: Only one TC7X 4-Slot Battery Charger (SAC-TC7X-4BTYPP-01 or SAC-TC7X-4BTYC1-01) can be installed on the 5-Slot ShareCradle. Charger is installed on left most slot on ShareCradle. 	
Direct to Device Charging				
Part Number	Picture	Description	Notes	Required Items
CHG-TC7X-CLA1-02		Charging Cable Cup with Cigarette Lighter Adapter	<ul style="list-style-type: none"> ▶ Provides a smaller footprint for charging TC7X in the vehicle via a cigarette light adapter. ▶ Connects to charge contacts on bottom of TC7X. ▶ Can be used at same time as Snap-on accessories, including Pistol Grip Trigger Handle. ▶ Coiled portion of cable has improved flexibility vs. CHG-TC7X-CLA1-01. 	
CHG-TC7X-CLA1-01		Charging Cable Cup with Cigarette Lighter Adapter	<ul style="list-style-type: none"> ▶ Provides a smaller footprint for charging TC7X in the vehicle via a cigarette light adapter. ▶ Connects to charge contacts on bottom of TC7X. ▶ Can be used at same time as Snap-on accessories, including Pistol Grip Trigger Handle. 	


CHG-TC7X-CBL1-01		Charging Cable Cup	<ul style="list-style-type: none"> ▶ Provides a smaller footprint for charging TC7X ▶ Connects to charge contacts on bottom of TC7X. ▶ Can be used at same time as Snap-on accessories, including Pistol Grip Trigger Handle. 	Power Supply (PWR-BUA5V16W0WW), DC Line Cord (CBL-DC-383A1-01) and AC Line Cord (50-16000-182R) for charging OR Vehicle Charger Cable for Vehicle Cradles/Snap-on Cables and ZQ500/QLn Series Printers (VAM-MPP-VHCH1-01)
------------------	---	--------------------	--	---

MC95 Style Cradles - these cradles are typically used by customers with a mixed install base of MC95 and TC7X devices

Part Number	Picture	Description	Notes	Required Items
ADP-TC7X-REU95-01		MC95 4-Slot Cradle to TC7X Adapter (pack of 8)	<ul style="list-style-type: none"> ▶ Allows TC7X to use existing MC95 4-Slot cradles (4-Slot Charge Only or 4-Slot Charge/Ethernet) ▶ Existing MC95 cup/cleat on the cradle must be removed and replaced with Adapter. ▶ TC70 Windows 10 units only capable of charging via 4-Slot Cradles. All other TC7X configurations capable of supporting both Charging and Ethernet communication. ▶ Allows existing MC95 customers to reuse their installed base of MC95 cradles. ▶ NOTE: SKU is restricted sale. Contact Zebra Product Management with opportunity information to ensure proper training on cradle modification has been met prior to authorizing sale. 	
CRD-TC7X-RECO95-01		MC95 Base - 4-Slot Charge Only Cradle	<ul style="list-style-type: none"> ▶ Uses MC95 4-Slot Charge-Only Cradle base along with four TC7X Adapters (ADP-TC7X-REU95-01). ▶ Charges 4 terminals ▶ Does not charge spare batteries. 	For Desk Mounting: KT-116363-01R For Wall Mounting: KT-116362-01R <ul style="list-style-type: none"> ▶ DC Line Cord (CBL-DC-382A1-01) and Power Supply (PWR-BGA12V108W0WW) ▶ AC Line Cord (23844-00-00F)
CRD-TC7X-REEU95-01		MC95 Base - 4-Slot Ethernet and Charge Cradle	<ul style="list-style-type: none"> ▶ Uses MC95 4-Slot Ethernet Charge Cradle base along with four TC7X Adapters (ADP-TC7X-REU95-01). ▶ Allows Ethernet speeds up to 1 Gb ▶ Charges 4 terminals ▶ Does not charge spare batteries. ▶ TC70 Windows 10 units only capable of charging via 4-Slot Cradles. All other TC7X configurations capable of supporting both Charging and Ethernet communication. 	For Desk Mounting: KT-116363-01R For Wall Mounting: KT-116362-01R <ul style="list-style-type: none"> ▶ DC Line Cord (CBL-DC-382A1-01) and Power Supply (PWR-BGA12V108W0WW) ▶ AC Line Cord (23844-00-00F)



CRDTC7X-F800ER		MC95 Base - 8-Slot Ethernet and Charge Cradle with Stand	<ul style="list-style-type: none"> ▶ Uses two MC95 4-Slot Ethernet Charge Cradle bases along with eight TC7X Adapters (ADP-TC7X-REU95-01). ▶ Cradles are mounted on metal brackets which can sit on a flat surface or can also be mounted to a wall. ▶ Allows Ethernet speeds up to 1 Gb. ▶ Charges 4 terminals ▶ Does not charge spare batteries. ▶ TC70 Windows 10 units only capable of charging via 4-Slot Cradles. All other TC7X configurations capable of supporting both Charging and Ethernet communication. ▶ NOTE: This is a custom product. Please work with your Zebra representative to open a Custom Product Request (CPR) if you would like to order this cradle. 	<ul style="list-style-type: none"> ▶ Two DC Line Cords (CBL-DC-382A1-01) and Power Supplies (PWR-BGA12V108W0WWW) ▶ Two AC Line Cords (23844-00-00R)
KT-116363-01R		Desk Mounting Bracket for 4-Slot Cradles	<ul style="list-style-type: none"> ▶ Discontinued 6/2017 - PMB 2810/2882 ▶ Allows the 4-Bay Charge Only and 4-Bay Ethernet cradles to be placed on a flat surface, such as a desk top. ▶ Bracket hides Power Supply and DC Line Cord ▶ Height: 190 mm (7.48 in.) Width: 456 mm (17.95 in.) Depth: 183 mm (7.20 in.) Weight: 2.5 kg (88.18 oz) 	
KT-116362-01R		Wall Mount Bracket	<ul style="list-style-type: none"> ▶ Discontinued 6/2017 - PMB 2810/2882 ▶ Enables mounting of one 4-Bay Charge Only or 4-Bay Ethernet Cradle on a wall. ▶ Bracket hides Power Supply and DC Line Cord ▶ Height: 123 mm (4.84 in.) Width: 458 mm (18.03 in.) Depth: 72 mm (2.83 in.) Weight: 1.76 kg (62.08 oz) 	
Communication Cables				
Part Number	Picture	Description	Notes	Required Items
25-124330-01R		USB 2-Slot ShareCradle to PC/Host cable	▶ Micro USB connection on cradle end	
CBL-TC7X-USB1-01		Snap-on USB Communication/Charging Cable	<ul style="list-style-type: none"> ▶ Attaches to rear accessory port on TC7X ▶ Can't be used at same time as other Snap-on accessories ▶ Rev C and higher (Q2 2016) and higher no longer block view of rear facing camera. 	Power Supply (PWR-BUA5V16W0WWW), DC Line Cord (CBL-DC-383A1-01) and AC Line Cord (50-16000-182R) for charging OR Vehicle Charger Cable for Vehicle Cradles/Snap-on Cables and ZQ500/QLn Series Printers (VAM-MPP-VHCH1-01)

<p>USB-TC7X-KIT</p>		<p>Snap-on USB Communication/Charging Cable Kit</p>	<ul style="list-style-type: none"> ▶ Attaches to rear accessory port on TC7X ▶ Can't be used at same time as other Snap-on accessories ▶ Rev C and higher (Q2 2016) versions of cable no longer block view of rear facing camera. ▶ Kit includes Snap-on USB Communication/Charging Cable (CBL-TC7X-USB1-01), Power Supply (PWR-BUA5V16W0WW), DC Line Cord (CBL-DC-383A1-01) and AC Line Cord (50-16000-182R). ▶ NOTE: This is a custom product. Please work with your Zebra representative to open a Custom Product Request (CPR) if you would like to order this cable. 	
<p>CBL-TC7X-SERL1-01</p>		<p>Snap-on Serial Communication/Charging Cable</p>	<ul style="list-style-type: none"> ▶ Attaches to rear accessory port on TC7X ▶ Can't be used at same time as other Snap-on accessories ▶ Rev C and higher versions of cable no longer block view of rear facing camera. 	<p>Power Supply (PWR-BUA5V16W0WW), DC Line Cord (CBL-DC-383A1-01) and AC Line Cord (50-16000-182R) for charging OR Vehicle Charger Cable for Vehicle Cradles/Snap-on Cables and ZQ500/QLn Series Printers (VAM-MPP-VHCH1-01)</p>
<p>CBL-TC7X-DEX1-01</p>		<p>Snap-on DEX Cable</p>	<ul style="list-style-type: none"> ▶ Attaches to rear accessory port on TC7X ▶ Can't be used at same time as other Snap-on accessories ▶ Does not provide device charging. ▶ Rev C and higher versions of cable no longer block view of rear facing camera. 	
<p>CBL-TC7X-USB1-02</p>		<p>Snap-on ZQ6/QLn Series Printer Cable</p>	<ul style="list-style-type: none"> ▶ Connects via USB connection to printer. ▶ Uses twist-lock on printer connector. ▶ 6 ft. straight cable ▶ Attaches to rear accessory port on TC7X ▶ Can't be used at same time as other Snap-on accessories ▶ Does not block view of rear facing camera. ▶ NOTE: This is a custom product. Please work with your Zebra representative to open a Custom Product Request (CPR) if you would like to order this cable. 	
<p>CBL-TC7X-USBHD-01</p>		<p>Snap-on USB-C Adapter Cable</p>	<ul style="list-style-type: none"> ▶ Connects to TC7X series to accessories with USB-C cable. ▶ Typically used with production version of HD4000 Heads Up Display (HUD). ▶ Cable length is 80cm/approx 32". ▶ Does not block view of rear facing camera. ▶ Includes 2 alligator clips for attaching cable to clothing. ▶ See the HD4000 Technical Accessory Guide (TAG) for additional details. 	


3rd party *		USB micro-A to USB A Female adapter	<ul style="list-style-type: none"> ▶ Allows the TC7X to act as a USB host to connect to devices like USB flash drives/memory sticks, mice, etc. ▶ Connects to 2-Slot USB ShareCradle 	
-------------	---	-------------------------------------	--	--






(see <http://www.cyberguys.com/product-details/?productid=33062>)

Snap-On Accessories





Part Number	Picture	Description	Notes	Required Items
MSR-TC7X-SNP1-01		Snap-on Mag Stripe Reader (MSR)	<ul style="list-style-type: none"> ▶ Reads Tracks 1, 2, & 3. ▶ Offers Point-to-point encryption (P2PE) w/ Encryption for Tracks 1, 2, & 3, supporting TDES/DUKPT & AES/DUKPT. ▶ Compatible with Hand strap, Holster, Charge-Only Cradles, and Charging Cable Cups. ▶ NOT compatible with other snap on accessories or USB/Ethernet cradles ▶ Allows access to rear facing camera 	
TRG-TC7X-SNP1-02		Snap-on Pistol Grip Trigger Handle	<ul style="list-style-type: none"> ▶ Transforms device into all-touch handle style terminal for use in high volume scanning operations ▶ 6.4 oz weight with spring back trigger designed for repetitive scanning. ▶ Trigger pull will awake device. ▶ Trigger can be easily removed for battery access. ▶ Compatible with Holster for Trigger Handle devices, Charge-Only Cradles, and Charging Cable Cups. ▶ Integrated three point stand allows device to be rested when not in use. ▶ NOT compatible with Hand Strap, other snap on accessories or USB/Ethernet cradles. ▶ NOTE: Even when Handle is removed from TC7X, the cleat may interfere with the device fitting into USB/Ethernet cradles. The cleat may need to be removed when using these cradles. Alternatively, ADP-TC7X-CLPTH1-20 can be used instead of standard tethered cleat. This alternative cleat will not interfere with cradle access. ▶ Includes trigger handle clip/cleat that replaces the TC7X's existing hand strap clip. ▶ Now includes tether strap to prevent Pistol Grip and Cleat from being separated - see ADP-TC7X-CLHTH-10 for details. ▶ Now provides additional spring tension on pistol grip to TC7X connection points. ▶ Can be used with Wrist Strap (50-12500-066), although included tether strap can also be used for this. ▶ Blocks view of rear facing camera 	

<p>TRG-TC7X-SNP1-01</p>		<p>Snap-on Pistol Grip Trigger Handle</p>	<ul style="list-style-type: none"> ▶ Discontinued 6/2016, now use TRG-TC7X-SNP1-02 - see PMB 2819 ▶ Transforms device into all-touch handle style terminal for use in high volume scanning operations ▶ 6.4 oz weight with spring back trigger designed for repetitive scanning. ▶ Trigger pull will awake device. ▶ Trigger can be easily removed for battery access. ▶ Compatible with Holster for Trigger Handle devices, Charge-Only Cradles, and Charging Cable Cups. ▶ Integrated three point stand allows device to be rested when not in use. ▶ NOT compatible with Hand Strap, other snap on accessories or USB/Ethernet cradles. ▶ Includes trigger handle clip/cleat (P/N 42.18V37.001) that replaces the TC7X's existing hand strap clip. ▶ Can be used with Wrist Strap (50-12500-066) ▶ Blocks view of rear facing camera 	
<p>23-7X-09-TG-01 (3rd party) *</p> <p>Order through ScanSource in NA/EMEA or through POSPOS in APAC.</p> <p>http://www.tis-gmbh.de/en/</p>		<p>Trigger Handle</p>	<ul style="list-style-type: none"> ▶ Simple compact trigger handle. Trigger handle mechanically presses the scan trigger button on the TC70 or the PTT button on the TC75/TC70x/TC75x when the trigger handle is pulled (PTT button requires re-mapping to perform scan). ▶ TC7X snaps into place on the Handle ▶ Gun form factor allows ergonomically optimized scanning position. ▶ Designed to provide comfortable balance in the hands of the user. ▶ TC7X can be recharged in Single or Multi-Slot cradles with the trigger handle installed. ▶ Does not block access to camera on back of TC7X. ▶ Includes stylus holder and tether point for stylus tether. ▶ TC7X Handstrap does not need to be removed to use with Handle. ▶ Handle must be removed to swap battery on device. ▶ Trigger mechanism was designed for over 1 million pulls. 	
<p>ADP-TC7X-AUDIO1-01</p>		<p>Snap-on Audio Adapter (2.5mm jack)</p>	<ul style="list-style-type: none"> ▶ Provides standard 2.5mm barrel jack connector ▶ Features Internal sealing and Rubber sealing to reduce connector corrosion and jack exposure. Ability to attach without removing hand strap and no need to detach to access the battery. Camera, Flash and IRDA window exposed. ▶ NOT compatible with other snap on accessories or USB/Ethernet cradles ▶ Allows access to rear facing camera ▶ Discontinued 5/2017, now use KIT-TC7X-AUDL35-01. 	

ADP-TC7X-AUD35-01		Snap-on Audio Adapter (3.5mm jack)	<ul style="list-style-type: none"> ▶ Provides 3.5mm barrel jack connector ▶ Audio jack is at the end of a 3.5" pigtail cable extending from the rear of the adapter. ▶ Features Internal sealing and Rubber sealing to reduce connector corrosion and jack exposure. Ability to attach without removing hand strap and no need to detach to access the battery. Camera, Flash and IRDA window exposed. ▶ NOT compatible with other snap on accessories or USB/Ethernet cradles ▶ Allows access to rear facing camera. 	
KIT-TC7X-AUDL35-01		Snap-on Audio Adapter (3.5mm jack) with Retention and Anti-Rotation Lock/Clip	<ul style="list-style-type: none"> ▶ Provides 3.5mm barrel jack connector that is keyed/collared for a locking failsafe connection with matching cables and headsets. ▶ Audio jack is at the end of a 3.5" pigtail cable extending from the rear of the adapter. ▶ Features Internal sealing and Rubber sealing to reduce connector corrosion and jack exposure. Ability to attach without removing hand strap and no need to detach to access the battery. Camera, Flash and IRDA window exposed. ▶ NOT compatible with other snap on accessories or USB/Ethernet cradles ▶ Allows access to rear facing camera. ▶ Includes Snap-on 3.5mm Audio Adapter (ADP-TC7X-AUD35-01) and Retention/Anti-Rotation Lock (ADP-LOCK-3.5HT1-01) 	
23-7X-09-TSO-01 (for Agilion) 23-7X-09-TSO-02 (for Solcon) 23-7X-09-TSO-03 (for Ubisense) (3rd party) * http://tis-gmbh.de/en		TIS snap-on RTLS Transponder	<ul style="list-style-type: none"> ▶ Provides Real-Time Location System (RTLS) tracking of the TC7X from various RTLS application providers. ▶ Transponder is powered from the TC7X ▶ Does not block access to camera. ▶ TC7X can still be docked in Charge-Only cradles and will also work with TIS Snap-on Pistol Grip Trigger Handle (23-7X-09-TG-01) ▶ LED on snap-on indicates transponder is being powered. 	
Soft Goods - Cases/Holsters				
Part Number	Picture	Description	Notes	Required Items
SG-TC7X-RHLSTR1-01		Rigid Holster	<ul style="list-style-type: none"> ▶ TC7X Rigid Holster w/ snap in Design to accommodate hand strap and Snap-ons (e.g. MSR) for easy insertion/removal ▶ Rotating Belt Clip with ability to insert in either direction. ▶ NOT compatible with Trigger Handle 	






<p>SG-TC7X-HLSTR1-02</p>		<p>Soft Holster</p>	<ul style="list-style-type: none"> ▶ Vertical orientation with Open Bucket design to accommodate hand strap and Snap-ons such as the MSR for easy insertion and removal. ▶ Includes Loop and tether point for optional stylus. ▶ Non rotating for maximum durability. ▶ Opening at bottom of holster for providing drainage and route for audio from device's speaker. ▶ Uses improved materials vs. SG-TC7X-HLSTR1-01 	
<p>SG-TC7X-HLSTR1-01</p>		<p>Soft Holster</p>	<ul style="list-style-type: none"> ▶ Discontinued 2/2016, now use SG-TC7X-HLSTR1-02 - PMB 2769 ▶ Vertical orientation with Open Bucket design to accommodate hand strap and Snap-ons such as the MSR for easy insertion and removal. ▶ Includes Loop and tether point for optional stylus. ▶ Non rotating for maximum durability. ▶ Opening at bottom of holster for providing drainage and route for audio from device's speaker. 	
<p>SG-TC7X-HLSTR2-01</p>		<p>Soft Holster, Drop-in style</p> 	<ul style="list-style-type: none"> ▶ Includes adjustable belt loop designed to be attached to belt. ▶ TC7X inserts into holster with screen facing user's leg. ▶ NOTE: This is a custom product. Please work with your Zebra representative to open a Custom Product Request (CPR) if you would like to order this item. 	
<p>SG-TC7X-HLSBELT-WM</p>		<p>Belt Mount Holster</p>	<ul style="list-style-type: none"> ▶ NOTE: This is a custom product. Please work with your Zebra representative to open a Custom Product Request (CPR) if you would like to order this item. 	

<p>TM-CTC70 (3rd party) *</p> <p>http://www.taylormadecases.com</p>		<p>TC7X Case</p>	<ul style="list-style-type: none"> ▶ Includes D ring and hand strap ▶ Provides access to camera 	
<p>AC1755DWSP (3rd party) *</p> <p>http://www.ultimacase.com</p>		<p>Holster for TC7X with Snap-On Trigger Handle</p> 	<ul style="list-style-type: none"> ▶ Holsters TC70 units using Trigger Handle (TRG-TC7X-SNP1-01) ▶ Made with durable easy care Ballistic nylon ▶ Belt loop designed for left or right handed users ▶ Exterior pocket holds spare battery ▶ Drain hole in case of inclement weather 	
<p>TM-CTC70G (3rd party) *</p> <p>http://www.taylormadecases.com</p>		<p>Case for TC7X with Pistol Grip Trigger Handle</p>	<ul style="list-style-type: none"> ▶ Full access to touch screen ▶ Includes D ring 	

<p>TM-HUTC70 (3rd party) *</p> <p>http://www.taylormadecases.com</p>		<p>Holster for TC7X with Pistol Grip Trigger Handle</p>	<ul style="list-style-type: none"> ▶ Includes slide clip on back and small front elastic pocket. 	
<p>TM-WS-TC70 (3rd party) *</p> <p>http://www.taylormadecases.com</p>		<p>Wrist Mount Holster</p>	<ul style="list-style-type: none"> ▶ Allows TC7X to be worn as a wearable device. ▶ Full access to touch screen 	
<p>(3rd party) *</p> <p>http://www.ultimacase.com</p> <p>http://www.taylormadecases.com</p>		<p>Additional Cases & Holsters for TC7X</p>		
<p>A1234ST (3rd party) *</p> <p>https://shilpitrading.com</p>		<p>Soft Wearable Holster</p>	<ul style="list-style-type: none"> ▶ Durable Ballistic Nylon Holster. ▶ Elastic side panels expand to accommodate varying device types and battery sizes. ▶ Compatible with MC55, MC6x, MC7x, and TC7x. ▶ Covered Belt Clip for quick on/off waist belt. ▶ Retaining strap at top to secure device in holster. ▶ Includes D-rings for optional shoulder strap use. ▶ Elastic loop on each side can be used for storing stylus. ▶ Can be used with optional Waist Belt for Holster (A1227ST) or Shoulder Strap (A1236ST) 	


<p>A1217ST (3rd party) *</p> <p>https://shilpitrading.com</p>		<p>Soft Wearable Holster with Shoulder Strap</p>	<ul style="list-style-type: none"> ▶ Leather-like material with smooth finish. ▶ Elastic side panels expand to accommodate varying device types and battery sizes. ▶ Compatible with MC55, MC6x, MC7x, and TC7x. ▶ Covered Belt Clip for quick on/off waist belt. ▶ Retaining strap at top to secure device in holster. ▶ Includes D-rings for use with included shoulder strap. ▶ Shoulder Strap is 3/8" wide and adjustable to 70" length. ▶ Elastic loop on each side can be used for storing stylus. ▶ Can be used with optional Waist Belt for Holster (A1227ST). 	
<p>A1216ST (3rd party) *</p> <p>https://shilpitrading.com</p>		<p>Soft Wearable Dual Holster with Shoulder Strap</p>	<ul style="list-style-type: none"> ▶ Leather-like material with smooth finish. ▶ Includes two pockets - one for device and another for cell phone, mobile payment unit or spare battery. ▶ Elastic side panels expand to accommodate varying device types and battery sizes. ▶ Compatible with MC55, MC6x, MC7x, and TC7x. ▶ Covered Belt Clip for quick on/off waist belt. ▶ Retaining strap at top to secure device in holster. ▶ Includes D-rings for use with included shoulder strap. ▶ Shoulder Strap is 3/8" wide and adjustable to 70" length. ▶ Elastic loop on each side can be used for storing stylus. ▶ Can be used with optional Waist Belt for Holster (A1227ST). 	
<p>SG-TC7X-HSTR2-03 (pack of 3)</p>		<p>Replacement Handstraps</p>	<ul style="list-style-type: none"> ▶ Leather and Hypalon Pad for maximum comfort & wear resistance ▶ Adjustable Velcro design provides comfort to support a wide range of hand sizes while resisting wear in rugged environments. ▶ Also provides a loop and tether point for the optional stylus. ▶ Plastic Clip latches into terminal for easy insertion and removal. ▶ Has improved handstrap materials vs. SG-TC7X-HSTRP1-03 	


<p>SG-TC7X-HSTRP1-03 (pack of 3)</p>		<p>Replacement Handstraps</p>	<ul style="list-style-type: none"> ▶ Discontinued 11/2016, now use SG-TC7X-HSTR2-03 - PMB 2835 ▶ Leather and Hypalon Pad for maximum comfort & wear resistance ▶ Adjustable Velcro design provides comfort to support a wide range of hand sizes while resisting wear in rugged environments. ▶ Also provides a loop and tether point for the optional stylus. ▶ Plastic Clip latches into terminal for easy insertion and removal. 	
<p>SG-TC7X-CUSTRP2-01 (single)</p> <p>SG-TC7X-CUSTRP2-03 (pack of 3)</p>		<p>Extended Length Handstrap</p>	<p>▶ NOTE: This is a custom product. Please work with your Zebra representative to open a Custom Product Request (CPR) if you would like to order this item.</p>	
<p>SG-MC33-LNYDB-01</p>		<p>Lanyard</p>	<ul style="list-style-type: none"> ▶ Allows unit to be attached to a retractable lanyard. ▶ Lanyard can be worn cross-body using included strap or strap can be removed and lanyard can be attached to belt. ▶ Standard TC7X handstrap must be removed to allow lanyard to be attached. ▶ Not compatible with TC7X Pistol Grip trigger handle. ▶ Can be used with Belt Holster (11-08062-02R) 	




11-08062-02R		Belt for holster	<ul style="list-style-type: none"> ▶ Belt is 2 inches wide ▶ Extends to 48 inches ▶ Has improved buckle and softer belt material 	
11-08062-01R		Belt for holster	<ul style="list-style-type: none"> ▶ Belt is 2 inches wide ▶ Extends to 48 inches ▶ Discontinued 9/2009, replaced by 11-08062-02R 	
A1227ST (3rd party) * https://www.shilpitrading.com		Belt for Holster	<ul style="list-style-type: none"> ▶ Belt is 2 inches wide ▶ Extends to 48 inches ▶ Quick on/off snap buckle 	
V6198DW (3rd party) * http://www.ultimacase.com		Belt Extender	<ul style="list-style-type: none"> ▶ Used to extend the holster belt (11-08062-02R) an additional 10 inches 	
50-12500-066		Wrist Strap for Trigger Handle	<ul style="list-style-type: none"> ▶ Attaches to bottom of Snap-on Pistol Grip Trigger Handle (TRG-TC7X-SNP1-03) 	

Vehicle Cradles and Holders


Powered Cradles and Holders (provides device charging and/or communication)

Part Number	Picture	Description	Notes	Required Items
CRD-TC7X-VCD1-01		Vehicle Data Communication and Charge Cradle Kit with USB I/O Hub	<ul style="list-style-type: none"> ▶ Includes TC7X Vehicle Data Communication Device Holder/Cradle (CRD-TC7X-DCVH-01) and USB I/O Hub (SHARE-USBH-01) ▶ 15 pin connector connects Holder/Cradle to USB I/O Hub ▶ USB I/O Hub includes the following ports: <ul style="list-style-type: none"> - 3 standard USB A size ports - each can provide 1.5A current. - 1 USB A Charge-Only port - can provide 1.5A current for charging cell phones, tablets, headsets, etc. - 3.5mm headset jack ▶ TC7X is automatically placed in USB Host mode ▶ Accepts 12/24V power from vehicle and provides power conditioning (SAE/ISO) to TC7X ▶ Does NOT support snap on accessories. ▶ Supports Handstrap + Stylus. ▶ Cradle must be powered externally for USB ports to be functional. 	<p>For Charging: Cigarette Lighter Auto Charge Cable (CHG-AUTO-CLA1-01) OR Hard Wired Auto Charge Cable (CHG-AUTO-HWIRE1-01) OR Vehicle Charger Cable for Vehicle Cradles/Snap-on Cables and ZQ500/QLN Series Printers (VAM-MPP-VHCH1-01) OR Legacy Zebra Vehicle Cradle Adapter Cable (CBL-TC7X-GFS-01) OR Lind (Gamber-Johnson) Isolated Power Supply when installed on higher voltage vehicles</p> <p>For Mounting Cradle: Windshield Suction Mount (RAM-B-166U) OR Vehicle Cradle RAM mount ball (RAM-B-238U) and additional RAM mount hardware</p> <p>For Mounting I/O Hub: Mount on flat surface OR Vehicle Cradle RAM mount ball (RAM-B-238U) and additional RAM mount hardware</p>



<p>CRD-TC7X-DCVH-01</p>		<p>Vehicle Data Communication Device Holder/Cradle</p>	<ul style="list-style-type: none"> ▶ Does NOT support snap on accessories. ▶ Supports Handstrap + Stylus. ▶ 15 pin connector on cable is used to attach to USB I/O Hub (SHARE-USBH-01) 	<p>USB I/O Hub (SHARE-USBH-01)</p> <p>For Mounting: Windshield Suction Mount (RAM-B-166U) OR Vehicle Cradle RAM mount ball (RAM-B-238U) and additional RAM mount hardware</p>
<p>SHARE-USBH-01</p>		<p>USB I/O Hub for Vehicle Data Communication Cradle</p>		<p>Vehicle Data Communication Device Holder/Cradle (CRD-TC7X-DCVH-01)</p> <p>For Charging: Cigarette Lighter Auto Charge Cable (CHG-AUTO-CLA1-01) OR Hard Wired Auto Charge Cable (CHG-AUTO-HWIRE1-01) OR Vehicle Charger Cable for Vehicle Cradles/Snap-on Cables and ZQ500/QLn Series Printers (VAM-MPP-VHCH1-01) OR Legacy Zebra Vehicle Cradle Adapter Cable (CBL-TC7X-GFS-01) OR Lind (Gamber-Johnson) Isolated Power Supply when installed on higher voltage vehicles</p> <p>For Mounting: Mount on a flat surface OR Vehicle Cradle RAM mount ball (RAM-B-238U) and additional RAM mount hardware</p>
<p>CRD-TC7X-CVCD1-01</p>		<p>Charge-Only Vehicle Cradle</p>	<ul style="list-style-type: none"> ▶ Supports snap on TC7X accessories, excluding the Pistol Grip Trigger Handle. ▶ Uses unique tabs on power cable connector to ensure reliable power connection. ▶ Includes removable mounting plate that provides for quick removal of the cradle using a single thumb screw on the top of the cradle. 	<p>For Charging: Cigarette Lighter Auto Charge Cable (CHG-AUTO-CLA1-01) OR Hard Wired Auto Charge Cable (CHG-AUTO-HWIRE1-01) OR Auto Charger Cable for Vehicle Cradles/Snap-on Cables and ZQ510/ZQ520 Series Printer (VAM-MPP-VHCH1-01) OR Legacy Zebra Vehicle Cradle Adapter Cable (CBL-TC7X-GFS-01) OR Lind (Gamber-Johnson) Isolated Power Supply when installed on higher voltage vehicles</p> <p>For Mounting: Windshield Suction Mount (RAM-B-166U) OR Vehicle Cradle RAM mount ball (RAM-B-238U) and additional RAM mount hardware</p>





<p>KT-CRDVEHTC7-ADB</p>		<p>Charge-Only Vehicle Cradle KIT</p>	<ul style="list-style-type: none"> ▶ Supports snap on TC7X accessories, excluding the Pistol Grip Trigger Handle. ▶ Uses unique tabs on power cable connector to ensure reliable power connection. ▶ Includes removable mounting plate that provides for quick removal of the cradle using a single thumb screw on the top of the cradle. ▶ Kit includes Charge-Only Vehicle Cradle (CRD-TC7X-CVCD1-01) and Honeywell Legacy Vehicle Cradle Power Adapter Cable (ADPCBL-TC7X-USPS). ▶ NOTE: This is a custom product. Please work with your Zebra representative to open a Custom Product Request (CPR) if you would like to order this item. 	
<p>KT-CRDTC7XVEH-01</p>		<p>Charge-Only Vehicle Cradle KIT</p>	<ul style="list-style-type: none"> ▶ Supports snap on TC7X accessories, excluding the Pistol Grip Trigger Handle. ▶ Uses unique tabs on power cable connector to ensure reliable power connection. ▶ Includes removable mounting plate that provides for quick removal of the cradle using a single thumb screw on the top of the cradle. ▶ Kit includes Charge-Only Vehicle Cradle (CRD-TC7X-CVCD1-01), Hard Wired Auto Charge Cable (CHG-AUTO-HWIRE1-01), RAM Double Socket 3" Arm (MNT-RAM-B201U) and RAM Round Plate Base (MNT-RAM-B202U). ▶ NOTE: This is a custom product. Please work with your Zebra representative to open a Custom Product Request (CPR) if you would like to order this item. 	
<p>CRD-TC7X-DACH-01</p>		<p>Charge-Only Vehicle Cradle</p>	<ul style="list-style-type: none"> ▶ Cradle with integrated cigarette lighter adapter securely holds the TC7X in vehicles. ▶ Supports 12/24V vehicle systems. ▶ Uses same cradle design as Vehicle Data Communication Device Holder/Cradle (CRD-TC7X-DCVH-01) ▶ Does NOT support snap on accessories. ▶ Supports Handstrap + Stylus. ▶ NOTE: This is a custom product. Please work with your Zebra representative to open a Custom Product Request (CPR) if you would like to order this item. 	<p>For Mounting: Windshield Suction Mount (RAM-B-166U) OR Vehicle Cradle RAM mount ball (RAM-B-238U) and additional RAM mount hardware</p>

<p>23-7X-09-TPC-010 (Charge-Only Cigarette Lighter Adapter plug)</p> <p>23-7X-09-TPC-020 (Charge-Only Hard-wired power connection)</p> <p>(3rd party) *</p> <p>http://tis-gmbh.de/en</p>		<p>TIS Charge-Only Vehicle Cradle</p>	<ul style="list-style-type: none"> ▶ Available in both hard-wired and cigarette light adapter cable configurations ▶ Durable cradle design for rugged enterprise use ▶ AMPS hole pattern for simple wall, pedestal or vehicle dashboard mounting ▶ Swivel mount ▶ Does not include pictured RAM brackets 	
<p>various SKUs</p> <p>(3rd party) *</p> <p>http://www.proclipusa.com/category/zebra</p>		<p>ProClip Vehicle Cradles</p> <p>See Zebra's ProClip accessory overview video at: http://www.zebra.com/go/Products/ProductsByCategory/2372/2372-Overview</p>	<ul style="list-style-type: none"> ▶ Available in both powered and un-powered versions (cigarette lighter adapter or straight through power cable) ▶ Versions available with top support clip that holds the device in place for a secure fit. ▶ Versions available with USB interface for connecting to external devices. ▶ Does not work with snap-on accessories ▶ Cradle tilts and swivels ▶ Powered versions provide: <ul style="list-style-type: none"> - 10 Watts (2A) fast charging power - Hard wire to 12 / 24 V vehicle power sources - Black box converts from 12/24 V to 5.4 V output 	
<p>PSVTC70-01 (Charge-Only Cigarette Lighter Adapter plug)</p> <p>PSVTC70-02 (Charge-Only Hard-wired power connection)</p> <p>(3rd party) *</p> <p>http://www.portsmith.com</p>		<p>PortSmith Charge-Only Vehicle Cradles</p>	<ul style="list-style-type: none"> ▶ Available in both hard-wired and cigarette light adapter cable configurations ▶ Durable cradle design for rugged enterprise use ▶ AMPS hole pattern for simple wall, pedestal or vehicle dashboard mounting ▶ Swivel mount ▶ Supports snap-on accessories, including Pistol Grip Trigger Handle. 	

<p>RAM-HOL-ZE7U</p> <p>RAM-HOL-ZE7LU (includes key lock to secure device)</p> <p>RAM-HOL-ZE7CLU (includes combination lock to secure device)</p> <p>(3rd party) *</p> <p>https://www.rammount.com</p>		<p>RAM Charge-Only Vehicle Cradle</p>	<ul style="list-style-type: none"> ▶ Spring-loaded cradle allows easy one handed insertion and removal. ▶ Uses RAM GDS 5.5mm barrel jack connector for connection to power source. ▶ Compatible with RAM two-hole AMPS pattern diamond bases that will connect to B and C size ball mounts, allowing for a wide variety of mounting options. 	<ul style="list-style-type: none"> ▶ For Charging: RAM Cigarette Charger (RAM-POW-CIG-M55) OR RAM/GDS Modular Hardwire Charger (RAM-GDS-CHARGE-V7-M55U) ▶ For Mounting: RAM 2-hole AMPS pattern diamond ball mount (RAM-B-166U, RAM-B-238U or see RAM website for other options).
--	---	---------------------------------------	---	---

Un-Powered Cradles and Holders (passive holders, no charging support)

Part Number	Picture	Description	Notes	Required Items
<p>3PTY-PCLIP-710832</p>		<p>Forklift Cradle with 8" Post for Forklift Grill Mounting</p> 	<ul style="list-style-type: none"> ▶ Features a unique and rugged design that not only secures and protects the TC7X, but enables the operator to quickly and easily adjust the cradle position for optimal device access. ▶ A pivoting device securement arm on top of the cradle holds the TC7X firmly into the cradle during operation. ▶ Four vibration-mitigating pads on the back of the cradle dramatically reduce shock to the device. The pedestal mount features quick-adjust joints with interlocking teeth for superior strength and device stability in spite of excessive shock and vibration. ▶ Does NOT support snap on accessories. ▶ Supports Handstrap + Stylus. ▶ Does NOT charge TC7X ▶ NOTE: TC7X fits into cradle with display facing away from driver (for driver safety). It will not allow TC7X to be inserted with display facing the driver. ▶ NOTE: Restricted Product - Must open CPR at http://cpr.zebra.com (Zebra internal site). Sample devices shall then be provided, and once the customer approves these demo devices, the SKU shall be opened for sale to that customer. Refer to PMB 2756 for details. 	





<p>3PTY-PCLIP-710833</p>		<p>Forklift Cradle with 2" Post for Forklift Grill Mounting</p> 	<ul style="list-style-type: none"> ▶ Features a unique and rugged design that not only secures and protects the TC7X, but enables the operator to quickly and easily adjust the cradle position for optimal device access. ▶ A pivoting device securement arm on top of the cradle holds the TC7X firmly into the cradle during operation. ▶ Four vibration-mitigating pads on the back of the cradle dramatically reduce shock to the device. The pedestal mount features quick-adjust joints with interlocking teeth for superior strength and device stability in spite of excessive shock and vibration. ▶ Does NOT support snap on accessories. ▶ Supports Handstrap + Stylus. ▶ Does NOT charge TC7X ▶ NOTE: TC7X fits into cradle with display facing away from driver (for driver safety). It will not allow TC7X to be inserted with display facing the driver. ▶ NOTE: Restricted Product - Must open CPR at http://cpr.zebra.com (Zebra internal site). Sample devices shall then be provided, and once the customer approves these demo devices, the SKU shall be opened for sale to that customer. Refer to PMB 2756 for details. 	
<p>3PTY-PCLIP-241475</p>		<p>Heavy Duty Vehicle/Forklift Cradle with Vibration Damper</p>	<ul style="list-style-type: none"> ▶ Features a unique and rugged design that not only secures and protects the TC7X, but enables the operator to quickly and easily adjust the cradle position for optimal device access. ▶ A pivoting device securement arm on top of the cradle holds the TC7X firmly into the cradle during operation. ▶ Four vibration-mitigating pads on the back of the cradle dramatically reduce shock to the device. The pedestal mount features quick-adjust joints with interlocking teeth for superior strength and device stability in spite of excessive shock and vibration. ▶ Cradle uses AMPS hole pattern for attaching to brackets. ▶ Does NOT support snap on accessories. ▶ Supports Handstrap + Stylus. ▶ Does NOT charge TC7X ▶ NOTE: This is a custom product. Please work with your Zebra representative to open a Custom Product Request (CPR) if you would like to order this item. 	
<p>various SKUs (3rd party) *</p>		<p>ProClip Vehicle Cradles</p> <p>See Zebra's ProClip accessory overview video at: http://www.zebra.com/ems/pressroom/2012/04/24/ProClip.htm</p>	<ul style="list-style-type: none"> ▶ Available in both powered and un-powered versions (cigarette lighter adapter or straight through power cable) ▶ Versions available with top support clip that holds the device in place for a secure fit. ▶ Versions available with USB interface for connecting to external devices. ▶ Does not work with snap-on accessories ▶ Cradle tilts and swivels ▶ Powered versions provide: <ul style="list-style-type: none"> - 10 Watts (2A) fast charging power - Hard wire to 12 / 24 V vehicle power sources - Black box converts from 12/24 V to 5.4 V output 	
Vehicle Mounting Hardware				
<p>Part Number</p>	<p>Picture</p>	<p>Description</p>	<p>Notes</p>	<p>Required Items</p>






<p>3PTY-PCLIP-215772</p>		<p>Forklift Cradle Clamp Mount with Large Circular Holes</p> 	<ul style="list-style-type: none"> ▶ Attaches to roll bar of a forklift. It accommodates square, round and flat posts and comes with a variety of screw sizes. The circular hole pattern on the oval plate is designed to work with part number 3PTY-PCLIP-710832 and 3PTY-PCLIP-710833 in those instances where there is a need for affixing to a thicker post. ▶ Circled hole pattern for attachment of round mount base ▶ Comes with complete set of screws in various sizes, allowing for the forklift mount to span from 130 mm to 5 mm ▶ Weight capacity over 500 lbs ▶ NOTE: Restricted Product - Must open CPR at http://cpr.zebra.lan (Zebra internal site). Sample devices shall then be provided, and once the customer approves these demo devices, the SKU shall be opened for sale to that customer. Refer to PMB 2756 for details. 	<p>Forklift Cradle (3PTY-PCLIP-710832 or 3PTY-PCLIP-710833)</p>
<p>3PTY-PCLIP-241476</p>		<p>Forklift/Vehicle Cradle Clamp Mount - for Pipe/Bar mounting</p>	<ul style="list-style-type: none"> ▶ Attaches to circular pipes/bars of vehicles/forklifts. ▶ Accommodates bars from 3/4" to 1 1/8" diameter (19 to 30 mm). ▶ Uses AMPS hole pattern for mounting ProClip cradles like 3PTY-PCLIP-241475. ▶ NOTE: This is a custom product. Please work with your Zebra representative to open a Custom Product Request (CPR) if you would like to order this item. 	
<p>3PTY-PCLIP-241477</p>		<p>Forklift/Vehicle Cradle Clamp Mount with Backplate - for Pipe/Bar mounting</p>	<ul style="list-style-type: none"> ▶ Attaches to circular pipes/bars of vehicles/forklifts. ▶ Accommodates bars from 3/4" to 1 1/8" diameter (19 to 30 mm). ▶ Includes 3PTY-PCLIP-241476 with an attached backplate that uses AMPS hole pattern for mounting vehicle cradles. ▶ NOTE: This is a custom product. Please work with your Zebra representative to open a Custom Product Request (CPR) if you would like to order this item. 	
<p>3PTY-PCLIP-241478</p>		<p>Forklift/Vehicle Cradle Clamp Mount - for square frame mounting</p> 	<ul style="list-style-type: none"> ▶ Attaches to square bars of vehicles/forklifts. ▶ Clamp is 5.125" x 3.75" and can accommodate bars of varying thicknesses. ▶ 6" long arm on clamp uses AMPS hole pattern for mounting ProClip cradles like 3PTY-PCLIP-241475. 	

<p>3PTY-PCLIP-241479</p>		<p>Standard Duty 5" Pedestal Mount</p> 	<ul style="list-style-type: none"> ▶ Standard Duty mount is designed to be used in smooth-riding vehicles and areas with low risk of external contact. ▶ Length of arm assembly is 5". ▶ Uses AMPS hole pattern for mounting ProClip cradles like 3PTY-PCLIP-241475. ▶ NOTE: This is a custom product. Please work with your Zebra representative to open a Custom Product Request (CPR) if you would like to order this item. 	
<p>RAM-B-166U</p>		<p>Vehicle Cradle Windshield Suction Cup Mount</p>	<ul style="list-style-type: none"> ▶ RAM Twist Lock Suction Cup with Double Socket Arm and Diamond Base Adapter ▶ Overall Length: 6.75" ▶ Attaches to back of Vehicle Cradles 	
<p>RAM-B-238U</p>		<p>Vehicle Cradle RAM Mount ball</p>	<ul style="list-style-type: none"> ▶ RAM 2.43" x 1.31" Diamond Ball Base w/ 1" Ball ▶ Attaches to back of Vehicle Cradles 	<p>Requires additional RAM hardware to mount vehicle cradle</p>
<p>3PTY-PCLIP-215500</p>		<p>Tilt Swivel Mount For TC7X Vehicle Cradle</p> 	<ul style="list-style-type: none"> ▶ For mounting Vehicle Cradle on any flat surface. ▶ Angles/Tilts 15 degrees ▶ Swivels 360 degrees ▶ Extends 1 inch / 2.54 cm ▶ Base Plate and Face Plate has AMPS hole pattern ▶ Weight capacity 25 lbs / 11.34 kgs ▶ NOTE: Restricted Product - Must open CPR at http://cpr.zebra.com (Zebra internal site). Sample devices shall then be provided, and once the customer approves these demo devices, the SKU shall be opened for sale to that customer. Refer to PMB 2756 for details. 	<p>Vehicle Cradle (CRD-TC7X-CVCD1-01)</p>





<p>3PTY-PCLIP-710836</p>		<p>2" tall Pedestal Mounting Kit - Horizontal Adjustment, For TC7X Vehicle Cradle</p> 	<ul style="list-style-type: none"> ▶ 2 inch Solid-core Aluminum quick-adjust interlocking joint. ▶ The round bases provide an industry-standard 4-hole AMPS mounting pattern with approximately 20 degrees of rotation to facilitate the perfect mounting angle and device placement. ▶ Adjustable for optimal positioning ▶ Weight capacity over 300 lbs ▶ NOTE: Restricted Product - Must open CPR at http://cpr.zebra.lan (Zebra internal site). Sample devices shall then be provided, and once the customer approves these demo devices, the SKU shall be opened for sale to that customer. Refer to PMB 2756 for details. 	<p>Vehicle Cradle (CRD-TC7X-CVCD1-01)</p>
<p>3PTY-PCLIP-710834</p>		<p>4" tall Pedestal Mounting Kit For TC7X Vehicle Cradle - Horizontal & Vertical Adjustment</p> 	<ul style="list-style-type: none"> ▶ 4 inch Solid-core Aluminum quick-adjust interlocking joints. ▶ Mount also features a 2 inch 90-degree offset extension rod to enable both horizontal and vertical adjustment to achieve optimal device/cradle positioning. ▶ AMPS hole pattern in mount bases ▶ Quick and easy installation ▶ Adjustable for optimal positioning ▶ Weight capacity over 300 lbs ▶ NOTE: Restricted Product - Must open CPR at http://cpr.zebra.lan (Zebra internal site). Sample devices shall then be provided, and once the customer approves these demo devices, the SKU shall be opened for sale to that customer. Refer to PMB 2756 for details. 	<p>Vehicle Cradle (CRD-TC7X-CVCD1-01)</p>
<p>3PTY-PCLIP-710835</p>		<p>4" tall Pedestal Mounting Kit - Horizontal Adjustment, For TC7X Vehicle Cradle</p> 	<ul style="list-style-type: none"> ▶ 4 inch Solid-core Aluminum quick-adjust interlocking joints. ▶ Mount also features a 2 inch Horizontal extension rod between mount bases ▶ AMPS hole pattern in mount bases ▶ Quick and easy installation ▶ Adjustable for optimal positioning ▶ Weight capacity over 300 lbs ▶ NOTE: Restricted Product - Must open CPR at http://cpr.zebra.lan (Zebra internal site). Sample devices shall then be provided, and once the customer approves these demo devices, the SKU shall be opened for sale to that customer. Refer to PMB 2756 for details. 	<p>Vehicle Cradle (CRD-TC7X-CVCD1-01)</p>





3PTY-PCLIP-710837		6" tall Pedestal Mounting Kit - Horizontal & Vertical Adjustment, For TC7X Vehicle Cradle	<ul style="list-style-type: none"> ▶ 6 inch Solid-core Aluminum quick-adjust interlocking joint. ▶ The round bases provide an industry-standard 4-hole AMPS mounting pattern with approximately 20 degrees of rotation to facilitate the perfect mounting angle and device placement. ▶ Adjustable for optimal positioning ▶ Weight capacity over 300 lbs ▶ NOTE: Restricted Product - Must open CPR at http://cpr.zebra.lan (Zebra internal site). Sample devices shall then be provided, and once the customer approves these demo devices, the SKU shall be opened for sale to that customer. Refer to PMB 2756 for details. 	Vehicle Cradle (CRD-TC7X-CVCD1-01)
3PTY-PCLIP-710838		8" tall Pedestal Mounting Kit - Horizontal Adjustment, For TC7X Vehicle Cradle	<ul style="list-style-type: none"> ▶ 8 inch Solid-core Aluminum quick-adjust interlocking joint. ▶ The round bases provide an industry-standard 4-hole AMPS mounting pattern with approximately 20 degrees of rotation to facilitate the perfect mounting angle and device placement. ▶ Adjustable for optimal positioning ▶ Weight capacity over 300 lbs ▶ NOTE: Restricted Product - Must open CPR at http://cpr.zebra.lan (Zebra internal site). Sample devices shall then be provided, and once the customer approves these demo devices, the SKU shall be opened for sale to that customer. Refer to PMB 2756 for details. 	Vehicle Cradle (CRD-TC7X-CVCD1-01)
Misc				
Part Number	Picture	Description	Notes	Required Items
ADP-TC7X-BLKPLT-20 (pack of 20)		Replacement Blank/Filler for Handstrap or Cleat	<ul style="list-style-type: none"> ▶ Replacement filler that is typically included with each TC7X device. These fillers are removed when using the hand strap or pistol grip trigger handle. ▶ Attaches under battery. 	

<p>ADP-TC7X-CLPTH1-20 (pack of 20)</p>		<p>Replacement Cleat for Trigger Handle</p>	<ul style="list-style-type: none"> ▶ Attaches under battery and provides attachment point for the Snap-on Pistol Grip Trigger Handle (TRG-TC7X-SNP1-01). ▶ This cleat does not interfere with the use of Ethernet/USB cradles. ▶ Internal P/N for individual cleat is 42.18V37.001 	
<p>ADP-TC7X-CLHTH-10 (pack of 10)</p>		<p>Replacement Cleat and Handstrap for Trigger Handle</p>	<ul style="list-style-type: none"> ▶ Attaches under battery and provides attachment point for the Snap-on Pistol Grip Trigger Handle (TRG-TC7X-SNP1-02) ▶ Includes Handstrap (tether strap) (see SG-TC7X-TRGHSTRP-03) to prevent Pistol Grip and Cleat from being separated. ▶ One Cleat and Handstrap is normally included with each Trigger Handle ▶ NOTE: Use of this cleat may interfere with the device fitting into USB/Ethernet cradles. The cleat may need to be removed when using these cradles. Alternatively, ADP-TC7X-CLPTH1-20 can be used instead of this cleat. 	
<p>SG-TC7X-TRGHSTRP-03</p>		<p>Replacement Handstrap/Tether for Trigger Handle (pack of 3)</p>	<ul style="list-style-type: none"> ▶ Used to tether Cleat (see ADP-TC7X-CLHTH-10) to Trigger Handle (TRG-TC7X-SNP1-02). ▶ Prevents loss or misplacement of the Cleat. ▶ These are replacement straps. One strap is normally included with each Trigger Handle (TRG-TC7X-SNP1-02) or Replacement Cleat (ADP-TC7X-CLHTH-10). 	
<p>SG-TC7X-STYLUS-03 (pack of 3)</p> <p>SG-TC7X-STYLUS-06 (pack of 6)</p> <p>NOTE: 6-pack is a custom product. Please work with your Zebra representative to open a Custom Product Request (CPR) if you would like to order this item.</p>		<p>Stylus Kit with Tether</p>	<ul style="list-style-type: none"> ▶ Includes fine-pitch, capacitive Stylus (SG-TC7X-STYLUS1-03) and coiled tether (KT-TC7X-TETHER1-03) ▶ Conductive Carbon-filled plastic material w/ 5mm tip. ▶ Length of stylus is 3.5". ▶ Rigid plastic stylus is optimized for enterprise durability. ▶ Clip & tether point to reduce loss. Tether to Handstrap ▶ When not being used stylus can be stored in loop on Handstrap or in the optional Holster 	








<p>SG-TC7X-STYEX1-3 (pack of 3)</p>		<p>Extended Length Stylus</p>	<ul style="list-style-type: none"> ▶ Discontinued 2/2019 - see PMB 10057 ▶ Conductive Carbon-filled plastic material w/ 5mm tip ▶ Rigid plastic stylus is optimized for enterprise durability. ▶ Clip & tether point to reduce loss. ▶ When not being used stylus can be stored in optional Holster 	
<p>SG-STYLUS-TCX-MTL-03 (pack of 3)</p>		<p>Fiber Tipped Stylus</p>	<ul style="list-style-type: none"> ▶ Black Passive Stylus with Zebra logo ▶ 5" length ▶ Heavy duty - made from stainless steel and brass. No plastic parts - real pen feel. ▶ Can be used in rain. ▶ Micro-Knit Hybrid Mesh Fiber Tip provides silent, smooth gliding use. ▶ Big improvement over rubber tipped or plastic tipped stylus. ▶ Compatible with all capacitive touch screen devices. ▶ Can be tethered to device using KT-TC7X-TETHR1-03 or SG-ET5X-SLTETR-01. 	
<p>KT-TC7X-TETHR1-03 (pack of 3)</p>		<p>Replacement Coiled Tether for Stylus</p>	<ul style="list-style-type: none"> ▶ This tether is included with Stylus Kit with Tether (SG-TC7X-STYLUS-03) 	
<p>SG-ET5X-SLTETR-01 (single)</p>		<p>Replacement Coiled Tether for Stylus</p>	<ul style="list-style-type: none"> ▶ This tether is typically used with the ET5X series' stylus. 	
<p>SG-TC7X-SCRNTMP-01 (single)</p>		<p>Tempered Glass Screen Protector</p>	<ul style="list-style-type: none"> ▶ Compatible with TC70x/TC72/TC75x/TC77 series only (not TC70/TC75 series) 	
<p>Headset/Audio Accessories</p>				
<p>NOTE: Snap-On Audio adapter required to use wired headsets with all TC7x series devices - see Snap-On Accessories section above</p>				
Part Number	Picture	Description	Notes	Required Items


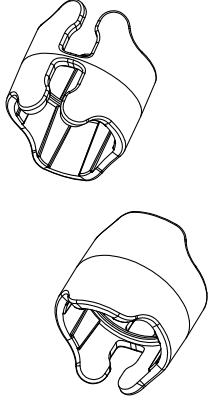
<p>HDST-35MM-PTT1-01</p>		<p>PTT and VoIP Headset (3.5mm Standard jack)</p>	<ul style="list-style-type: none"> ▶ For Push-To-Talk (PTT) and VoIP telephony ▶ Uses standard 3.5mm jack. ▶ Rotating earpiece allows for right or left ear configuration ▶ Built-in cord wrap ▶ mono with microphone ▶ includes clip for attaching PTT button to clothing. ▶ NOTE: Use of Locking connector headset (HDST-35MM-PTVP-01) is recommended. 	<p>TC7X Snap-on Audio Adapter (3.5mm jack) (ADP-TC7X-AUD35-01)</p>
<p>HDST-35MM-PTVP-01</p>		<p>PTT and VoIP Headset (3.5mm Locking jack)</p>	<ul style="list-style-type: none"> ▶ For Push-To-Talk (PTT) and VoIP telephony ▶ Uses 3.5mm rugged jack that is keyed/collared for a locking failsafe connection. ▶ Rotating earpiece allows for right or left ear configuration ▶ Built-in cord wrap ▶ mono with microphone ▶ includes clip for attaching PTT button to clothing. 	<p>TC7X Snap-on Audio Adapter (3.5mm jack) with retention and anti-rotation lock (KIT-TC7X-AUDL35-01)</p>
<p>HDST-25MM-PTVP-01</p>		<p>PTT and VoIP Headset (2.5mm jack)</p>	<ul style="list-style-type: none"> ▶ For Push-To-Talk (PTT) and VoIP telephony ▶ 2.5 mm jack ▶ Rotating earpiece allows for right or left ear configuration ▶ Built-in cord wrap ▶ mono with microphone ▶ includes clip for attaching PTT button to clothing. ▶ Recommend using 3.5mm headset (HDST-35MM-PTVP-01) instead since this feature a more secure locking jack connector. 	<p>2.5mm Snap-on Audio Adapter (ADP-TC7X-AUDIO1-01)</p>
<p>See HS2100-HS3100 Accessories Document</p>		<p>HS2100 Rugged Wired Headset</p>	<ul style="list-style-type: none"> ▶ Built to handle the everyday inevitable drops ▶ Dustproof, sprayproof and waterproof ▶ Ready for the freezer and outdoor subzero temperatures ▶ Feather-light for extraordinary comfort ▶ Noise cancellation for a superior voice experience in the noisiest environments ▶ Detachable swivel boom minimizes costs. ▶ Swivelling boom mutes microphone allowing uses to prevent voice pick applications from recognizing non-voice pick conversations. ▶ User-replaceable pads and windscreens maximize comfort and hygiene 	<p>HS2100 to 3.5mm Standard Cable (CBL-HS2100-3MS1-01) AND TC7X Snap-on Audio Adapter (3.5mm jack) with retention and anti-rotation lock (KIT-TC7X-AUDL35-01)</p> <p>See HS2100/HS3100 Accessories Document for additional headset accessories</p>
<p>VR12 (3rd party)* http://www.blueparrott.com</p>		<p>BlueParrott VR12 Wired Noise Cancelling Headset</p>	<ul style="list-style-type: none"> ▶ Audio accuracy for voice picking and other speech recognition applications. ▶ High quality durability stands up to all-day, every-day use. ▶ Lightweight design is easy and comfortable to wear all day. ▶ Compatible with most major wearable computers and devices used in voice-picking environments. ▶ G type (GN Netcom) Quick Disconnect. ▶ Convertible design gives choice of over-the-head and behind-the-neck wearing styles 	<p><u>Option 1</u> TC7X Snap-on Audio Adapter (3.5mm jack) with retention and anti-rotation lock (KIT-TC7X-AUDL35-01) AND Quick Disconnect Headset Adapter Cable (ADP-35M-QDCBL1-01)</p> <p><u>Option 2</u> 2.5mm Snap-on Audio Adapter (ADP-TC7X-AUDIO1-01) AND Quick Disconnect Adapter Cable (25-124387-02R)</p>

RCH51		Rugged Cabled Headset	<ul style="list-style-type: none"> ▶ Discontinued 12/2018, now use HS2100 series - PMB 2981 ▶ For VoIP use only, not Push-To-Talk (PTT) ▶ Improved to withstand chemicals in certain hair gels ▶ Noise cancelling microphone filters ambient noise inches away ▶ Extremely rugged strain relief features ensure cable bend tolerance, even at -30C ▶ IP67 sealing throughout the headset protects sensitive components from moisture and dust ▶ High-strength plastics survive 6' drop at -30C & 500 tumbles ▶ Weight: 4 oz. ▶ See RCH50/RCH51 Accessories Document for additional accessories. 	<p><u>Option 1</u> TC7X Snap-on Audio Adapter (3.5mm jack) with retention and anti-rotation lock (KIT-TC7X-AUDL35-01) AND Quick Disconnect Headset Adapter Cable (ADP-35M-QDCBL1-01)</p> <p><u>Option 2</u> 2.5mm Snap-on Audio Adapter (ADP-TC7X-AUDIO1-01) AND Quick Disconnect Adapter Cable (25-124387-02R)</p>
RCH50		Rugged Cabled Headset	<ul style="list-style-type: none"> ▶ Discontinued 10/2011, now use RCH51 ▶ Noise cancelling microphone filters ambient noise inches away ▶ Extremely rugged strain relief features ensure cable bend tolerance, even at -30C ▶ IP67 sealing throughout the headset protects sensitive components from moisture and dust ▶ High-strength plastics survive 6' drop at -30C & 500 tumbles ▶ Weight: 4 oz. ▶ See RCH50 Accessories Document for additional accessories. 	<p><u>Option 1</u> TC7X Snap-on Audio Adapter (3.5mm jack) with retention and anti-rotation lock (KIT-TC7X-AUDL35-01) AND Quick Disconnect Headset Adapter Cable (ADP-35M-QDCBL1-01)</p> <p><u>Option 2</u> 2.5mm Snap-on Audio Adapter (ADP-TC7X-AUDIO1-01) AND Quick Disconnect Adapter Cable (25-124387-02R)</p>
50-11300-050R		Noise Cancelling Headset	<ul style="list-style-type: none"> ▶ Discontinued 8/2011, now use RCH50 	<p><u>Option 1</u> TC7X Snap-on Audio Adapter (3.5mm jack) with retention and anti-rotation lock (KIT-TC7X-AUDL35-01) AND Quick Disconnect Headset Adapter Cable (ADP-35M-QDCBL1-01)</p> <p><u>Option 2</u> 2.5mm Snap-on Audio Adapter (ADP-TC7X-AUDIO1-01) AND Quick Disconnect Adapter Cable (25-124387-02R)</p>
3PTY-VXI-VR12 (Zebra orderable SKU)		BlueParrot VR12 Wired Noise Cancelling Headset	<ul style="list-style-type: none"> ▶ Discontinued 10/2018, now use HS2100 series - PMB 10005 ▶ Audio accuracy for voice picking and other speech recognition applications. ▶ High quality durability stands up to all-day, every-day use. ▶ Lightweight design is easy and comfortable to wear all day. ▶ Compatible with most major wearable computers and devices used in voice-picking environments. ▶ G type (GN Netcom) Quick Disconnect. ▶ Convertible design gives choice of over-the-head and behind-the-neck wearing styles 	<p><u>Option 1</u> TC7X Snap-on Audio Adapter (3.5mm jack) with retention and anti-rotation lock (KIT-TC7X-AUDL35-01) AND Quick Disconnect Headset Adapter Cable (ADP-35M-QDCBL1-01)</p> <p><u>Option 2</u> 2.5mm Snap-on Audio Adapter (ADP-TC7X-AUDIO1-01) AND Quick Disconnect Adapter Cable (25-124387-02R)</p>

<p>See HS2100-HS3100 Accessories Document</p>		<p>HS3100 Rugged Bluetooth Headset</p>	<ul style="list-style-type: none"> ▶ HD Voice, also known as Wide Band Audio, brings incredible audio clarity ▶ Built to handle the everyday inevitable drops ▶ Dustproof, sprayproof and waterproof ▶ Ready for the freezer and outdoor subzero temperatures ▶ Feather-light for extraordinary comfort ▶ Noise cancellation for a superior voice experience in the noisiest environments ▶ Swap batteries on the fly — without losing the Bluetooth connection ▶ Split-second tap-to-pair simplicity using NFC. ▶ Detachable swivel boom minimizes costs. ▶ Swivelling boom mutes microphone allowing uses to prevent voice pick applications from recognizing non-voice pick conversations. ▶ User-replaceable pads and windscreens maximize comfort and hygiene ▶ 15 hours of battery power 	<p>See HS2100/HS3100 Accessories Document for headset accessories</p>
<p>various Bluetooth models B550-XT B350-XT C400-XT C300-XT (3rd party) * http://www.blueparrott.com</p>		<p>BlueParrott Bluetooth Headsets</p>	<ul style="list-style-type: none"> ▶ Various Bluetooth models available with options that include: <ul style="list-style-type: none"> - Blocking out 96% of background noise - Over 24 hours of talk time - NFC Tap to Pair capable - Bluetooth wireless range capable up to 300 ft. - Convertible wearing options: over the head, behind the neck. <p>See BlueParrot site for model specific options.</p>	
<p>3PTY-VXI-B350XT (Zebra orderable SKU) http://www.vxicorp.com</p>		<p>BlueParrott Bluetooth Headset for voice directed applications</p>	<ul style="list-style-type: none"> ▶ Discontinued 10/2018, now use HS3100 series - PMB 10005 ▶ Used to enable Voice Directed Picking (VDP) or Speech Applications in warehouse environments when the use of a wireless headset is desired ▶ Not intended to support peer-to-peer communications (PTT) or VoIP calls. ▶ Provides 24 hours talk time. ▶ Allows the use of other BT devices (i.e. RS6000 scanner or mobile printer) ▶ Zebra Compatible certification for VDP application use with MC32. 	
<p>3PTY-VXI-B250XTP (Zebra orderable SKU) http://www.vxicorp.com</p>		<p>BlueParrott Bluetooth Headset for voice directed applications</p>	<ul style="list-style-type: none"> ▶ Discontinued 10/2018, now use HS3100 series - PMB 10005 ▶ Used to enable Voice Directed Picking (VDP) or Speech Applications in warehouse environments when the use of a wireless headset is desired ▶ Not intended to support peer-to-peer communications (PTT) or VoIP calls. ▶ Provides 20 hours talk time. ▶ Allows the use of other BT devices (i.e. RS6000 scanner or mobile printer) 	



<p>3PTY-VXI-EXPWAYII (Zebra orderable SKU)</p> <p>http://www.vxicorp.com</p>		<p>BlueParrott Bluetooth Headset for voice directed applications</p>	<ul style="list-style-type: none"> ▶ Discontinued 10/2018, now use HS3100 series - PMB 10005 ▶ Used to enable Voice Directed Picking (VDP) or Speech Applications in warehouse environments when the use of a wireless headset is desired ▶ Not intended to support peer-to-peer communications (PTT) or VoIP calls. ▶ Provides 8 hours talk time. ▶ Allows the use of other BT devices (i.e. RS6000 scanner or mobile printer) ▶ Zebra Compatible certification for VDP application use with MC92, VC70, WT41 and MC32. 	
<p>APTT1 (3rd party) *</p> <p>https://www.aina-wireless.com/</p>		<p>Aina Push-To-Talk (PTT) Bluetooth Voice Responder Remote Speaker/Mic (RSM)</p>	<ul style="list-style-type: none"> ▶ Bluetooth speaker-microphone designed to work with different walkie talkie style Push-to-Talk applications, including Zebra PTT Pro (check with Zebra PTT Pro engineering team for current device/OS support). ▶ Includes clip for attaching device to clothing for lapel speaker/mic usage. ▶ Features several buttons which the application developers can assign to different functions. ▶ Users can remotely control functions such as push-to-talk, phone calls, channel switching and emergency alerts. ▶ Device is ruggedized, MIL-STD 810G and IP67. ▶ Long lasting battery designed for 24 hour approx battery life. Can be recharged via micro-USB port. ▶ Includes 3.5mm headset jack allowing headphones to be connected for keeping conversations more private. ▶ Can be easily paired to mobile computer using NFC tap-to-pair. 	
<p>H3-B-1 (3rd party) *</p> <p>https://www.dellking.com</p>		<p>Wandfu H3 Push-To-Talk (PTT) Bluetooth Remote Speaker/Mic (RSM)</p>	<ul style="list-style-type: none"> ▶ Bluetooth speaker-microphone designed to work with different walkie talkie style Push-to-Talk applications, including Zebra PTT Pro (check with Zebra PTT Pro engineering team for current device/OS support). ▶ Includes clip for attaching device to clothing for lapel speaker/mic usage. ▶ Includes 3.5mm headset jack allowing headphones to be connected for keeping conversations more private. 	









<p>BTR-155 (3rd party) *</p>		<p>Savox BTR-155 Bluetooth Remote Speaker/Mic (RSM)</p>	<ul style="list-style-type: none"> ▶ Bluetooth speaker-microphone designed to work with different walkie talkie style Push-to-Talk applications, including Zebra PTT Pro (check with Zebra PTT Pro engineering team for current device/OS support). ▶ Includes clip for attaching device to clothing for lapel speaker/mic usage. ▶ Rugged wireless speaker microphone IP55. ▶ Allows cable-free movement ▶ Familiar speaker microphone functions; PTT and volume buttons ▶ Includes 2.5mm headset jack allowing headphones to be connected for keeping conversations more private. ▶ LED status indication ▶ High speaker volume ▶ Includes: <ul style="list-style-type: none"> - Savox RSM - Modular Wired earpiece - Wall Charger - USB Cable - Quick Start Guide - Carrying Strap 	
<p>K551011 (Zebra orderable SKU) ▶ Discontinued 3/2019, now order from Savox</p> <p>https://www.savoxaccessories.com</p>				
<p>BTH-101 (3rd party) *</p> <p>https://www.savoxaccessories.com</p>	 	<p>Savox Push-To-Talk (PTT) Bluetooth Headset</p>	<ul style="list-style-type: none"> ▶ Bluetooth headset designed to work with different walkie talkie style Push-to-Talk applications, including Zebra PTT Pro (check with Zebra PTT Pro engineering team for current device/OS support). ▶ Also operates as standard Bluetooth headset for taking phone calls. ▶ Device is lightweight and ruggedized, IP55. 	
<p>CBL-HS2100-3MS1-01</p>		<p>HS2100 Headset Standard Cable (3.5 mm jack)</p>	<ul style="list-style-type: none"> ▶ 3.5mm barrel jack connector ▶ For use with TC7X, TC8000, or other devices using a 3.5mm barrel jack audio connector ▶ Cable is 43" (1.1 M) long ▶ Rugged cable with rugged connectors that are keyed for failsafe connectivity ▶ Includes one clothing clip. Additional clips can be purchased separately. 	<p>TC7X Snap-on Audio Adapter (3.5mm jack) with retention and anti-rotation lock (KIT-TC7X-AUDL35-01)</p>
<p>25-124387-02R</p>		<p>RCH50/RCH51 Headset Adapter Cable</p>	<ul style="list-style-type: none"> ▶ Connects RCH50/RCH51 headset to devices with standard 3-pole 2.5mm barrel jack connector. ▶ Updated cable minimizes cross talk and intermittency issues. 	<p>2.5mm Snap-on Audio Adapter (ADP-TC7X-AUDIO1-01)</p>
<p>25-124387-01R</p>		<p>RCH50/RCH51 Headset Adapter Cable</p>	<ul style="list-style-type: none"> ▶ Discontinued 9/2013, now use 25-124387-02R ▶ Connects RCH50/RCH51 headset to devices with standard 3-pole 2.5mm barrel jack connector. 	<p>2.5mm Snap-on Audio Adapter (ADP-TC7X-AUDIO1-01)</p>

ADP-35M-QDCBL1-01		RCH50/RCH51 Quick Disconnect Headset Adapter Cable	<ul style="list-style-type: none"> ▶ Connects RCH50/RCH51 headset (or headsets with Quick-Disconnect connector) to devices with 3-pole 3.5mm barrel jack connector. ▶ Cable features a rugged keyed/collared jack for a locking failsafe connection. 	TC7X Snap-on Audio Adapter (3.5mm jack) with retention and anti-rotation lock (KIT-TC7X-AUDL35-01)
ADP-LOCK-3.5HT1-01		3.5mm Audio Adapter Retention and Anti-Rotation Lock	<ul style="list-style-type: none"> ▶ This clip is used with the Snap-on 3.5mm Audio Adapter (ADP-TC7X-AUD35-01) and keyed headset cables to prevent cable rotation/spinning and also to provide a secure, reliable headset connection. ▶ Clip is normally included with Snap-on 3.5mm Audio Adapter KIT (KIT-TC7X-AUDL35-01). ▶ NOTE: This is a Spare/Service Parts item. Contact an authorized Zebra reseller to order. 	





Power Cords/Power Supplies



AC Cords and Power Supplies

Part Number	Picture	Description	Notes	Required Items
CBL-DC-388A1-01		DC Power Cord	<ul style="list-style-type: none"> ▶ Used along with Power Supply PWR-BGA12V50W0WW to power 2-Slot Cradle and SACX000 4-Slot Battery Charger. ▶ Cable length is 1.8 meters 	
PWR-BGA12V50W0WW		Power Supply	<ul style="list-style-type: none"> ▶ Used to power 2-Slot Cradle and SACX000 4-Slot Battery Charger. ▶ 100-240 VAC, 12V, 4.16A, 50W ▶ Provides US DOE Level VI compliance for power efficiency. ▶ Replaces PWRS-14000-148R 	DC Line Cord (CBL-DC-388A1-01) and AC Line Cord (23844-00-00R)
KIT-PWR-12V50W		Power Supply Kit	<ul style="list-style-type: none"> ▶ Includes Power Supply (PWR-BGA12V50W0WW) and DC Line Cord (CBL-DC-388A1-01) 	AC Line Cord (23844-00-00R)
PWRS-14000-148R		Power Supply with integrated DC Cord	<ul style="list-style-type: none"> ▶ Discontinued 1/2017, now use PWR-BGA12V50W0WW and CBL-DC-388A1-01 - see PMB 2923 and PMB 2851 ▶ Replaces KT-14000-148R ▶ Used to power 2-Slot Cradle and SACX000 4-Slot Battery Charger ▶ 100-240 VAC, 12VDC, 3.33A ▶ Energy Star Compliant 	AC Line Cord (23844-00-00R)
50-14000-148R		Power Supply with integrated DC Cord	<ul style="list-style-type: none"> ▶ Discontinued 12/2007 - replaced by KT-14000-148R ▶ Used to power 2-Slot Cradle and SACX000 4-Slot Battery Charger 	AC Line Cord (23844-00-00R)




KT-14000-148R		Power Supply with integrated DC Cord	<ul style="list-style-type: none"> ▶ Replaces 50-14000-148R ▶ Used to power 2-Slot Cradle and SACX000 4-Slot Battery Charger ▶ Discontinued 12/2010 - now use PWRS-14000-148R 	AC Line Cord (23844-00-00R)
CBL-DC-383A1-01		DC Line Cord	<ul style="list-style-type: none"> ▶ Used to power Snap-On USB/Charge Cable with Power Supply PWR-BUA5V16W0WW ▶ Cable length is 6 ft. 	
PWR-BUA5V16W0WW		Power Supply	<ul style="list-style-type: none"> ▶ Used with Charging Cable Cup, Serial/Charge Cable, and USB/Charge Cable Cups ▶ 100-240VAC, 5.4V, 3A, 16W ▶ Meets US DOE Level VI efficiency standard ▶ Replaces PWRS-14000-249R 	DC Line Cord (CBL-DC-383A1-01) and AC Line Cord (50-16000-182R)
PWRS-14000-249R		Power Supply with integrated DC Cord	<ul style="list-style-type: none"> ▶ Discontinued 10/2016 in NALA and 1/2017 in EMEA/APAC - replaced by PWR-BUA5V16W0WW and CBL-DC-383A1-01 - PMB 2887. ▶ Replaces 50-14000-249R ▶ Used with Charging Cable Cup, Serial/Charge Cable, and USB/Charge Cable Cups ▶ 100-240VAC, 5.4 VDC, 3A ▶ Energy Star Compliant 	50-16000-182R
50-14000-147R		Power Supply with integrated DC Cord	<ul style="list-style-type: none"> ▶ Discontinued 12/2007 - replaced by 50-14000-249R ▶ Used with Charging Cable Cup, Serial/Charge Cable, and USB/Charge Cable Cups 	50-16000-182R
50-14000-249R		Power Supply with integrated DC Cord	<ul style="list-style-type: none"> ▶ Replaces 50-14000-147R ▶ Used with Communication/Charge Cable Cups ▶ Used with Charging Cable Cup, Serial/Charge Cable, and USB/Charge Cable Cups 	50-16000-182R
CBL-DC-381A1-01		DC Power Cord	<ul style="list-style-type: none"> ▶ Used to power 5-Slot ShareCradles when using Level VI Efficiency power supply (PWR-BGA12V108W0WW) ▶ This cable does not include the black extension release latch which is not required when used on Multi-Slot ShareCradles. ▶ CBL-DC-382A1-01 is still typically used though. 	
CBL-DC-382A1-01		DC Power Cord	<ul style="list-style-type: none"> ▶ Used with Power Supply PWR-BGA12V108W0WW to power 5-Slot ShareCradles. 	
50-16002-029R		DC Power Cord	<ul style="list-style-type: none"> ▶ Used with Power Supply PWRS-14000-241R to power 5-Slot ShareCradles. ▶ Discontinued 2/2017, now use CBL-DC-382A1-01 - PMB 2851 and 2933 	





PWR-BGA12V108W0WW		Power Supply	<ul style="list-style-type: none"> ▶ Used to power Four Slot Cradles ▶ 100-240 VAC, 12V, 9A, 108W ▶ Provides US DOE Level VI compliance for power efficiency. ▶ Replaces PWRS-14000-241R 	CBL-DC-382A1-01 and 23844-00-00R
PWRS-14000-241R		Power Supply	<ul style="list-style-type: none"> ▶ Replaces 50-14000-241R ▶ Used to power 5-Slot ShareCradles ▶ 100-240VAC, 12VDC, 9A ▶ Energy Star Compliant ▶ Discontinued 2/2017, now use PWR-BGA12V108W0WW - PMB 2851 and 2933 	50-16002-029R and 23844-00-00R
50-14001-004R		Power Supply	<ul style="list-style-type: none"> ▶ Discontinued 12/2007 - replaced by 50-14000-241R ▶ Used to power 5-Slot ShareCradles 	50-16002-029R and 23844-00-00R
50-14000-241R		Power Supply	<ul style="list-style-type: none"> ▶ Replaces 50-14001-004R ▶ Used to power 5-Slot ShareCradles ▶ Discontinued 12/2010 - now use PWRS-14000-241R 	50-16002-029R and 23844-00-00R
23844-00-00R		AC Line Cord	<ul style="list-style-type: none"> ▶ Used to power Cradles ▶ This AC Line Cord is for use in North America. See the AC Line Cords by Country TAG for comparable line cords to use in other countries. 	
50-16000-182R		AC Line Cord	<ul style="list-style-type: none"> ▶ Used with PWR-BUA5V16W0WW to power Snap-on charging cables. ▶ This AC Line Cord is for use in North America. See the AC Line Cords by Country TAG for comparable line cords to use in other countries. 	
In-Vehicle Power Supplies				
Part Number	Picture	Description	Notes	Required Items
CHG-AUTO-CLA1-01		Cigarette Lighter Auto Charger Cable for Vehicle Cradles	<ul style="list-style-type: none"> ▶ 12/24V ▶ Includes tab on Barrel jack end for ensuring a reliable connection to TC7X Vehicle Cradles. ▶ Only compatible with TC7X Vehicle Cradles (CRD-TC7X-VCD1-01 or CRD-TC7X-CVCD1-01) 	
RAM-POW-CIG-M55 (3rd party) * https://www.rammount.com		RAM Male Cigarette Plug with 3 meter Cable	<ul style="list-style-type: none"> ▶ Typically used with RAM Charge-Only Vehicle Cradle (RAM-HOL-ZE7U). 	



CHG-AUTO-HWIRE1-01		Hard Wired Auto Charger Cable for Vehicle Cradles	<ul style="list-style-type: none"> ▶ 12/24V ▶ Includes tab on Barrel jack end for ensuring a reliable connection to TC7X Vehicle Cradles. ▶ Bare wire end connects directly to vehicle power source. ▶ Only compatible with TC7X Vehicle Cradles (CRD-TC7X-VCD1-01 or CRD-TC7X-CVCD1-01) ▶ Approximate cable length is 13 ft. 	
CBL-TC7X-GFS-01		Zebra Legacy Vehicle Cradle Power Adapter Cable	<ul style="list-style-type: none"> ▶ Allows TC7X Vehicle Cradles to use power cables from legacy Zebra device vehicle cradles including: MC5x/MC6x, MC7x, MC9x-Brick, MC9x-Short, or MC95 which use cable SKUs 25-128973-01R, 25-61987-01R, or 25-128974-01R. ▶ Cable length is 11.5" ▶ NOTE: This is a custom product. Please work with your Zebra representative to open a Custom Product Request (CPR) if you would like to order this cable. 	
ADPCBL-TC7X-USPS		Honeywell Legacy Vehicle Cradle Power Adapter Cable	<ul style="list-style-type: none"> ▶ Allows TC7X Vehicle Cradles to use power cables from legacy Honeywell vehicle cradles providing 12V - typically Honeywell 99ex. ▶ Cable length is about 12". ▶ NOTE: This is a custom product. Please work with your Zebra representative to open a Custom Product Request (CPR) if you would like to order this cable. 	
VAM-MPP-VHCH1-01		Vehicle Charger Cable for Vehicle Cradles/Snap-on Cables and ZQ500/QLn Series Printers	<ul style="list-style-type: none"> ▶ Charger with charge both: <ul style="list-style-type: none"> (1) the TC7X Vehicle Cradles or TC7X Charging Cable Cup, Serial/Charge Cable, USB/Charge Cable Cups (2) a ZQ500/ZQ600/QLn series printer ▶ Includes the following: <ul style="list-style-type: none"> (1) Power Supply (P1093358) which has square locking connector and one USB-A port which can be used to charge an additional device. (2) cable for charging TC7X Vehicle Cradle (includes tab on Barrel jack end for ensuring a reliable connection to the cradle) and ZQ500/QLn printer (3) cable for charging TC7X Charging Cable Cup, Serial/Charge Cable, or USB/Charge Cable Cups and ZQ500/ZQ600/QLn printer. (4) Cigarette Lighter Adapter power cord (5) Hard Wired (bare wire) power cord <p>Choose preferred charging cable (2) or (3) and preferred power cord (4) or (5)</p>	

16411 (12-32 VDC input) 16412 (20-60 VDC input) 16515 (72-110 VDC input) Gamber Johnson (3rd party) * http://www.gamberjohnson.com		Lind 12V Isolated Power Supply for Vehicle Cradles	▶ Typically used when powering TC7X Vehicle Cradles (CRD-TC7X-VCD1-01 or CRD-TC7X-CVCD1-01) from higher voltage vehicles. ▶ Provides 12V DC output required by cradles.	
RAM-GDS-CHARGE-V7-M55U (3rd party) * https://www.rammount.com		RAM/GDS Modular Hardwire Charger	▶ Typically used with RAM Charge-Only Vehicle Cradle (RAM-HOL-ZE7U). ▶ Quick disconnect feature allows easy connections to any USB Type-A device for charging. ▶ Input Range: 8V - 40V DC ▶ Output Voltage: 5VDC ▶ Output Current: 2.5A max	

Batteries

Part Number	Picture	Description	Notes	Required Items
BTRY-TC7X-46MPP-01 (single) BTRY-TC7X-46MPP-10 (10 pack) BTRY-TC7X-46MPPBR (for use in Brazil)(single battery) BTRY-TC7X-46MPP-IN (for use in India)(single battery)	 	TC7X Spare 1X Battery with PowerPrecision Plus (4620 mAh) 	▶ Compatible with all TC7X series devices. Blue label on battery distinguishes from TC70/TC75 series battery (BTRY-TC7X-46MAH-01 / BTRY-TC7X-46MA2-01). ▶ NOTE: Spare Battery Chargers designed specifically for the TC70/TC75 series (CRD-TC7X-SE2CU1-01 and similar) will not charge this battery and may cause damage to the battery (see PMB 2863). ▶ Designed, manufactured & tested to meet rigorous controls & standards ▶ Premium-grade cells with higher capacity & longer life cycle ▶ Designed to help prevent overcharging & electrical shock ▶ Strong & robust housing for optimal performance & durability ▶ Information available: - Advanced state of Charge (shows the remaining battery power based on two factors: present charge and present real-time usage patterns of the device. - Advanced State of Health (highly accurate end-of-life prediction) - Dynamic usage patterns are constantly calculated, factoring in criteria such as the applications that are in use and scanning frequency).	

<p>BTRY-TC7X-46MAH-01 (single) BTRY-TC7X-46MAH-10 (10 pack)</p>		<p>TC70/TC75 Spare 1X Battery with PowerPrecision (4620 mAh)</p> 	<ul style="list-style-type: none"> ▶ Expected to be discontinued 2/2025, now use BTRY-TC7X-46MPP-01 or BTRY-TC7X-46MPP-10 - see PMB 10263. ▶ Only recommended for use in TC70/TC75 series. If used in TC70x/TC75x/TC72/TC77 battery will not give an accurate reading of the capacity or the state of health. For all charge levels the battery capacity indicator will read 50% (see PMB 2863). ▶ Designed, manufactured & tested to meet rigorous controls & standards ▶ Premium-grade cells with higher capacity & longer life cycle ▶ Designed to help prevent overcharging & electrical shock ▶ Strong & robust housing for optimal performance & durability ▶ Information available: <ul style="list-style-type: none"> - Available charge status - Total charge accumulated on the battery - Basic state of health 	
<p>BTRY-TC7X-46MA2-01 (single) BTRY-TC7X-46MA2-10 (10 pack)</p>		<p>TC70/TC75 Spare 1X Battery with PowerPrecision (4620 mAh)</p> 	<ul style="list-style-type: none"> ▶ Discontinued 1/2017, now use BTRY-TC7X-46MAH-01/BTRY-TC7X-46MAH-10 - see PMB 2918 ▶ Recommended for use in TC70/TC75 series only. - If used in TC70x/TC75x/TC72/TC77 battery will not give an accurate reading of the capacity or the state of health. For all charge levels the battery capacity indicator will read 50% (see PMB 2863). ▶ Designed, manufactured & tested to meet rigorous controls & standards ▶ Premium-grade cells with higher capacity & longer life cycle ▶ Designed to help prevent overcharging & electrical shock ▶ Strong & robust housing for optimal performance & durability ▶ Information available: <ul style="list-style-type: none"> - Available charge status - Total charge accumulated on the battery - Basic state of health 	

<p>BTRY-TC7X-62FEE-01 (single) BTRY-TC7X-62FEE-10 (10 pack)</p> <p>BTRY-TC7X-62FEE-01BR (for use in Brazil)(single battery) BTRY-TC7X-62FEE-01IA (for use in India)(single battery)</p>		<p>TC72/TC77 Spare 1.5X Battery with PowerPrecision Plus (6200 mAh)</p> 	<ul style="list-style-type: none"> ▶ Designed to be use with TC72/TC77 units only. Not compatible with older generation TC7X units. ▶ NOTE: Larger profile of battery prevents device from being used with most cradles (single slot, multi-slot or vehicle) and snap-on cables. <p>Device can be charged with the following:</p> <ul style="list-style-type: none"> - MC95 style multi-slot cradles (i.e. CRD-TC7X-RECO95-01) - Snap-on cables that connect to the device's rear I/O port (i.e. CBL-TC7X-USB1-01) <p>Also, battery is not compatible with Spare Battery Charger (toaster).</p> <ul style="list-style-type: none"> ▶ Designed, manufactured & tested to meet rigorous controls & standards ▶ Premium-grade cells with higher capacity & longer life cycle ▶ Designed to help prevent overcharging & electrical shock ▶ Strong & robust housing for optimal performance & durability ▶ Information available: <ul style="list-style-type: none"> - Advanced state of Charge (shows the remaining battery power based on two factors: present charge and present real-time usage patterns of the device. - Advanced State of Health (highly accurate end-of-life prediction) - Dynamic usage patterns are constantly calculated, factoring in criteria such as the applications that are in use and scanning frequency). <p>▶ NOTE: This is a custom product. Please work with your Zebra representative to open a Custom Product Request (CPR) if you would like to order this item.</p>	
---	---	---	--	--