



Smart Socket (code 27-3000/SMART)
& Smart Socket with Fast Charging (code 27-3054/SMART)



Install Guide

We recommend using a qualified electrician for installation. Please ensure that these instructions are read carefully and fully understood before commencing with installation.

Important safety warnings

CONTACT WITH MAINS ELECTRICITY CAN CAUSE SERIOUS INJURY OR DEATH.

- Do not open the back of the Smart Socket as this will void your warranty.
- Do not store or install this product in areas of high humidity.
- Do not insert any foreign objects into the openings of the Smart Socket.
- Do not cover or block the holes on the rear of the unit as they serve as ventilation.
- Do not use water or substances such as paint thinners, alcohol or strong cleaning solutions to clean the Smart Socket due to risk of damage to the plastic, electrocution or fire.
- Do not use the Smart Socket with a power supply different than 220-240 volts 50 Hz AC.
- To prevent fire hazard always use cable of the correct rating, size & type for the installation.
- Suitable for indoor use only.
- If the Smart Socket becomes damaged isolate all electrics and seek the advice from a qualified electrician.

Installation regulations

United Kingdom

The Smart Socket must be installed in accordance with the latest edition of the IEE Wiring (BS 7671) Regulations & Building Regulations.

Republic of Ireland

The Smart Socket must be installed in accordance with the ETCI National Rules for Electrical installations.




Download the
**Smart
Connekt App**
from your app
store.

Installation instructions

1. Switch off the mains power supply in the consumer unit (fuse box).
2. When retrofitting, remove the existing wall socket from the wall.
3. Prepare the mounting surface area clearing away any plaster debris and dust from the inside the mounting box.
4. If using the included spacer slide it over the back of the wall socket.
5. Following the diagram to the right push the cables into the relevant terminal blocks.
6. All earth wires must be sleeved and terminated to the backbox.
7. Tighten the terminal screws firmly and securely.
8. This device must be earthed.
9. Screw the wall socket securely to the wall using the screws provided.
10. Switch the mains supply back on in the consumer unit (fuse box) when the installation has been correctly completed.
11. Before use we recommend that a socket test is carried out using a socket tester.

Register your product


To receive a two year warranty please register your product by visiting: www.wificonnekt.co.uk and click on 'Register Product'. Registration must be completed within 30 days of purchase.

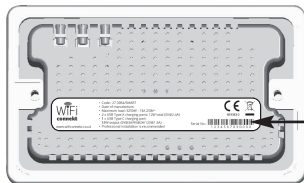

Warranty is void if the label is removed.

Note

Please follow installation guide diagram for best practice.

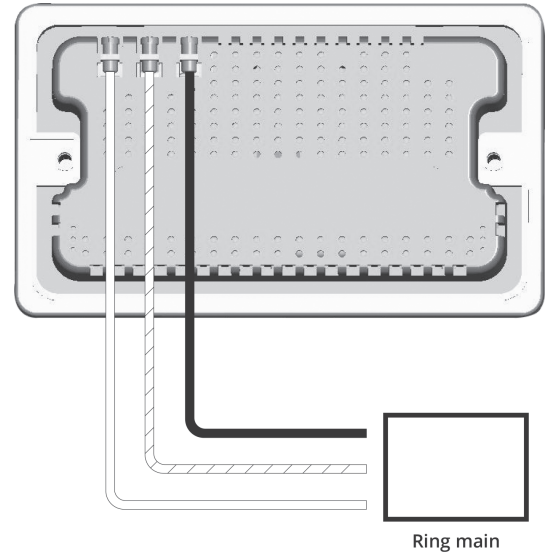

N (Neutral) = Black or Blue
L (Live) = Red or Brown
E (Earth) = Green/Yellow sleeving

Email • technical@wificonnekt.co.uk

Live Chat

Website • www.wificonnekt.co.uk

WiFi Connekt is a brand of Group Gear Ltd