

Quick Installation Guide

Wireless Dual Band Router


Set up with videos:

Scan the QR code or visit <https://www.tp-link.com/support/setup-video/#wi-fi-routers> to search for the setup video of your product.



1 Connect the Hardware

- If your internet comes from an Ethernet outlet, connect the router's **Internet** port to it, then follow Step 4 and Step 5.
- If you want to configure this new router as an access point to extend your network, refer to the **Access Point Mode** section on the back page.

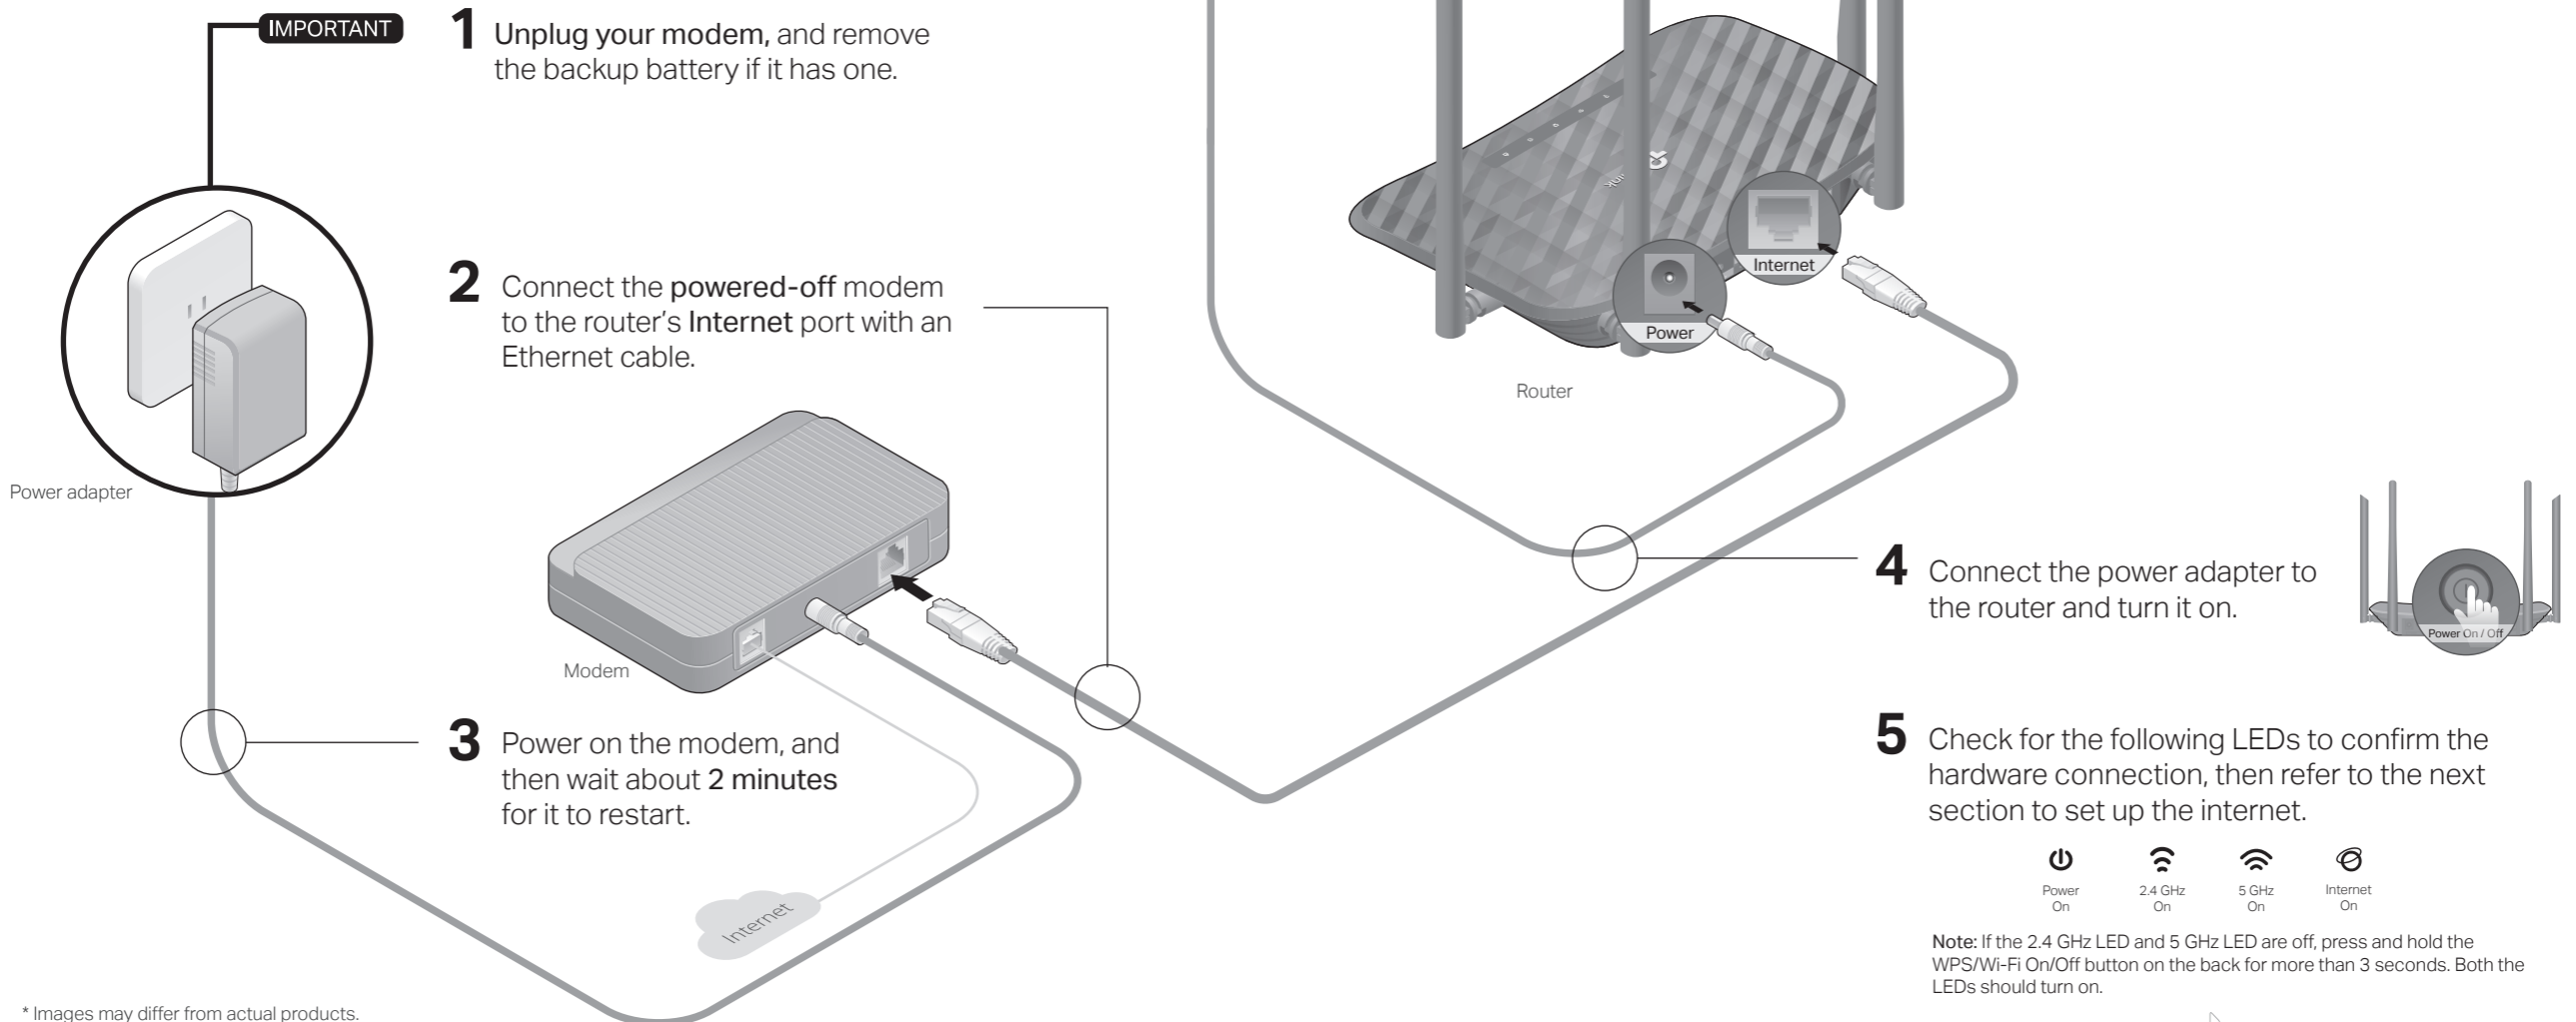

* Images may differ from actual products.

Note: If the 2.4 GHz LED and 5 GHz LED are off, press and hold the WPS/Wi-Fi On/Off button on the back for more than 3 seconds. Both the LEDs should turn on.

2 Set Up the Network

Method 1: Via TP-Link Tether App


1. Download the Tether app.



2. Open the Tether app and log in with your TP-Link ID.

Note: If you don't have an account, create one first.

3. Tap the + button in the Tether app and select Router > Wireless Router. Follow the steps to complete the setup and connect to the internet.

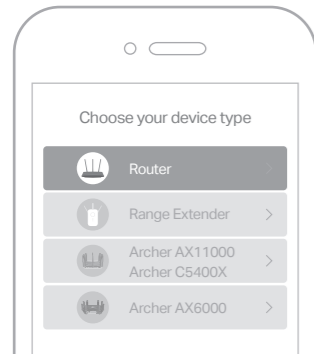

😊 Enjoy the internet !

Method 2: Via a Web Browser

1. Connect your device to the router (wired or wireless).

• Wired

Turn off the Wi-Fi on your computer and connect to the router using an Ethernet cable.

• Wireless

a Find the SSID (network name) and wireless password printed on the label at the bottom of the router.

b Click the network icon of your computer or go to Wi-Fi settings of your smart device, and then select the SSID to join the network.

2. Connect the router to the internet.

a Launch a web browser, and enter <http://tplinkwifi.net> or <http://192.168.0.1> in the address bar. Create a password to log in.

Note: If the login window does not appear, please refer to Q1 of Need Help? in this guide.




b Follow the step-by-step instructions to set up the internet connection and register for the TP-Link Cloud service.

😊 Enjoy the internet !

Access Point Mode

If you already have a router, you can switch this new router to Access Point mode to extend your existing network. Follow the steps below.

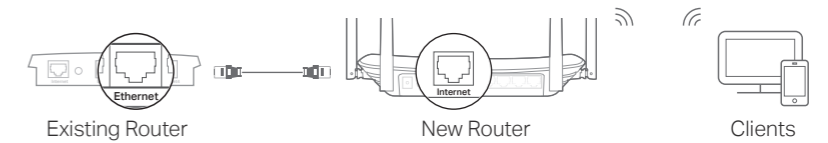

1. Power on the router.

2. Connect the router's Internet port to your existing router's Ethernet port via an Ethernet cable as shown above.

3. Connect a computer to the router via an Ethernet cable or wirelessly by using the SSID (network name) and Wireless Password printed on the label at the bottom of the router.

4. Launch a web browser, and enter <http://tplinkwifi.net> in the address bar. Create a password to log in.

5. Go to **Advanced > Operation Mode**, select **Access Point** and click **Save**. Wait for the router to reboot and follow the instructions to complete the setup.

😊 Enjoy the internet !

Button Explanation

BUTTON	DESCRIPTION
WPS/ Wi-Fi On/Off	Press and hold for 1 second to enable the WPS function. Press and hold for about 3 seconds to turn on or off the wireless function of the router.
Reset	Press and hold this button until the Power LED blinks to reset the router to its factory default settings.

Need Help?

Q1. What should I do if I cannot access the web management page?

- Reboot your router and try again.
- If the computer is set to a static IP address, change its settings to obtain an IP address automatically.
- Verify that <http://tplinkwifi.net> is correctly entered in the web browser. Alternatively, enter <http://192.168.0.1> or <http://192.168.1.1> in the web browser and press Enter.
- Use another web browser and try again.
- Disable and enable the network adapter being used.

Q2. What should I do if I cannot access the internet?

- Reboot your modem and router, then try again.
- Check if the internet is working normally by connecting a computer directly to the modem using an Ethernet cable. If it is not, contact your internet service provider.
- Log in to the web management page of the router, and go to the **Network Map** to check whether the internet IP address is valid or not. If it is not, check the hardware connection or contact your internet service provider.

- For cable modem users, log in to the web management page of the router. Go to **Advanced > Network > Internet > MAC Clone**, select **Use Current Computer MAC Address** and click **Save**. Then reboot both the modem and the router.

Q3. How do I restore the router to its factory default settings?

- With the router powered on, use a pin to press and hold the **Reset** button on the back until the Power LED blinks.
- Log in to the web management page of the router, go to **Advanced > System Tools > Backup & Restore**, and click **Factory Restore**. The router will restore and reboot automatically.

Q4. What should I do if I forget my web management page password?

- If you are using a TP-Link ID to log in, click **Forgot password** on the login page and then follow the instructions to reset it.
- Alternatively, refer to Q3 to reset your router, then visit <http://tplinkwifi.net> to create a new login password.

Q5. What should I do if I forget my wireless network password?

- If you have not changed the default wireless password, it can be found on the label at the bottom of the router.

- Connect a computer directly to the router using an Ethernet cable. Log in to the router's web management page at <http://tplinkwifi.net>, and go to **Wireless > Wireless Settings** to retrieve or reset your wireless password.

🕒 For technical support, replacement services, user guides, and other information, please visit <https://www.tp-link.com/support>, or simply scan the QR code.

📄 To communicate with TP-Link users or engineers, please join the TP-Link Community at <https://community.tp-link.com>.

✉️ If you have any suggestions or needs for our product guides, you are welcome to email techwriter@tp-link.com.cn.

Safety Information

- Keep the device away from water, fire, humidity or hot environments.
- Do not attempt to disassemble, repair, or modify the device.
- Do not use damaged charger or USB cable to charge the device.
- Do not use any other chargers than those recommended.
- Do not use the device where wireless devices are not allowed.
- Adapter shall be installed near the equipment and shall be easily accessible.

